




INSTALLATION MANUAL


IQ Hub
Software Version 3.0.1

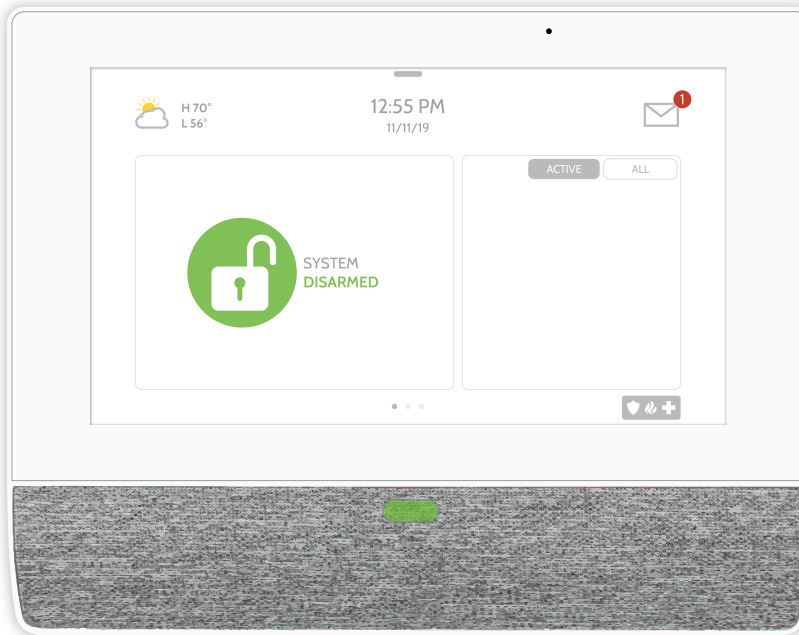


The IQ Hub is a 7" (~17.8 cm) touchscreen built with an Android operating system, providing full security and smart home functionality in an easy to use interface.

INCLUDED IN BOX



IQ Hub



Power
Supply



Back
Plate



ABOUT THIS GUIDE

This document outlines the basic hardware specifications and software directions to install and customize the IQ Hub. Note that the information presented is not comprehensive, but is specifically dedicated to those menus, features, and systems accessible solely to those with the proper installation code. Features accessible to users and installers alike are outlined in the IQ Hub User Guide. The information contained is confidential and proprietary, and is solely owned by Qolsys Inc. Any reproduction, modification or distribution without permission is strictly prohibited.

SUPPORT



QUESTIONS?

Contact us at
techsupport@qolsys.com

TABLE OF CONTENTS



PANEL OVERVIEW

- 5- Exterior Front
- 6- Exterior Back

INSTALLING THE PANEL

- 8- Wall Mount Option
- 9- Table Stand Option
- 10- Wiring Diagram
- 11- Powering the Panel

USER INTERFACE

- 13- Home Screen Overview
- 14- Message Center
- 15- Settings Tray

PROGRAMMING

- 17- Screen Lock
- 18- Settings
- 20- Advanced Settings
- 21- Setup Wizard
- 25- Installation
- 27- Installer/Dealer Settings
- 35- System Logs
- 36- Siren and Alarms
- 39- Security and Arming
- 42- Z-Wave Device List
- 43- Sound
- 47- Partitions
- 48- Local Automation

SECURITY SENSORS

- 51- Security Sensors
- 52- Auto Learn Sensor
- 53- Add Sensor

- 54- Partition Name
- 55- Sensor Type
- 56- Sensor Groups
- 72- Sensor Name
- 74- Chime Type
- 75- Voice Prompts
- 76- Source
- 77- Edit Sensor
- 78- Delete Sensor
- 79- Sensor Status
- 80- Sensor Group

WI-FI DEVICES

- 82- Wi-Fi Devices
- 84- Access Point Settings
- 85- AP Connected Devices
- 86- IQ Remote Devices

Z-WAVE™ DEVICES

- 88- Z-Wave Devices
- 89- Add Device
- 90- Clear Device
- 91- Delete Failed Device
- 92- Remove All Devices
- 93- View/Edit Associations
- 94- Z-Wave Settings
- 96- SmartStart
- 97- Provisioning List

BLUETOOTH DEVICES

- 99- Bluetooth Devices
- 100- Add Device
- 101- Edit Device
- 102- Delete Device

- 103- Remove All Devices
- 104- Settings
- 105- Add Speaker

SYSTEM TESTS

- 107- System Tests
- 109- Wi-Fi Test
- 110- Sensor Test
- 113- Cellular Test
- 114- Z-Wave Test
- 115- Rediscover Network
- 116- Neighbor Info
- 117- Counters
- 119- Z-Wave Diagnostics
- 120- Advanced Z-Wave Diag
- 121- PowerG Test
- 122- Dual Path Test
- 123- Daughter Cards Test
- 124- Panel Test

CUSTOMIZATION

- 126- User Management
- 127- Dealer Branding
- 128- Contact Info
- 129- On-Screen Branding
- 130- Connecting to Wi-Fi
- 131- Weather
- 132- Photo Frame

MAINTENANCE

- 136- Upgrade Software
- 137- Upgrade Software Using Wi-Fi
- 138- Upgrade Software Using AP
- 139- Automatic Background Check

- 140- Battery Replacement

TROUBLESHOOTING

- 142- About
- 145- Power Down
- 146- Panel Reboot
- 147- Hard Reboot
- 148- Panel Test Troubleshooting

LEGAL

- 150- Important Information

SPECIFICATIONS


- 160- Specifications
- 162- Supported PowerG Sensors
- 163- Supported 319 MHz Sensors
- 164- Supported 345 MHz Sensors
- 165- Supported 433 MHz Sensors

IQ HUB OVERVIEW


Warning: This Product should be installed in accordance with the National Fire Alarm Code, ANSI/NFPA 72, (National Fire Protection Association, Batterymarch Park, Quincy, MA 02269) and with National Electric Code, ANSI/NFPA 70. Printed information describing proper installation, operation, testing, maintenance, evacuation planning, and repair service is to be provided with this Product. In Canada the product shall be installed in accordance with the Standard for the Installation of Residential Fire Warning Systems, CAN/ULC-S540.

Warning: For Canadian installations this Product and all sensors associated with it (collectively, the “System”) should be tested once a week. The test shall be performed also with primary DC power de-energized. For recommended smoke detectors maintenance instructions refer to user manual associated with compatible Qolsys model QS5110-P840 smoke detector.

EXTERIOR FRONT

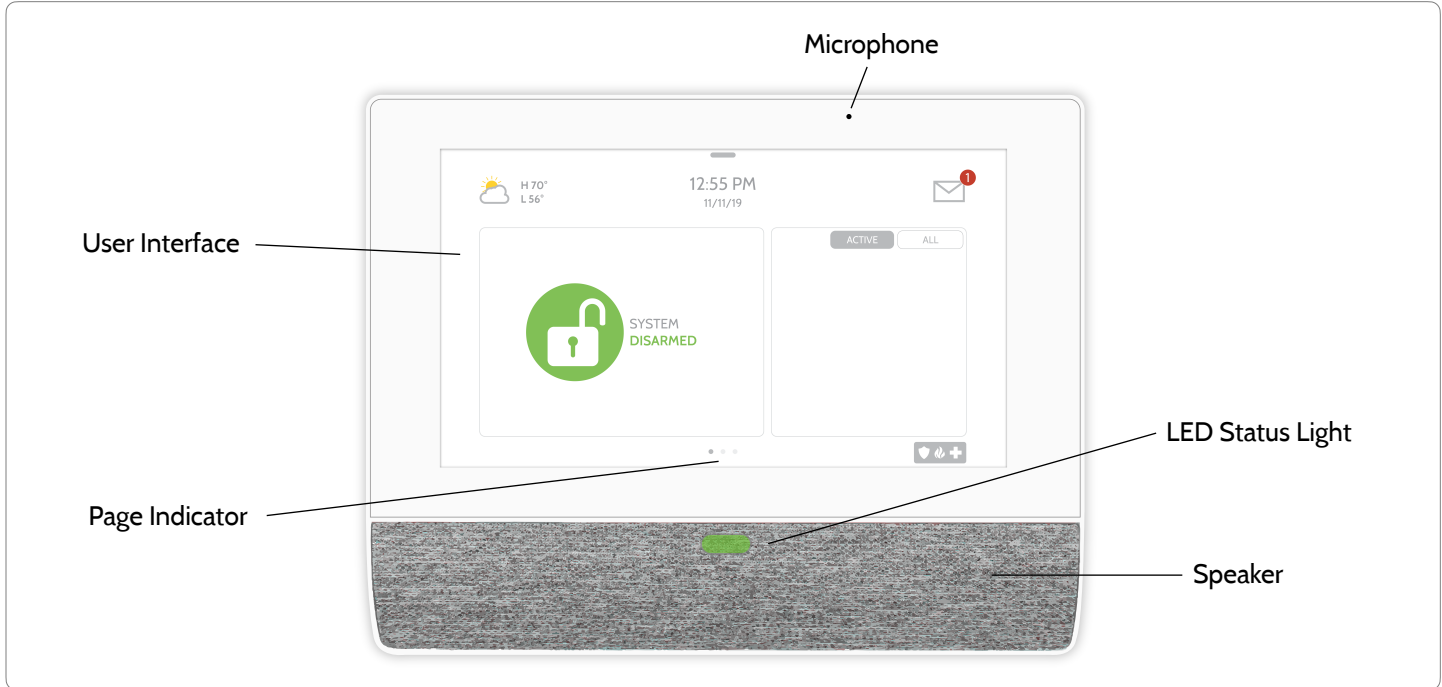

EXTERIOR BACK

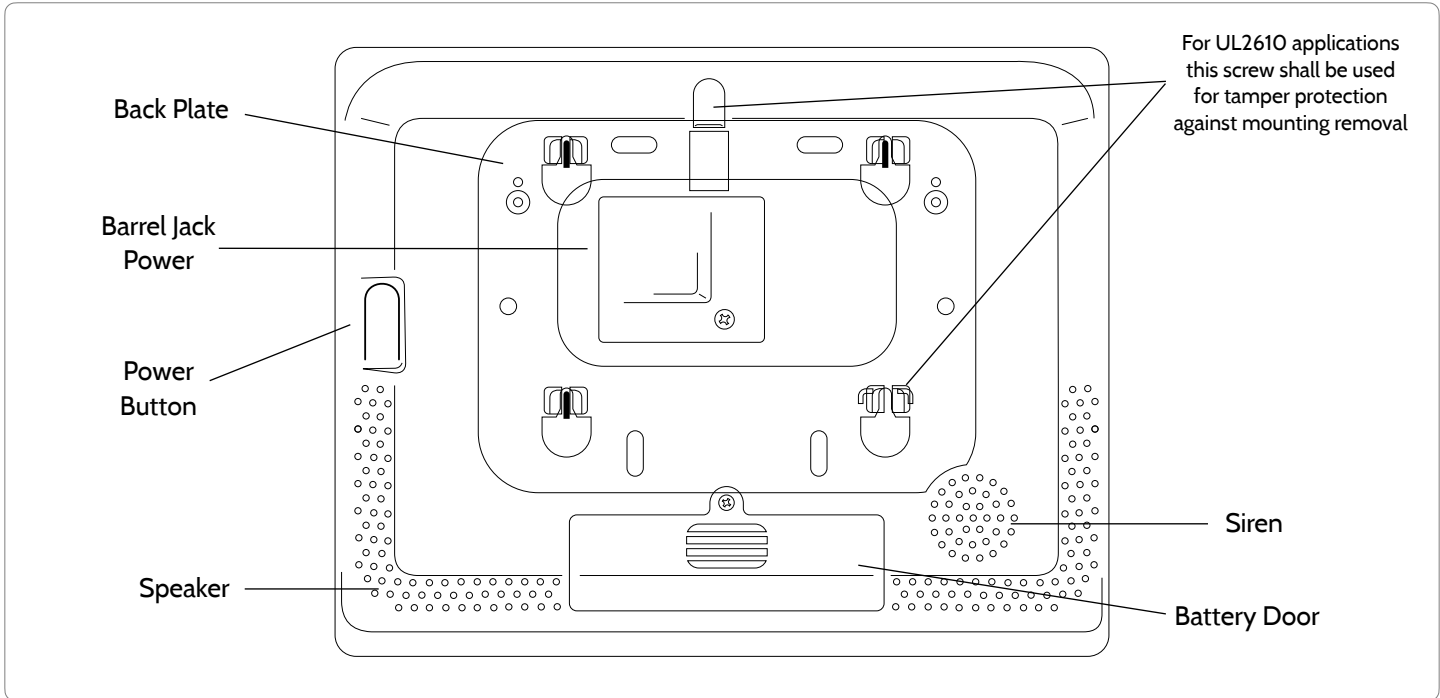


***CAUTION**

The battery should NEVER be disconnected without following proper power-down procedures. Failure to comply may result in data corruption, panel failure, and a void of the manufacturer's warranty.

INSTALLING THE IQ HUB


WALL MOUNT

Note: For UL/ULC Commercial Burg installations (UL2610/ULC-S304 Security Level II compliant) use only wall mount option. This product when installed as per these instructions does not present the risk of fire, electric shock, or injury to persons.




1. Mount the bracket to the wall using appropriate hardware ensuring it is level.


A screw shall be used in all 4 screws holes for UL2610 installations



2. Insert the barrel from the power supply into the barrel jack in the back of the panel.




3. Position the panel onto the backplate and then slide down, making sure that all 4 tabs hook into the back of the panel.




4. Secure with the top screw so that the panel cannot be removed from the backplate.


TABLE STAND (OPTIONAL)




1. Locate the optional table stand.

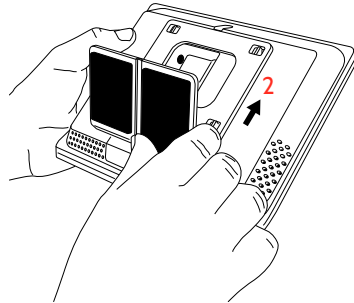

2. Position the table stand onto the back of the panel and then slide up, making sure that all 4 tabs hook into the back of the panel.

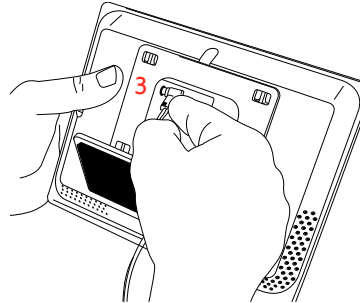

3. Insert the barrel from the power supply into the barrel jack in the back of the panel.


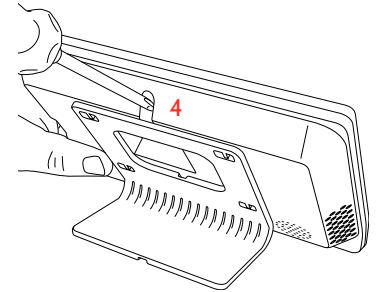


4. Secure with the top screw so that the panel cannot be removed from the table stand.



WIRING DIAGRAM

WARNING! Use 12vDC
Power Supply ONLY

12vDC IN
BARREL JACK



Input rating: 100-240vAC,
50/60Hz, 0.68A
Output rating: 12vDC, 1000mA
Model SW-120100



BARREL JACK FOR USE WITH
SUPPLIED BARREL CONNECTOR
CABLE ONLY. STRIPED WIRE IS
POSITIVE (+)



NOTES

**IMPORTANT IF USING CUSTOM LENGTH
WIRE:**

- 12vDC Transformer: Use 18AWG wire no
longer than 100ft to ensure sufficient
power is received at the panel.

* The minimum permissible wire size shall
not be smaller than 22 AWG

POWERING THE PANEL

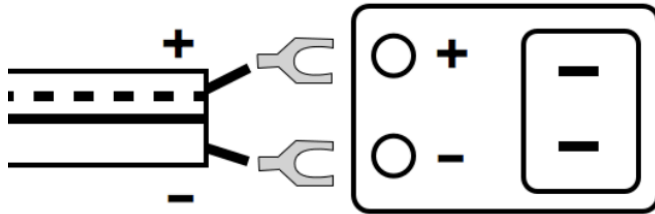

Connect power supply.

WARNING! Use a 12vDC Power Supply ONLY

If using the provided cable, the “striped” wire is (+)


Note: Power supply shall be located within same room as control unit

Press and hold the power button on the back right side of the panel for 3 seconds to power up.

USER INTERFACE

HOME SCREEN OVERVIEW

The home screen is divided into three sections. The header shows the date & time, today's weather, message center and the Settings tray. The Primary interface shows arming options and sensor status & partition select. The footer shows panic options and additional pages.

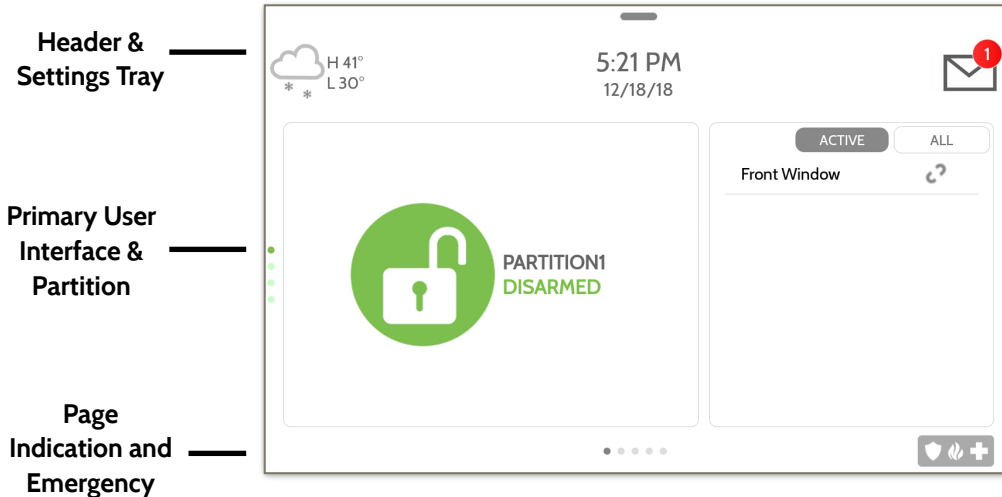

MESSAGE CENTER

The header contains the the pull down settings tray, the weather icon, time/date and a message icon in the upper right portion of the screen where you will find Security Provider messages and contact info, alerts, video tutorials and FAQ's



11:18 AM
09/15/16



CONTACT US

This is where you will find the Security Provider's Contact Information

VIDEO TUTORIALS

This is where you will find Video Tutorials to help with common questions

ALERTS/ALARMS


This is where you will find Panel Alerts/Alarms notifications

MESSAGES

This is where you will find messages from the Security Provider

SETTINGS TRAY

To access the Settings tray swipe down on the bar at the top of the screen. The Settings tray has quick access to system, battery, Wi-Fi, Bluetooth & cellular status as well as volume control, brightness, a lock screen icon and other quick settings.

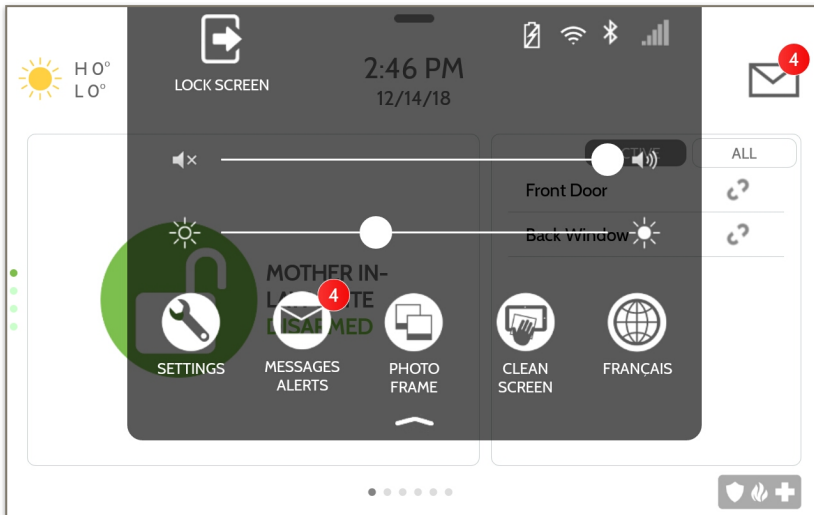

FIND IT



Swipe down for access



When partitions or screen lock are **ENABLED**, a Lock Screen icon replaces the Status icon. Touch this icon to switch between partitions.




When partitions are **DISABLED**, a Status icon resides in the upper left corner of the settings tray. Touch this icon to return to the security page.

PROGRAMMING


SCREEN LOCK

When the “Screen Lock” or “Partitions” setting are enabled, a lock screen will be presented once the panel has been woken from either a touch on the screen or pressing the wake/sleep button on the side of the panel. This prevents unauthorized access to the panel and/or one partition from accessing another as well as managing permissions to “Advanced Settings”.


4 DIGIT SCREEN LOCK

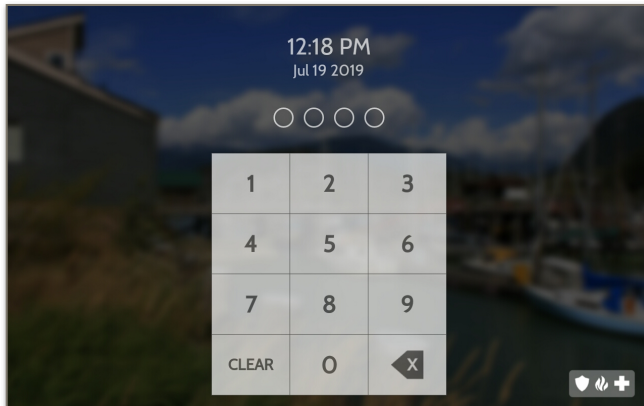

6 DIGIT SCREEN LOCK

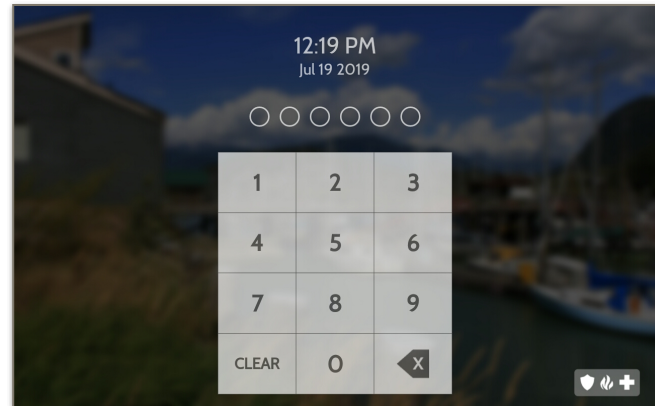


SETTINGS



The Settings page allows quick access to various simple features & settings that do not require the protection of a Dealer, Installer or Master code to be changed.

| Setting | Description |
|-----------------------|--|
| Display | Adjust brightness, font size & 12/24 hour time |
| Weather Temperature | Toggle between Fahrenheit and Celsius |
| Status | View the "Current Status" of security sensors: Zone #, Name, Status (Open, Close, Active, Idle, Tamper, Failure), Battery and sensor History. Also view "Alarms" and "History" for security sensors globally |
| Z-Wave™ Device Status | View the "Current Status" of Z-Wave devices: Name, Type, Status (Normal, Failure), and Battery. Also view "Alerts" and "History" for Z-Wave globally |
| Other Z-Wave Devices | Shows Z-Wave devices that are learned into the panel but that are not part of the main user interface (Lights, Locks, Thermostats & Garage Doors) |


FIND IT

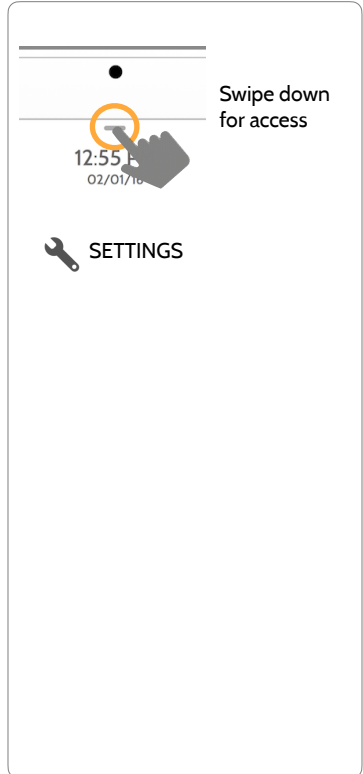

SETTINGS


| Setting | Description |
|------------------------|---|
| EU Events | Display events as required for EN Grade 2. NOTE: This icon will only appear when the "En Grade 2" setting is Enabled. |
| Automation | <p>Add, Edit or manage local lighting automation rules. These rules are separate from any cloud based rules that may be set through Alarm.com. Examples of possible rules are as follows:</p> <ul style="list-style-type: none"> - Night: Turns light on at 7pm and off at 6am - Evening: Turns light on at 7pm and off at 11pm - Front Door: Turns light on for 15mins when Front Door opens between 5pm and 7am (must have a sensor with the default quick name "Front Door" added in the panel) - Doorbell: Turns light on between 5pm and 7am for 15 mins when Doorbell is activated (must have a sensor with the default quick name "Doorbell" added in the panel) |
| Activity Monitor | <p>Activity Monitor allows access to disarm sensors that are programmed as 24 hours zones, such as Sensor Groups 8, 9 & 25. A valid Master, User or Guest code is required to control 24 hour activity sensors. 2 options are provided:</p> <ul style="list-style-type: none"> - Quick Access: 300 second temporary access - Deactivate: Disarms 24 hour sensors until they are re-activated manually |
| License | Golsys End User License Agreement |
| Advanced Settings | Access advanced settings & programming. A valid Dealer (default 2222), Installer (default 1111) or Master Code (default 1234) is required |
| Smart Energy Optimizer | Shift energy usage to off-peak hours (thermostats) and reduce energy usage during on-peak hours |

ADVANCED SETTINGS




To access the Advanced Settings menu pull down the Settings tray at the top of the screen, select “Settings” and then “Advanced Settings”. Enter your dealer, installer or master code. The code used to enter Advanced Settings determines the level of access. When using partitions the code entered at the screen lock determines the access level for Advanced Settings.


INSTALLER MENU (1111)

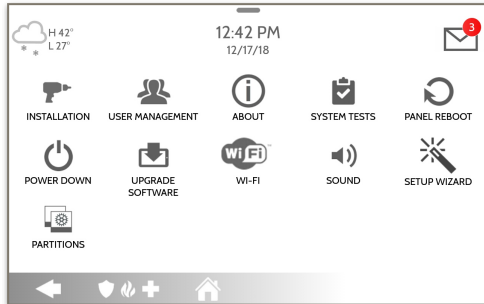

DEALER MENU (2222)

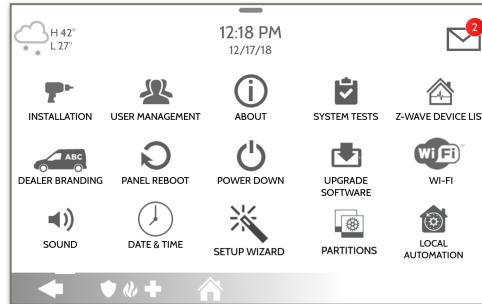

FIND IT

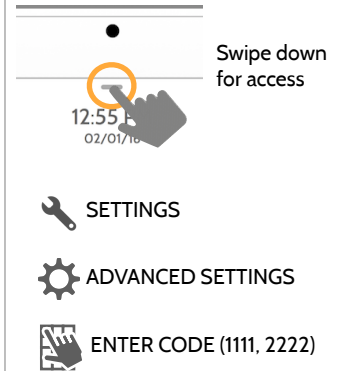

* The “Partitions” icon will only appear if Partitions are enabled under Installer/Dealer Settings

SETUP WIZARD



Setup Wizard

The “Easy Install Wizard” is an onscreen, step-by-step programming tool that makes the already fast and intuitive installation process even easier, ensuring every install is consistent and follows best practices.




Launch Wizard

Selecting Launch Wizard will initiate the Easy Setup Wizard based on the page configuration chosen.




Wizard Settings

Choose which pages you want to be shown during the Wizard walkthrough. Select Advanced or Simple sensor setup.

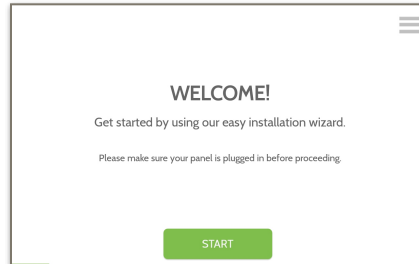

FIND IT



Swipe down
for access



SETTINGS



ADVANCED SETTINGS



ENTER CODE (1111, 2222)



SETUP WIZARD

LAUNCH WIZARD



Launch Wizard

Selecting Launch Wizard will initiate the Easy Setup Wizard based on the page configuration chosen in Wizard Settings. Available pages are: Welcome, Network, System Check, Security, Sensor Test, Z-Wave, Bluetooth, IQ Remote, Users, Dealer & Update and more.

The screenshots show the following steps:

- WELCOME!**: "Get started by using our easy installation wizard. Please make sure your panel is plugged in before proceeding." A green **START** button is at the bottom.
- CONNECTED SUCCESSFULLY**: Shows a list of connected devices: Golys2.4 (CONNECTED), Golys, ALARM (71-93.3A), and IQPanel. A **RESET** button is next to Golys2.4. A **NEXT** arrow is at the bottom right.
- CHECKING SYSTEM...**: "Activating cellular radio. Please wait..." and "Your panel connects to the cloud using cellular technology. Please wait while we connect to your closest cellular tower..."
- CHECK FOR UPDATES?**: "Your system uses your Internet connection to check for software updates." A green **START** button and a **SKIP** arrow are at the bottom.
- SEARCHING FOR SENSORS...**: "Open and close your sensor or open the case to trigger the device, or try pairing using the QRcode scanner." A **SCAN QR CODE** button, a **VIEW SENSOR LIST** button, and a **NEXT** arrow are at the bottom.
- SMARTHOME & LIFESTYLE**: "Now let's install Z-Wave devices." A **BACK** arrow, a green **START** button, a **VIEW DEVICE LIST** button, and a **SKIP** arrow are at the bottom.

FIND IT

Swipe down for access

12:55
02/01/16

- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- SETUP WIZARD
- LAUNCH WIZARD**

WIZARD SETTINGS




Wizard Settings

Choose which pages you want to be shown during the Wizard walkthrough.
Select Advanced or Simple sensor setup

| Setting | Default | Description |
|------------------------------|----------|---|
| Update | Enabled | Show the option to check for software updates in the Setup Wizard |
| Security | Enabled | Show the option to add and edit security sensors in the Setup Wizard |
| Security Sensor Setup Format | Advanced | Determines whether the Security page of the Setup Wizard shows Advanced Sensor pairing (PRO) or Simple Sensor pairing (DIY) |
| Z-Wave | Enabled | Show the option to include and edit Z-Wave devices in the Setup Wizard |
| Bluetooth | Enabled | Show the option to pair Bluetooth devices in the Setup Wizard |

FIND IT

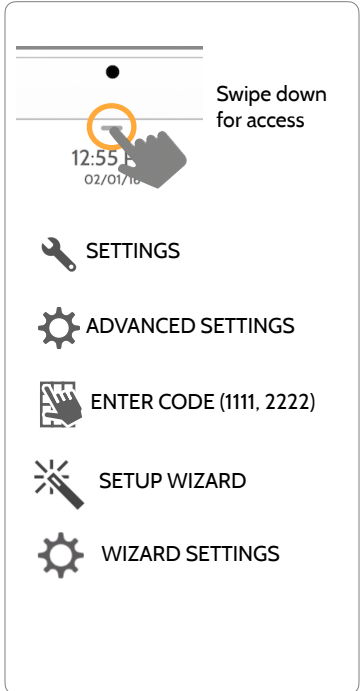


Swipe down for access

- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- SETUP WIZARD
- WIZARD SETTINGS

WIZARD SETTINGS


| Setting | Default | Description |
|---------------------|---------|---|
| Users | Enabled | Show the option to add users in the Setup Wizard |
| Dealer | Enabled | Show the option to add and edit Dealer Contact Info in the Setup Wizard |
| IQ Remote | Enabled | Show the option to pair IQ Remotes in the Setup Wizard |
| Sensor Signal Test | Enabled | Activate the sensor test as part of the Setup Wizard |
| Download Mobile App | Enabled | Show the option to scan a QR code and download the Alarm.com app |

FIND IT

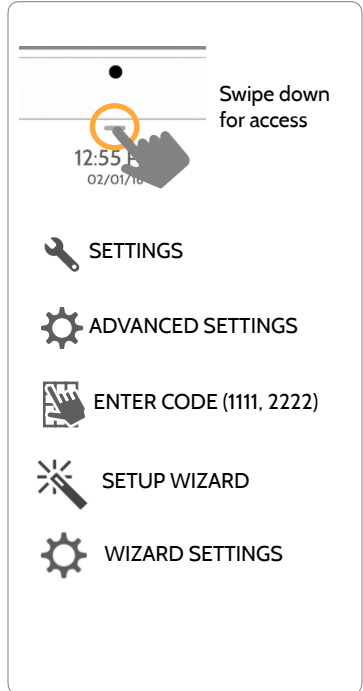


INSTALLATION

If Dealer Contact info is not previously filled out or pushed from Alarm.com, a pop up is generated when accessing the “Installation” icon, requiring that dealer contact information to be entered. This information is used to populate the “Contact Us” tab in the Message Center. **NOTE:** Company Name and Company Phone Number are required and must be filled out to continue with panel programming.

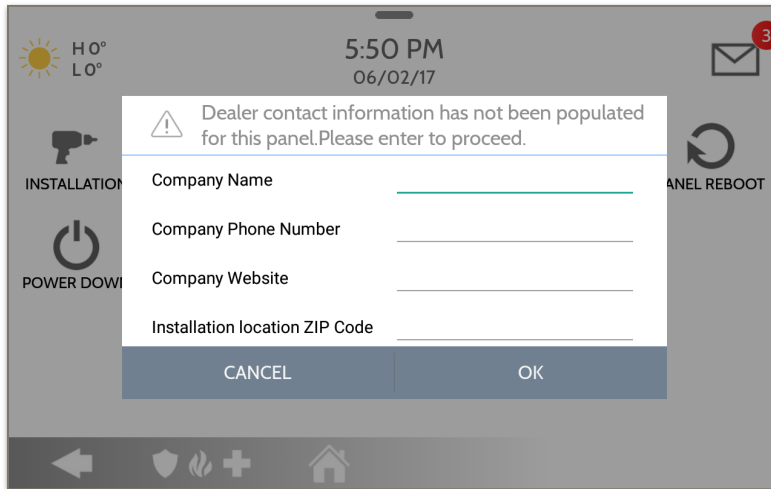


The screenshot shows a mobile app interface with a pop-up dialog. The background is dimmed, showing a weather widget (H 0°, L 0°), a clock (5:50 PM, 06/02/17), and a message center icon with a red '3' notification. The pop-up dialog has a warning icon and the text: "Dealer contact information has not been populated for this panel. Please enter to proceed." Below this text are four input fields: "Company Name", "Company Phone Number", "Company Website", and "Installation location ZIP Code". At the bottom of the dialog are "CANCEL" and "OK" buttons. The background interface includes an "INSTALLATION" icon (wrench and screwdriver), a "POWER DOWN" icon (power button), and a "PANEL REBOOT" icon (refresh arrow).

FIND IT

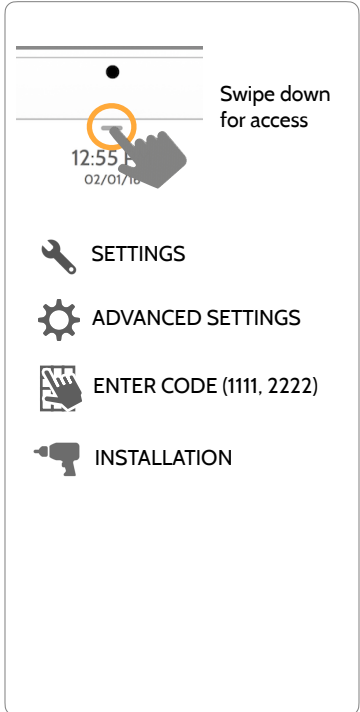


The diagram illustrates the path to the Installation menu. It starts with a home screen showing a clock (12:55) and date (02/01/16). A hand icon is shown swiping down from the top of the screen. Below the home screen, a vertical list of menu items is shown: "SETTINGS" (wrench icon), "ADVANCED SETTINGS" (gear icon), "ENTER CODE (1111, 2222)" (hand with code icon), and "INSTALLATION" (wrench and screwdriver icon).

INSTALLATION

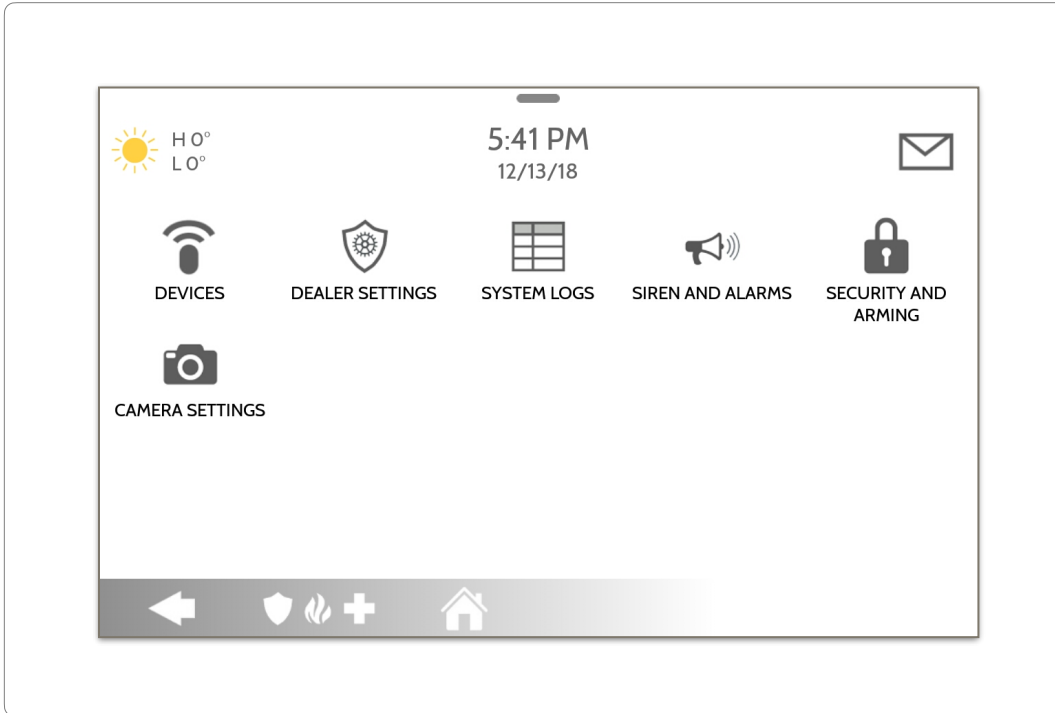

FIND IT

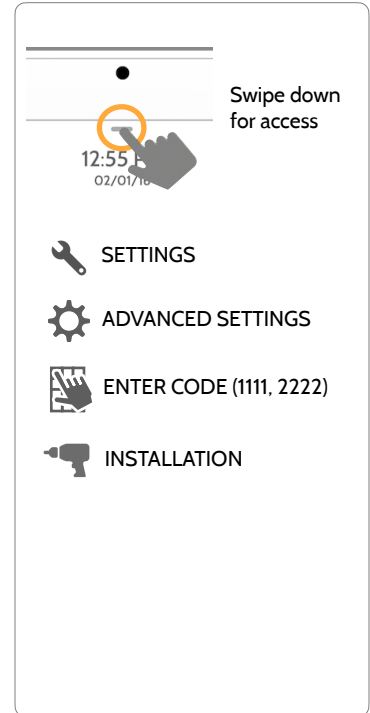

INSTALLER/DEALER SETTINGS




Installer/Dealer Settings

Change panel settings like supervisory times, power and cell loss timeout and SIA settings.

| Setting | Default | Description |
|--|----------|--|
| Account Number | blank | Security provider account number (up to 10 characters) |
| Power Management | Enabled | An energy-saving function when running on battery power only |
| SIA Power Restoration | Disabled | Turn on or off sensor hold for 60 seconds during power restore |
| ULC Commercial Power Restoration | Disabled | When enabled, ignore all sensor activity for 120 seconds after power restoration |
| Loss of Supervisory Signals for Emergency Sensors | 4 | Select the length in hours (4, 12, 24) before reporting a loss of supervision on life safety devices. NOTE: For UL/cUL Resi Fire and UL Commercial Burg (UL2610) the wireless supervision window for Emergency sensors (Smoke, Heat & CO Detectors) shall be set to 4h |
| Loss of Supervisory Signals for PowerG Emergency Sensors | 4 | Select the length of time (20, 30 min, 1, 2, 4, 12, 18 hours) before reporting a loss of supervision on PowerG life safety devices. NOTE: For UL/cUL Resi Fire and UL Commercial Burg (UL2610) the wireless supervision window for Emergency sensors (Smoke, Heat & CO Detectors) shall be set to 4h |

FIND IT



SETTINGS



ADVANCED SETTINGS



ENTER CODE (1111, 2222)



INSTALLATION



INSTALLER/DEALER SETTINGS

*** Additional options available only through the Dealer Code.**

INSTALLER/DEALER SETTINGS

| Setting | Default | Description |
|--|------------|--|
| Loss of Supervisory Signals for Z-Wave | 4 | Select the length in hours (4, 24) before reporting a loss of supervision on Z-Wave Sirens. |
| Loss of Supervisory Signals for Non Emergency Sensors | 24 | Select the length in hours (4, 12, 24) before reporting a loss of supervision on security devices. NOTE: For UL/cUL Resi Fire and UL Commercial Burg (UL2610) the wireless supervision window for Non-Emergency sensors (all intrusion sensors) shall be set to 4h |
| Loss of Supervisory Signals for PowerG Non Emergency Sensors | 24 | Select the length of time (20, 30 min, 1, 2, 4, 12, 18 hours) before reporting a loss of supervision on PowerG security devices. NOTE: For UL/cUL Resi Fire and UL Commercial Burg (UL2610) the wireless supervision window for Non-Emergency sensors (all intrusion sensors) shall be set to 4h |
| Loss of Cell Signal Timeout | 30 | Select the length in minutes (10-120) before reporting a loss in cellular signal. NOTE: For UL Commercial Burg (UL2610) the cell supervision is hardcoded to 200s |
| Communication Test | Monthly | Choose Never, Daily, Weekly or Monthly when enabling the communication test. |
| Communication Test Start Time | Randomized | Select the time of day that the panel will send its Communication Test. If no time is selected the time will automatically be randomized. |

INSTALLER/DEALER SETTINGS

| Setting | Default | Description |
|--|-----------------|---|
| <p>SIA Limits</p> <p>NOTE: For UL resi burg set entry delay to 45 sec and exit delay to max 120 sec. For UL Commercial Burg (UL2610) maximum entry and exit delay should not exceed 60 sec.</p> <p>NOTE: For ULC Security Level I (resi burg) set entry delay to 180 sec. For ULC Security Level II (commercial burg) set entry delay to 60 sec and exit delay to 45 sec max.</p> | <p>Enabled</p> | <p>When enabled, the range for entry and exit delays is as follows: -Entry delay: 30-240 seconds, Exit Delay: 45-254 seconds When disabled, the range for entry and exit delays are as follows: -Entry delay: 5 to 240 seconds, Exit delay: 5 to 254 seconds</p> <p>When enabled the range for Dialer Delay is: 15 to 45 seconds When disabled the range for Dialer Delay is: 0 to 254 seconds</p> |
| <p>EN Grade 2</p> | <p>Disabled</p> | <p>The setting enables EN Grade 2 compliance on the Panel. When Enabled, the following behaviors and/or settings are changed automatically:</p> <ul style="list-style-type: none"> - Entry Procedure (EU) - follows entry procedures and alarm transmission delays specified by EN 50131 - Disables the "Auto Bypass" setting so that the Panel will protest arming when sensor and panel trouble conditions are present (i.e. Open, Tamper, Low Battery, etc) - Trouble condition alerts can not be acknowledged until the condition is resolved - Trouble beeps are expanded to include fault indications required by EN 50131 - "Screen Lock" setting is enabled automatically. Screen will lock 30 seconds after Disarming - A new icon called "EU Events" is added to the "Settings" page which records mandatory history events specified by EN 50131. - "Loss of Supervisory Signals for PowerG Non-Emergency Sensors" is set to 2 hours by default. - "LED Indicator" setting is Disabled automatically. - "Partitions" setting is not available. - "Dealer or Installer Access Requires User Permission" setting is Enabled automatically. |

INSTALLER/DEALER SETTINGS

| Setting | Default | Description |
|------------------------------------|-----------------|--|
| EU Event Swinger Shutdown Count | 3 | Determines the number of times a particular event will record to "EU Events" log before shutdown. The count (3-10) will reset after and arm or disarm event. NOTE: This setting is greyed out and not selectable unless EN Grade 2 is Enabled. |
| Favorite Languages | English/Español | Set the Panel's language toggle to your favorite 2 languages. Choose from English (United States), Français (Canada), Español (Estados Unidos), Italiano (Italia), Nederlands (Nederland), Norsk bokmål (Norge), Svenska (Sverige) and Íslenska (Ísland), Deutsch (Deutschland), Magyar, (Magyarország), Dansk (Danmark), Română (România), Portuguesa (Portugal), Polskie (Polska), Suomalainen (Suomi), Français (France), Español (España). |
| LED Indicator | Enabled | Manually Enable/Disable the LED Status Light on the panel. NOTE: This setting will automatically be set to Disabled when EN Grade 2 is Enabled. |
| 6 Digit User Code | Disabled | This is a global setting for all codes used on the panel and changes the input from 4 digits to 6 digits. When enabled, a "00" will be appended to all existing 4 digit codes |
| Commercial Sensor and Device Names | Disabled | Enabling this features changes the sensor name vocabulary from residential naming to commercial naming. |

INSTALLER/DEALER SETTINGS

| Setting | Default | Description |
|--|----------|---|
| Wellness Support | Disabled | When Enabled, Auxiliary Pendants learned into Group 6 behave like a traditional PERS pendant. The system generates a signal to Alarm.com but does not generate a loud local alarm that needs to be disarmed between button presses. NOTE: This feature can not be enabled if Partitions are enabled. |
| Wi-Fi Warning Messages | Enabled | When enabled the panel will display a pop up when entering “Settings” letting the end user know that Wi-Fi has been disconnected. |
| Partitions | Disabled | Create up to 4 partitions by enabling this feature. NOTE: This setting will automatically be greyed out and unavailable when EN Grade 2 is Enabled. |
| PowerG Camera Alarm Image Upload Count | 10 | Determines the number of Images to be uploaded by any PowerG PIR CAM when triggered during an Alarm. Choose between 10 and 1. |
| Security Page | Enabled | Choose whether or not you want the “Security Page” to appear as part of primary user interface on the panel. NOTE: Before the Security Page can be disabled, you must enable the “Wellness Page” or the “Home Control Page”. This feature can not be disabled if Partitions are enabled. |
| Wellness Page | Disabled | Choose whether or not you want the “Wellness Page” to appear as part of primary user interface on the panel. NOTE: This feature can not be enabled if Partitions are enabled. |

INSTALLER/DEALER SETTINGS

| Setting | Default | Description |
|--|----------|--|
| Check-in/Check-Out | Disabled | Choose whether or not you want a “Check-in” and “Check-out” button to appear as part of the Wellness Page UI. This feature allows a nurse to check in/out and have their picture taken by the panel as record of their visit. NOTE: The Wellness Page must be enabled in order for this feature to also be enabled. |
| Home Control Page | Disabled | Choose whether or not you want the “Home Control Page” to appear as part of primary user interface on the panel. NOTE: Before the Home Control Page can be enabled there must be at least two (2) different “types” of automation devices added to the panel (Lights, Locks or Thermostats). This feature can not be enabled if Partitions are enabled. |
| Door Lock Page | Enabled | Choose whether or not you want the “Door Lock Page” to appear as part of primary user interface on the panel anytime a Door Lock is added as a device. |
| Thermostat Page | Enabled | Choose whether or not you want the “Thermostat Page” to appear as part of primary user interface on the panel anytime a Thermostat is added as a device. |
| Scenes Support | Disabled | When enabled, a new icon will appear in the panel UI on left hand footer enabling the use of Scenes that have been created on Alarm.com. NOTE: This feature can not be enabled if Partitions are enabled. |
| Stream Live Video Cameras to IQ Remote | Disabled | This setting allows a user to view cameras from the IQ Remote. When enabled, Cameras that are streaming to the primary panel will also stream to the IQ Remote. |

INSTALLER/DEALER SETTINGS

| Setting | Default | Description |
|--|----------|--|
| PowerG RF Jam Detection | Disabled | When enabled the system can detect when an unusual amount of RF signals are being transmitted in the PowerG spectrum leading to a potential panel malfunction. This event reports to the central station when enabled. Choose from Disabled, UL20/20 or En 30/60. |
| Jam Detection | Disabled | When enabled the system can detect when an unusual amount of RF signals are being transmitted on the frequency of the legacy daughter card installed in the panel (319.5MHz, 345MHz or 433MHz) leading to a potential panel malfunction. This event reports to the central station when enabled. |
| Jam Detection Local Alarm NOTE: Not evaluated by UL/cUL | Disabled | When enabled the system will sound a local alarm. "Jam Detection" must be active for this to function properly |
| SRF Jam Sensitivity Level | Normal | Choose between HIGH and NORMAL sensitivity levels |
| Allow Master Code to Access Security Sensors | Disabled | Allow the Master Code to access to the Security Sensor icon, including Auto Learn Sensor, Add Sensor, Edit Sensor, Delete Sensor, Sensor Status & Sensor Group |
| Open/Close Reports Allowed For Auto Learn | Enabled | Rather than sending a tamper to auto learn a sensor, enabling this will allow an open/close of the sensor to trigger auto learn |

INSTALLER/DEALER SETTINGS

| Setting | Default | Description |
|--------------------------------|----------|---|
| Delete All Sensors | | Deletes all security sensors and Bluetooth devices programmed in the panel |
| Delete All Z-Wave Devices | | Performs a factory reset on the Z-Wave controller. Does not factory reset previously included devices. |
| Master Reset* | | Restores panel to factory settings and erases all content |
| Data Recycle | | This feature erases all User data previously stored. (Wi-Fi SSID & Password, User Codes, Images, Custom PhotoFrame Images, Message Center & Panel Event History). |
| IQ Remote Reset Authentication | Disabled | If Enabled, the IQ Remote will require authentication (Dealer or Installer Code) to master reset it. |


SYSTEM LOGS



System logs allow the panel to send non-customer identifying information to the server for troubleshooting and bug identification.

| Setting | Default | Description |
|---------------------------|-----------------------------|--|
| Upload logs to the server | <i>Requires manual push</i> | Tell the panel to begin uploading a history of it's activity to the server. This information is used to troubleshoot bugs and diagnose panel problems. The panel will upload any logs saved in it's memory |
| Auto Upload Logs | Disabled | Automatically upload the system's log to the servers every 24 hours |
| Log Level | Debug | <p>Tell the panel how much information to record in log files.</p> <p>No log output: No information recorded Fatal: Record fatal or severely problematic information only Error: Record all errors and fatal issues Warn: Record warnings, errors, and fatal issues Info: Record all generic, non-customer related information Debug: Record diagnostic messages, Info, Warnings, Errors, and Fatal issues Verbose: Record all non-customer identifying information</p> |

FIND IT

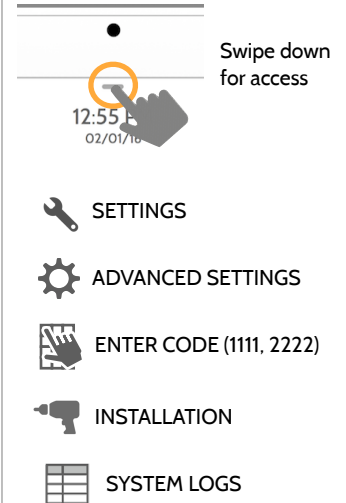

SIREN AND ALARMS




Siren and Alarms

Change siren and alarm settings for certain types of alarm events.

| Setting | Default | Description |
|--------------------|---------------|---|
| Panel Sirens | All Sirens On | <p>All Sirens Off: This will disable the siren for all alarm types including any paired or hardwired external sirens. After 30 mins the fire siren will be re enabled.</p> <p>All Sirens On: This is the default setting which enables the siren for all alarms</p> <p>Installer/Test Mode: This disables the siren for all alarm types including any paired or hardwired external sirens for 30 mins then all sirens are re-enabled</p> |
| Siren Annunciation | Disabled | <p>Panel siren pauses periodically to announce which locations have triggered the alarm.</p> <p>NOTE: for UL/cUL this feature is not allowed for Fire, CO, Burglar Alarm</p> |
| Fire Verification | Disabled | <p>When enabled, panel requires two fire events from smoke detector (one detector twice or two detectors once each)</p> <p>NOTE: Not allowed on UL/cUL installations</p> |

FIND IT



SETTINGS



ADVANCED SETTINGS



ENTER CODE (1111, 2222)



INSTALLATION



SIREN AND ALARMS

SIREN AND ALARMS

| Setting | Default | Description |
|--------------------------------------|----------|--|
| Burglary Alarm Confirmation | Disabled | When enabled, a confirmed alarm requires two sequential burglary alarms within the Burglary Alarm Confirmation Timer window. NOTE: This setting is greyed out and unavailable unless EN Grade 2 is enabled. |
| Burglary Alarm Confirmation Timer | 30 | Timer used for Burglary Alarm Confirmation. NOTE: This setting is greyed out and unavailable unless EN Grade 2 is enabled. |
| Severe Weather Siren Warning | Enabled | When enabled, siren will sound when the panel receives a severe weather alert. When disabled, panel will use severe weather chime |
| Dialer Delay | :30 | Amount of time (in seconds) before panel will attempt call to central station after an alarm event is triggered When SIA Limits enabled: :15 to :45 seconds When SIA Limits disabled: :0 to :254 seconds |
| Siren Timeout | 4 min | Determine how long before siren stops sounding during an alarm event (4 minutes to 15 minutes). NOTE: For UL/cUL residential fire/burg applications the minimum bell timeout shall be set to 5 min. For UL Commercial Burglary installations, minimum bell time out shall be set to 15 minutes. |
| Water/Freeze Siren/Temperature Siren | Disabled | When enabled, siren will sound when a water or freeze detector is triggered. When disabled, the panel emits a "water" tone |

SIREN AND ALARMS

| Setting | Default | Description |
|---|------------------|---|
| PowerG Smoke Detector Siren | Fire Alarms Only | When set to "Fire Alarms Only", PowerG Smoke Detectors that are learned into the system will only sound during fire alarm events. When set to "All Alarms", PowerG Smoke Detectors will act as additional wireless sirens and will sound during all alarm events. |
| Police Panic | Enabled | Allows Police Panic to be enabled or disabled. |
| Fire Panic | Enabled | Allows Fire Panic to be enabled or disabled. |
| Auxiliary Panic | Enabled | Allows Auxiliary Panic to be enabled or disabled. |
| Audible Siren for Wireless Supervisory Failures | Disabled | When this setting is enabled and the system is armed, supervisory failures for non-emergency sensors are treated the same as a tamper and cause an alarm to be generated. |
| Allow Master Code To Access Siren and Alarms | Disabled | Allow the master code to access these features and settings. NOTE: not allowed for UL/cUL. |

SECURITY AND ARMING




Security and Arming

Change arming settings, entry and exit delays, enable Duress Authentication and more.

| Setting | Default | Description |
|------------------------|----------|--|
| Dealer Code* | 2222 | Code to access all options |
| Installer Code | 1111 | Code to access installer options only |
| Swinger Shutdown | Enabled | Determines whether the panel allows the same sensor to trip the alarm more than once (enabled), or not (disabled) |
| Swinger Shutdown Count | 1 | Determines the number of times the same sensor is allowed to trip the alarm during the same arming period (1-6). Swinger Shutdown must be enabled in order for this setting to work |
| Panel Tamper | Enabled | This setting enables or disables the Panel Tamper switch on the back of the panel. NOTE: for UL/cUL this setting shall be Enabled |
| Screen Lock | Disabled | When enabled, a screen lock page will appear. Screen lock restricts access to the panel based on valid user codes. NOTE: This setting is required and is automatically enabled when Partitions are enabled. It is also enabled for "En Grade 2" |

FIND IT



SETTINGS



ADVANCED SETTINGS



ENTER CODE (1111, 2222)



INSTALLATION



SECURITY AND
ARMING

* Additional options available
only through the Dealer Code.

SECURITY AND ARMING

| Setting | Default | Description |
|--------------------------------|----------|--|
| Secure Arming | Disabled | Require user code for arming the panel. NOTE: this option shall be enabled for UL/cUL. |
| Refuse Arming When Battery Low | Disabled | Will not allow panel to arm if battery is low (below 8%) |
| Auto Bypass | Enabled | Toggle whether or not to bypass open or tampered sensors automatically. NOTE: Shall be disabled for UL/cUL. This setting is turned off and greyed out when the "En Grade 2" setting is enabled. |
| Final Exit Door Arming | Disabled | When enabled, if Arm Away is selected at the panel then there is no timed exit delay. Instead, the system is not fully armed until an Entry/Exit door is violated. NOTE: This setting is greyed out and unavailable unless EN Grade 2 is enabled. |
| Auto Stay | Enabled | If panel is armed "Away" but a delay door is not opened, the panel assumes you are still home and changes arming to "Stay" mode |
| Arm Stay - No Delay | Enabled | Arm stay immediately with no countdown timer |
| Auto Exit Time Extension | Enabled | Automatically extend countdown timer if delay door is opened during countdown process a second time |
| Keyfob Instant Arming | Enabled | When enabled, turns off exit delay if keyfob is used to arm the system |
| Keyfob Alarm Disarm | Disabled | When enabled this will Allow a keyfob to disarm alarm events, except panics originating from the same key fob |

SECURITY AND ARMING

| Setting | Default | Description |
|---|----------|---|
| Keyfob Disarming | Enabled | When Disabled, a Keyfob will not be able to disarm the panel |
| Engineer's Reset | Disabled | If a confirmed alarm occurs on a burglary zone, the system is locked out after disarming until a 5 digit reset code provided by the installer is entered in. |
| Allow Master Code to Access Security and Arming | Disabled | Allow the master code to access these features and settings. NOTE: this option shall be disabled for UL/cUL. This option shall be enabled for UL Commercial Burg installations. |
| Normal Entry Delay | 30 Secs | How much time users have to enter their code after opening a door (30-240secs). With SIA limits disabled the minimum time can be set to 5 secs. NOTE: For UL Commercial Burg (UL2610) maximum entry delay should not exceed 60s |
| Normal Exit Delay | 60 Secs | How much time users have to exit the location before the panel arms itself (30-254secs). With SIA limits disabled the minimum time can be set to 5 secs. Door/Window group 10 follows the "Normal Exit Delay" NOTE: For UL Commercial Burg (UL2610) maximum exit delay should not exceed 60s |
| Long Entry Delay | 100 Secs | A second separate entry delay that can be used on a sensor needing more time when tripped (45-240secs). With SIA limits disabled the minimum time can be set to 5 secs |
| Long Exit Delay | 120 Secs | A second separate exit delay that can be used on a sensor needing more time when tripped (45-254secs). With SIA limits disabled the minimum time can be set to 5 secs. Door/Window group 12 follows the "Long Exit Delay" |


Z-WAVE DEVICE LIST*

FIND IT



Z-Wave Device List


Shows device specific information for programmed Z-Wave devices.

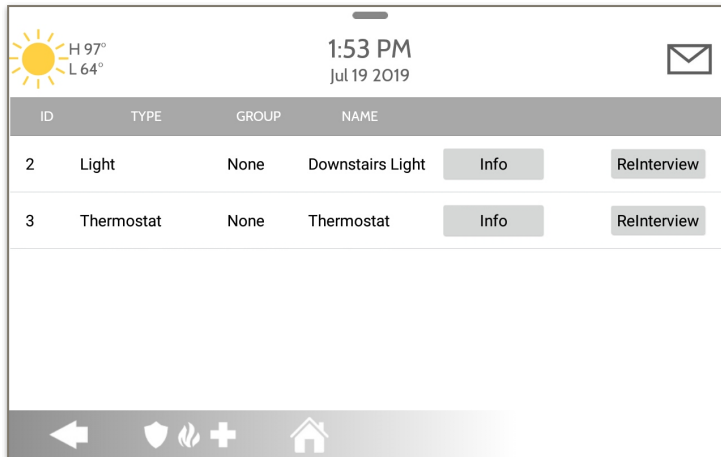

Pressing “Info” displays:

- Product Info
- Protocol Info
- Application Info
- Supported Command Classes

Pressing “Re-Interview” will resend all initial pairing commands to that device.



Swipe down for access

- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- Z-WAVE DEVICE LIST

*This page only available through the Dealer Code.

SOUND




Sound

Customize panel sounds. Enable/Disable voices, chimes, trouble beeps and more.

| Setting | Default | Description |
|-----------------------|---------|--|
| Volume | n/a | Controls the panel's voice volume, beeps and chime volume and the media volume (help videos) through individual sliders |
| Edit Chimes | n/a | Allows you to select from various chimes for each individual device |
| Voice Settings | | |
| Voices | Enabled | This is a global setting for Sensors, Panel messages, Activity Monitoring Sensors, and Z-Wave device voices and indicates whether the panel should "speak" |
| Sensors | Enabled | Turns Sensor voices on (enabled) or off (disabled) |
| Panel | Enabled | Turns Panel voices on (enabled) or off (disabled) |
| Activity Monitoring | Enabled | Turns Activity Monitoring voices on (enabled) or off (disabled) |


FIND IT

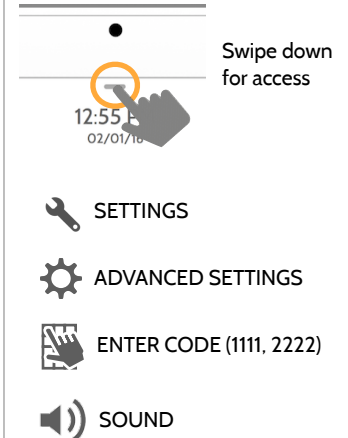

SOUND

FIND IT


| Setting | Default | Description |
|------------------------------------|---------|--|
| Z-Wave Device Voice Prompts | Enabled | Turns Z-Wave Device voices on (enabled) or off (disabled) |
| Remote Z-Wave Device Voice Prompts | Enabled | Turns voices on (enabled) or off (disabled) for Z-Wave devices being controlled remotely (via Alarm.com) |
| Chime Settings | | |
| All Chimes | Enabled | This is a global setting for Sensors, Panel messages and Activity Monitoring Sensors chimes and indicates whether the panel should emit tones or “beeps” |
| Sensor Chimes | Enabled | Turns chimes on (enabled) or off (disabled) for Sensors |
| Panel | Enabled | Turns Panel chimes on (enabled) or off (disabled) |
| Activity Sensor | Enabled | Turns Activity Sensor chimes on (enabled) or off (disabled) |

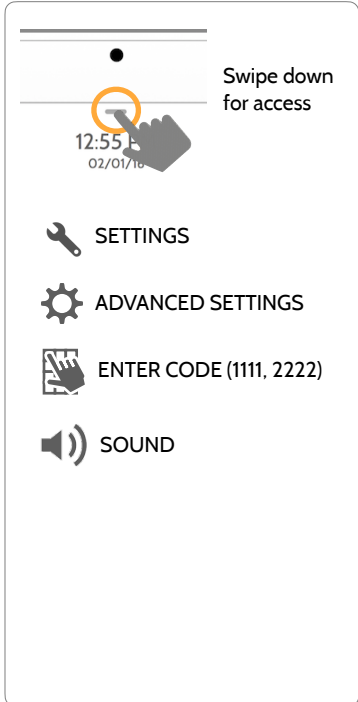

SOUND



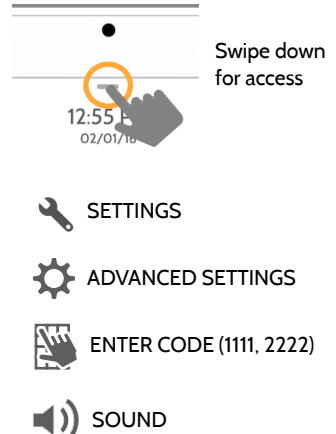

FIND IT

| Setting | Default | Description |
|---|----------|---|
| Trouble Beeps | | |
| Trouble Beeps | Disabled | Toggles all sensor and panel trouble beeps on or off. By default all trouble beeps are disabled |
| Sensor Low Battery | Disabled | Panel sounds when a sensor battery is low. Chime type and frequency are set below. By default these sounds are disabled |
| Sensor Tamper Beeps | Disabled | Panel sounds when a sensor is tampered. Chime type and frequency are set below. By default these sounds are disabled |
| Panel Tamper Beeps | Disabled | Panel sounds when tampered or opened. Chime type and frequency are set below. By default these sounds are disabled |
| Edit Trouble Beep Chimes | n/a | Select the chime type for Sensor Low Battery, Sensor Tamper, and Panel Tamper |
| Trouble Beeps Timeout | 30 | Determines the amount of time between each trouble beep. Length can be set between 3-60 mins. (default is 30 mins) |
| Fire and Life Safety Device Trouble Beeps | Disabled | Panel will sound a trouble alert if a fire safety device is tampered, failed or has a low battery (disabled by default) |



Swipe down for access


12:55
02/01/16

-  SETTINGS
-  ADVANCED SETTINGS
-  ENTER CODE (1111, 2222)
-  SOUND

SOUND

FIND IT

| Setting | Default | Description |
|------------------------------------|----------|--|
| Partition Sounds* | | |
| Global Fire Siren | Enabled | When Partitions are enabled this setting determines whether Fire alarms sound in all partitions (enabled) or in only the partition they are assigned to (disabled) |
| Global Intrusion Sounds and Sirens | Disabled | Intrusion alarms and entry/exit sounds will sound in all partitions |
| Global Auxiliary Sirens | Disabled | Auxiliary alarm will sound in all partitions |
| Global Chimes and Voices | Disabled | Chimes and voices will play in all partitions |
| All Sounds in Partition 1 | Disabled | Sounds and alarms from all other partitions will sound in partition 1 |
| Other Sounds | | |
| Touch Sounds | Enabled | This setting determines whether a touch sound is played when touching the screen (enabled) or not (disabled) |
| Exit Beeps | Enabled | Play exit beeps for the Quick Exit and Quick Access feature on the panel (enabled) or not (disabled) |

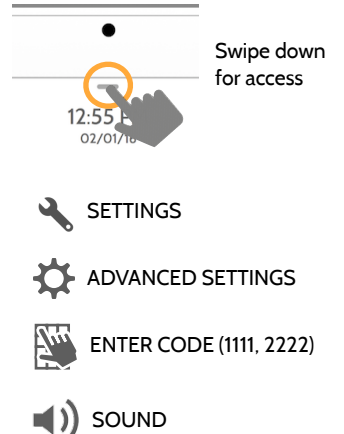

Swipe down for access

12:55
02/01/16

- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- SOUND


* Additional settings available only when Partitions are enabled.

PARTITIONS*




Partitions

Edit the default name of a partition and view a list of users and sensors that are currently assigned to a given partition. Partitions 1, 2, 3 & 4 only appear when Partitions are enabled and when at least one sensor is learned into them.




Overview:

View the number of partitions set up on a system. There must be at least one sensor assigned to a partition before it can be viewed/edited



Info:


View Users and Sensors associated with each partition



Edit:

Rename a partition that suits its location or area being protected

FIND IT



SETTINGS



ADVANCED SETTINGS



ENTER CODE (1111, 2222)



PARTITIONS


* The "Partitions" icon will only appear if Partitions are enabled under Installer/Dealer Settings

LOCAL AUTOMATION*



Local Automation


This hardcoded scene is designed for Panels installed in new construction properties that do not yet have an Alarm.com account activated, but that need to manage Z-Wave devices locally in a “vacant home mode”.

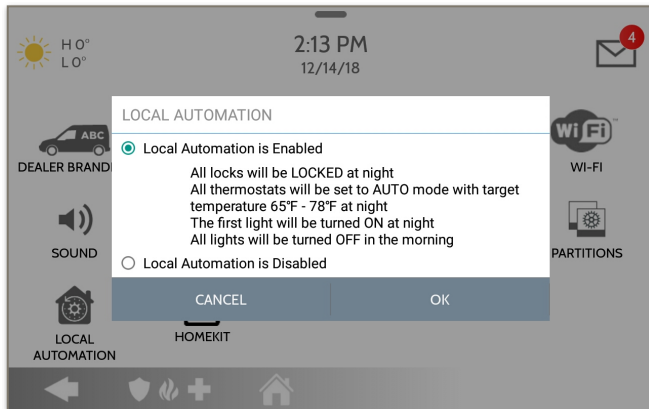

Runs Daily:

- Automatically LOCK all locks at night (8pm)
- Set all thermostats to AUTO mode with a target temperature of 65°F - 78°F
- Turn Light 1 ON at night (8pm) and then turn all lights OFF in the morning (6am)

FIND IT



SETTINGS



ADVANCED SETTINGS




ENTER CODE (1111, 2222)




LOCAL AUTOMATION

*This page only available through the Dealer Code.

DEVICES

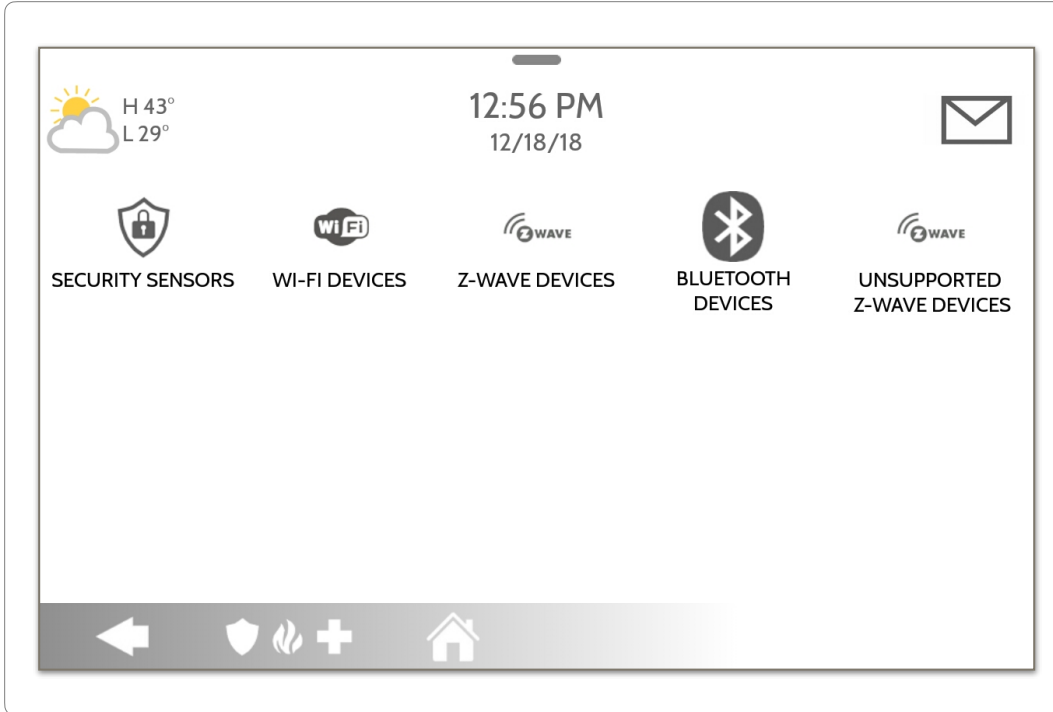

FIND IT

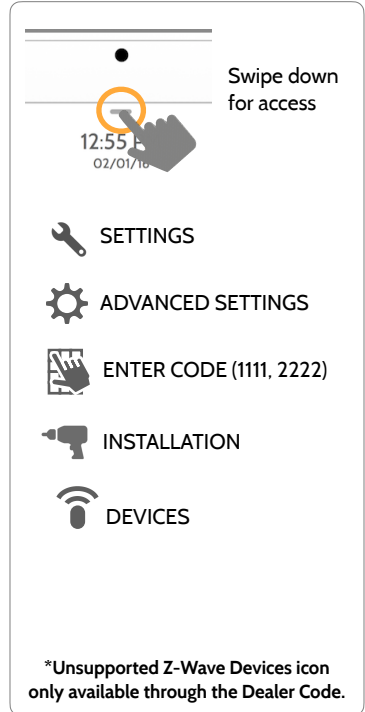

SECURITY SENSORS

SECURITY SENSORS



Security Sensors

Add, edit or delete up to 128 security RF or life safety devices.



Auto Learn Sensor

Pair sensors quickly by tripping or tampering and then editing the information



Add Sensor

Pair sensors manually by typing in a DL code or Serial number



Edit Sensor

Make changes to existing sensors



Delete Sensor

Remove a sensor



Sensor Status

Monitor sensor status in realtime



Sensor Group

Quick reference to all sensor groups and their actions



Remove All PowerG Sensors


Delete all PowerG sensors from the Panel





PowerG Output Rules

Configure PGMs when using the PGxWLSHW8

FIND IT

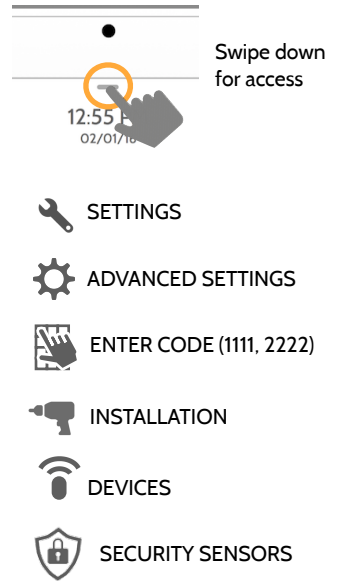

AUTO LEARN SENSOR

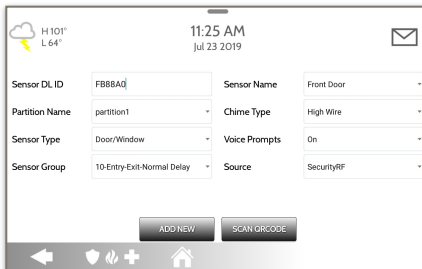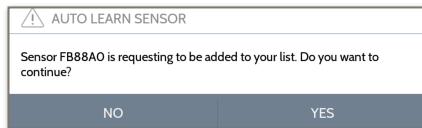

1. Select “Auto Learn Sensor”
2. For PowerG contacts, hold the “enroll” button until the yellow LED flashes.
3. Panel will chime and display the sensor’s DL code. Select OK to confirm.
4. Configure **Partition Name**, **Sensor Type**, **Sensor Group**, **Sensor Name**, **Chime Type** and **Voice Prompts** with the smart filtering drop down lists.
5. Select “Add New” to complete and move to the next sensor.

NOTE: When enrolling an “S-Line” sensor, the panel will auto detect that it’s encrypted and change the “Source” field to S-Line.

When enrolling a sensor of a different frequency (345MHz, 433MHz, PowerG) the Source field will change to accommodate the incoming signal type.

When a sensor with the frequency 345 is used, you will be given an additional field to specify the Loop #.

ADD SENSOR



| | |
|----------------|---|
| Sensor DL ID | <input type="text" value="Enter Sensor DL ID"/> |
| Partition Name | <input type="text" value="partition1"/> |
| Sensor Type | <input type="text" value="Door/Window"/> |
| Sensor Group | <input type="text" value="10-Entry-Exit-Normal Delay"/> |
| Sensor Name | <input type="text" value="Front Door"/> |
| Chime Type | <input type="text" value="High Wire"/> |
| Voice Prompts | <input type="text" value="On"/> |
| Source | <input type="text" value="SecurityRF-319"/> |


ADD NEW

SCAN QR CODE

1. Select “**Add Sensor**” (NOTE: These same fields can be edited later from the “Edit Sensor” app)
2. Tap the field marked “**Sensor DL ID**” to open the keyboard. Enter the DL code or Sensor ID on the back of the device and touch “Done”
3. Use the drop down menu to select which **Partition** you would like the sensor to be added to (if enabled)
4. Choose **Sensor Type** from list
5. Indicate **Sensor Group** from list
6. Choose **Sensor Name** from the list or create a “Custom Name” using the built in keyboard with Custom Text to Speech.
7. Choose **Chime Type** from list
8. Indicate whether you want **Voice Prompts** on or off
9. Click “**Add New**” to save the information and complete the process.

PARTITION NAME

When Partitions are enabled (see Dealer/Installer Settings) you may then assign a sensor to a specific partition. This will allow independent control and arming of that partition without disrupting the main panel's master partition. You may create and use up to 4 partitions.

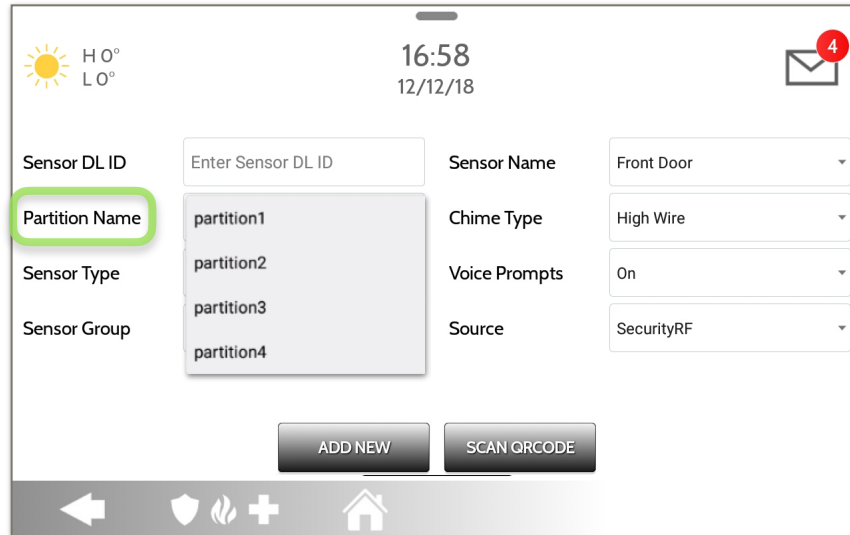

The screenshot displays a mobile application interface for configuring a security sensor. At the top, there is a weather icon, temperature range (H 0°, L 0°), the time (16:58), and the date (12/12/18). A notification icon with the number 4 is in the top right corner. The main form has the following fields:


| | | | |
|-----------------------|---|---------------|---|
| Sensor DL ID | <input type="text" value="Enter Sensor DL ID"/> | Sensor Name | <input type="text" value="Front Door"/> |
| Partition Name | <ul style="list-style-type: none">partition1partition2partition3partition4 | Chime Type | <input type="text" value="High Wire"/> |
| Sensor Type | | Voice Prompts | <input type="text" value="On"/> |
| Sensor Group | | Source | <input type="text" value="SecurityRF"/> |

At the bottom, there are two buttons: "ADD NEW" and "SCAN QR CODE". A navigation bar at the very bottom contains icons for back, shield, fire, plus, and home.

SENSOR TYPE

When adding or editing security devices you can choose from the following sensor types:

- Door/Window
- Motion
- Glass Break
- Key Fob
- Keypad
- Auxiliary Pendant
- Smoke Detector
- CO Detector
- Hardwire Translator
- Wireless Translator
- Temperature
- Heat
- Water
- Shock Sensor
- Freeze
- Tilt
- Door Bell
- Smoke-M
- Door/Window-M
- Occupancy Sensor
- Siren
- High Temperature

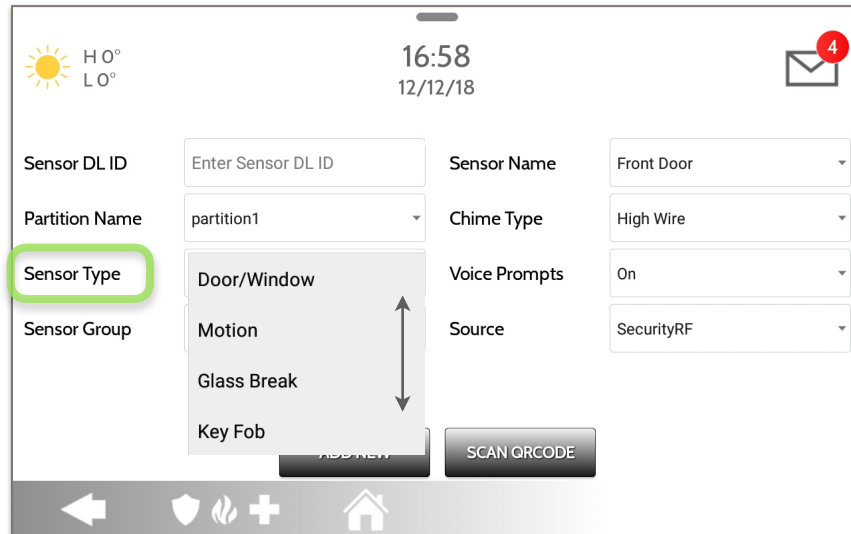

The screenshot shows a mobile application interface for configuring a security sensor. At the top, there is a weather widget showing a sun icon, 'H 0°', and 'L 0°'. The time is 16:58 and the date is 12/12/18. A notification icon with the number 4 is in the top right. The main form has the following fields:

- Sensor DL ID: Enter Sensor DL ID
- Partition Name: partition1
- Sensor Type: **Door/Window** (highlighted with a green box)
- Sensor Group: Motion
- Sensor Name: Front Door
- Chime Type: High Wire
- Voice Prompts: On
- Source: SecurityRF


At the bottom, there is a navigation bar with icons for back, shield, fire, plus, and home. A 'SCAN QR CODE' button is located at the bottom right of the form area.

SENSOR GROUP

Sensor groups will change the behavior of the sensor. These are tied directly to your Sensor Type, displaying only what's relevant.

Touch the "Sensor Group" drop down to change.

A full list of Sensor Groups and descriptions can be found under "Sensor Groups" listed in the manual below.

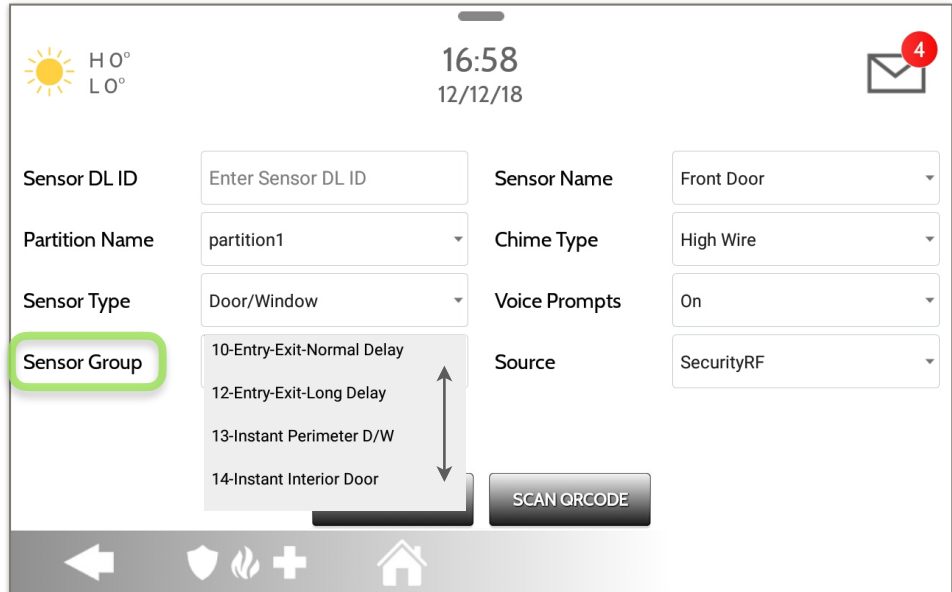

SENSOR GROUPS

IQ Hub supports either PowerG, 319.5 MHz, 345 MHz, or 433 MHz sensors depending on which version of the panel is being used. Sensor Group numbers and behaviors remain the same across all frequencies. When pairing a 345 MHz sensor with the Panel, an additional option for “Loop” number will be shown.

DOOR/WINDOW

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|------------------------------|------------|---|
| 10 | Entry-Exit- Normal Delay | Y | Gives a period of time to exit the home or to disarm the panel when returning before sounding the alarm |
| 12 | Entry-Exit- Long Delay | Y | Gives a period of time to exit the home or to disarm the panel when returning before sounding the alarm. This can be a separate delay from the “normal delay” |
| 13 | Instant Perimeter D/W | Y | Door or window that triggers an alarm instantly when system is armed |
| 14 | Instant Interior Door | Y | An interior sensor that triggers an alarm instantly while armed to both stay and away. Does not trip if an entry/exit sensor is tripped first |
| 16 | Away Instant- Follower Delay | Y | Interior door that triggers alarm instantly when system is armed to away mode only |

DOOR/WINDOW

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|---------------------------------|------------|---|
| 25 | Local Safety Sensor | Y | This sensor does not report or trigger an alarm. This is a chime only sensor when "Activity Monitoring" is active, regardless of panel status. Used for medicine cabinets, chemical storage etc |
| 8 | Reporting Safety Sensor | Y | This sensor reports to the central station and triggers an alarm when "Activity Monitoring" is active, regardless of panel status |
| 9 | Delayed Reporting Safety Sensor | Y | This sensor reports to the central station and triggers an alarm when "Activity Monitoring" is active, regardless of panel status. This sensor has an entry delay |

*345 MHz door/window sensors will have the option to change the "Loop" number to 1 or 2. This will allow the sensor to be programmed twice as 2 different zones.

* Power G Door/Window contact 9945 adds an additional drop down menu to determine the contact type, Reed Switch or Wired.

MOTION

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|----------------------|------------|---|
| 17 | Away- Instant Motion | Y | Active only when armed to “Away”, and trips instantly when motion is detected. Does not trip if an entry/exit sensor is tripped first |
| 15 | Stay- Instant Motion | Y | Active in both “Stay” & “Away” modes, and trips instantly when motion is detected. Does not trip if an entry/exit sensor is tripped first |
| 35 | Stay- Delay Motion | Y | Active in both “Stay” & “Away” modes. Triggers an entry delay when motion is detected. Does not trip if an entry/exit sensor is tripped first |
| 20 | Away- Delay Motion | Y | Active when armed to “Away”. Triggers an entry delay when motion is detected. Does not trip if an entry/exit sensor is tripped first |
| 25 | Safety Motion | Y | This sensor does not report or trigger an alarm. This is a chime only sensor when “Activity Monitoring” is active, regardless of panel status. Used for medicine cabinets, storage, activity tracking, etc |

*345 MHz motion sensors will have the option to change the “Loop” number to 1, 2 or 3. This will allow the sensor to be programmed twice as 2 different zones where supported by the device.

*Power G Motion Detectors with Prefix 120, 122, 130, 140 and 142 offer additional functions such as High Traffic Shutdown and Sensitivity Level. Motions with prefix 123, 126, 127, 128 and 129 offer High Traffic Shutdown only as an additional function.

GLASS BREAK

*345 MHz glass break sensors can be programmed as “Loop” 1 only

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|------------------------|------------|---------------------------------------|
| 13 | Glass Break | Y | Active in both “Stay” and “Away” mode |
| 17 | Glass Break -Away Only | Y | Active in “Away” mode only |

KEY FOB

*345 MHz Keyfobs will follow the IQ Hub’s Keyfob programming and functionality

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|------------------------|------------|--|
| 1 | Mobile Intrusion | N | Worn or carried , the button(s) is/are programmed to trigger a police panic |
| 3 | Mobile Silent | N | Worn or carried , the button(s) is/are programmed to trigger a silent police panic |
| 4 | Fixed Auxiliary | Y | Installed in a fixed location such as night stand, the button(s) is/are programmed to trigger an Auxiliary panic . NOTE: Medical functionality has not been evaluated by UL/cUL |
| 5 | Fixed Silent Auxiliary | Y | Installed in a fixed location such as night stand, the button(s) is/are programmed to trigger a silent Auxiliary panic . NOTE: Medical functionality has not been evaluated by UL/cUL |

KEY FOB

*345 MHz Keyfobs will follow the IQ Hub's Keyfob programming and functionality

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|-------------------------|------------|---|
| 6 | Mobile Auxiliary | N | Worn as a wrist watch or pendant, the button(s) is/are programmed to trigger an Auxiliary panic . NOTE: Medical functionality has not been evaluated by UL/cUL |
| 7 | Mobile Silent Auxiliary | N | Worn as a wrist watch or pendant, the button(s) is/are programmed to trigger a silent Auxiliary panic . NOTE: Medical functionality has not been evaluated by UL/cUL |

KEYPAD

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|------------------|------------|--|
| 0 | Fixed Intrusion | Y | Installed in a fixed location , the keypad is programmed to trigger a police panic . NOTE: Hold-up functionality has not been evaluated by UL/cUL |
| 1 | Mobile Intrusion | N | Keypad can be mobile and is programmed to trigger a police panic |
| 2 | Fixed Silent | Y | Installed in a fixed location , the keypad is programmed to trigger a silent police panic |
| 3 | Mobile Silent | N | Keypad can be mobile and is programmed to trigger a silent police panic |

KEYPAD

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|-------------------------|------------|--|
| 4 | Fixed Auxiliary | Y | Installed in a fixed location such as night stand, the keypad is programmed to trigger an Auxiliary panic. NOTE: Medical functionality has not been evaluated by UL/cUL |
| 5 | Fixed Silent Auxiliary | Y | Installed in a fixed location such as night stand, the keypad is programmed to trigger a silent Auxiliary panic. NOTE: Medical functionality has not been evaluated by UL/cUL |
| 6 | Mobile Auxiliary | N | Keypad can be mobile and is programmed to trigger an Auxiliary panic. NOTE: Medical functionality has not been evaluated by UL/cUL |
| 7 | Mobile Silent Auxiliary | N | Keypad can be mobile and is programmed to trigger a silent Auxiliary panic. NOTE: Medical functionality has not been evaluated by UL/cUL |

AUXILIARY PENDANT

*345 MHz auxiliary pendants can be programmed as “Loop” 1 only

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|--------------------------|------------|--|
| 0 | Fixed Intrusion | Y | Installed in a fixed location such as under a desk, the button(s) is/are programmed to trigger a police panic |
| 1 | Mobile Intrusion | N | Worn or carried, the button(s) is/are programmed to trigger a police panic |
| 2 | Fixed Silent | Y | Installed in a fixed location such as under a desk, the button(s) is/are programmed to trigger a silent police panic |
| 3 | Mobile Silent | N | Worn or carried , the button(s) is/are programmed to trigger a silent police panic |
| 4 | Fixed Auxiliary | Y | Installed in a fixed location such as night stand, the button(s) is/are programmed to trigger an auxiliary panic |
| 5 | Fixed Silent Auxiliary | Y | Installed in a fixed location such as night stand, the button(s) is/are programmed to trigger a silent Auxiliary panic . NOTE: Medical functionality has not been evaluated by UL/cUL |
| 6 | Mobile Auxiliary | N | Worn as a wrist watch or pendant, the button(s) is/are programmed to trigger an Auxiliary panic |
| 7 | Mobile Silent Auxiliary | N | Worn as a wrist watch or pendant, the button(s) is/are programmed to trigger a silent Auxiliary panic . NOTE: Medical functionality has not been evaluated by UL/cUL |
| 25 | Safety Auxiliary Pendant | N | Used for local alerts like a nurse call button. Will not report an alarm to the Central Station |

*345 MHz smoke sensors will have the option to change the “Loop” number to 1, 2 or 3. This will allow the sensor to be programmed twice as 2 different zones where supported by the device

SMOKE DETECTOR/HEAT

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|------------|------------|--|
| 26 | Smoke-Heat | Y | Triggers an alarm when sensor detects smoke/rapid rise in heat |

SMOKE-M

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|------------|------------|--|
| 26 | Smoke-Heat | Y | Triggers an alarm when sensor detects smoke or a rapid rise of heat. Use ONLY with Qolsys multi-sensor smoke (QS5110-840) |

CO DETECTOR

*345 MHz carbon monoxide sensors can be programmed as “Loop” 1 only

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|------|------------|---|
| 34 | CO | Y | Triggers an alarm when sensor detects Carbon Monoxide |

HARDWIRE TRANSLATOR & WIRELESS TRANSLATOR

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|----------|------------|--|
| 13 | Takeover | Y | Triggers an alarm when sensor is tampered in “Stay” or “Away” mode |

TILT

*345 MHz tilt sensors can be programmed as “Loop” 3 only

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|--------------------------|------------|--|
| 10 | Entry-Exit- Normal Delay | Y | Triggers alarm after “normal delay” expires. Arms with both “Stay” and “Away” |
| 12 | Entry-Exit- Long Delay | Y | Triggers alarm after “long delay” expires. Arms with both “Stay” and “Away” |
| 25 | Garage Tilt- Safety Tilt | Y | This sensor group does not report or trigger an alarm. This is a chime only sensor when “Activity Monitoring” is active, regardless of panel status. Great for detached garage/shops. NOTE: Functionality in conjunction with garage door openers has not been evaluated by UL/cUL |

WATER

*345 MHz water sensors will have the option to change the “Loop” number to 1, 2 or 3. This will allow the sensor to be programmed twice as 2 different zones where supported by the device

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|---------------------|------------|--|
| 38 | Water Sensor | Y | Triggers an alarm when sensor detects presence of water. NOTE: flood sensor functionality has not been evaluated by UL/cUL |
| 25 | Water Non-Reporting | Y | Used for local alerts. Will not report an alarm to the Central Station |

Please note: When selecting “Water” you will see two additional options under “Sensor Sub-Type”. For IQ TempH2O (QS5500-PO1) & the IQ Flood (QS5516-840/QS5536-840) select “IQ Flood”, for all others, select “Other Flood”

SHOCK SENSOR

*345 MHz shock sensors will have the option to change the “Loop” number to 1 or 3. This will allow the sensor to be programmed twice as 2 different zones where supported by the device

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|-----------------------|------------|---|
| 13 | Shock-Glass-Break | Y | Arms and trips shock sensors immediately when armed to both “Stay” and “Away” |
| 17 | Glass-Break-Away Only | Y | Arms and trips shock sensors immediately when armed only to “Away” |

Please note: When selecting “Shock” you will see two additional options under “Sensor Sub-Type”. For IQ Shock select “IQ Shock”, for all others select “Other Shock”. *Power G Shock Sensor with prefix 170 offers additional sensitivity level functions

FREEZE

*345 MHz temp sensors can be programmed as “Loop” 1 only

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|----------------------|------------|---|
| 52 | Freeze | Y | Triggers an alarm when sensor detects low temperatures. NOTE: temperature sensor functionality has not been evaluated by UL/cUL |
| 25 | Freeze Non-Reporting | Y | Used for local alerts. Will not report an alarm to the Central Station |

Please note: When using the PG9905 with Group 52, Freeze, the Low threshold setting is set to 40°F by default. The Low threshold can be customized between -22°F and 158°F.

HIGH TEMPERATURE

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|--------------------|------------|--|
| 53 | Temp Reporting | Y | Triggers an alarm when sensor detects high temperatures. NOTE: temperature sensor functionality has not been evaluated by UL/cUL |
| 25 | Temp Non-Reporting | Y | Used for local alerts. Will not report an alarm to the Central Station |

Please note: When using the PG9905 with Group 53, the High threshold setting is set to 100°F by default. The High threshold can be customized between -22°F and 158°F.

DOOR BELL

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|---------------------|------------|---|
| 25 | Local Safety Sensor | Y | This sensor does not report or trigger an alarm. This is a chime only sensor when "Activity Monitoring" is active, regardless of panel status. Great to automate lights, cameras and notifications etc |

SIREN

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|---------------------|------------|--|
| 33 | Siren | Y | Used for supervising Z-Wave sirens for wireless connectivity. Reports to the central station. |
| 25 | Local Safety Sensor | Y | Used for supervising Z-Wave sirens for wireless connectivity. Local supervision only. Does NOT report to the central station. |

DOOR/WINDOW-M (For use only with Multi-function Door/Window Sensors)

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|------------------------------|------------|---|
| 10 | Entry-Exit- Normal Delay | Y | Gives a period of time to exit the home or to disarm the panel when returning before sounding the alarm |
| 12 | Entry-Exit- Long Delay | Y | Gives a period of time to exit the home or to disarm the panel when returning before sounding the alarm. This can be a separate delay from the "normal delay" |
| 13 | Instant Perimeter D/W | Y | Door or window that triggers alarm instantly when system is armed |
| 14 | Instant Interior Door | Y | An interior sensor that triggers an alarm instantly while armed to both stay and away. Does not trip if an entry/exit sensor is tripped first |
| 16 | Away Instant- Follower Delay | Y | Interior door that triggers alarm instantly when system is armed to away mode only |

DOOR/WINDOW-M (For use only with Multi-function Door/Window Sensors)

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|---------------------------------|------------|---|
| 25 | Local Safety Sensor | Y | This sensor does not report or trigger an alarm. This is a chime only sensor when "Activity Monitoring" is active, regardless of panel status. Used for medicine cabinets, chemical storage etc |
| 8 | Reporting Safety Sensor | Y | This sensor reports to the central station and triggers an alarm when "Activity Monitoring" is active, regardless of panel status |
| 9 | Delayed Reporting Safety Sensor | Y | This sensor reports to the central station and triggers an alarm when "Activity Monitoring" is active, regardless of panel status. This sensor has an entry delay |

OCCUPANCY SENSOR


| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|---------------------|------------|---|
| 25 | Local Safety Sensor | Y | This sensor group is to be used for monitoring activity in the home. This group does not report |

TEMPERATURE

| GROUP | NAME | SUPERVISED | SCENARIO |
|-------|--------------------|------------|--|
| 51 | Temp Non Reporting | Y | Only for use with the PowerG Temp Sensor (PG9905). This sensor group does not report to the Central Station. Allows for actual temperature monitoring (thermometer) with customizable high/low threshold settings |
| 52 | Freeze | Y | Triggers an alarm when sensor detects low temperatures. NOTE: temperature sensor functionality has not been evaluated by UL/cUL |
| 53 | Temp Reporting | Y | Triggers an alarm when sensor detects high temperatures. NOTE: temperature sensor functionality has not been evaluated by UL/cUL |

Please note: When using the PG9905 with Group 51, the High & Low threshold settings are set to 40°F and 100°F by default. When using Group 52, the Low threshold setting is set to 40°F by default. When using Group 53, the High threshold setting is set to 100°F by default. Thresholds can be customized between -22°F and 158°F.

SENSOR NAME

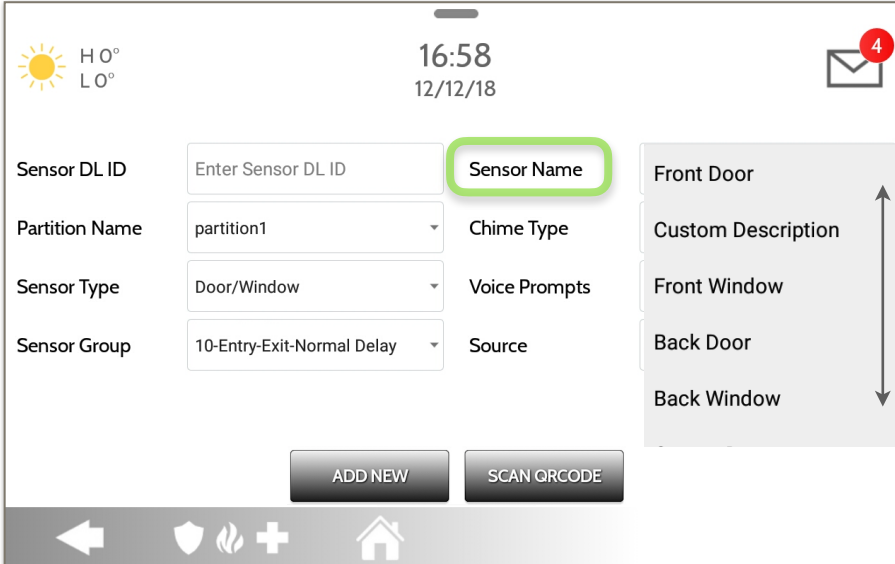

The screenshot displays the configuration screen for a security sensor. At the top, there is a weather icon, temperature (H 0°, L 0°), time (16:58), and date (12/12/18). A notification icon with a red '4' is in the top right. The main area contains several input fields and a scrollable list:


- Sensor DL ID:** Enter Sensor DL ID (with a green highlight around the 'Sensor Name' label next to it)
- Partition Name:** partition1
- Sensor Type:** Door/Window
- Sensor Group:** 10-Entry-Exit-Normal Delay
- Chime Type:** (empty)
- Voice Prompts:** (empty)
- Source:** (empty)

On the right, a scrollable list of preset sensor names is shown: Front Door, Custom Description, Front Window, Back Door, and Back Window. A vertical double-headed arrow indicates that this list can be scrolled. At the bottom, there are two buttons: 'ADD NEW' and 'SCAN QR CODE'. A navigation bar at the very bottom contains icons for back, home, and other functions.

When you select the sensor name field you can choose from a variety of preset sensor names by scrolling up and down or create a custom description.

SENSOR NAME: CUSTOM DESCRIPTION

When you select “Custom Description” as your sensor name the android keyboard will appear. Type in the desired name (up to 56 characters) and click “Done.” The name will appear in the field below “Sensor Name.”

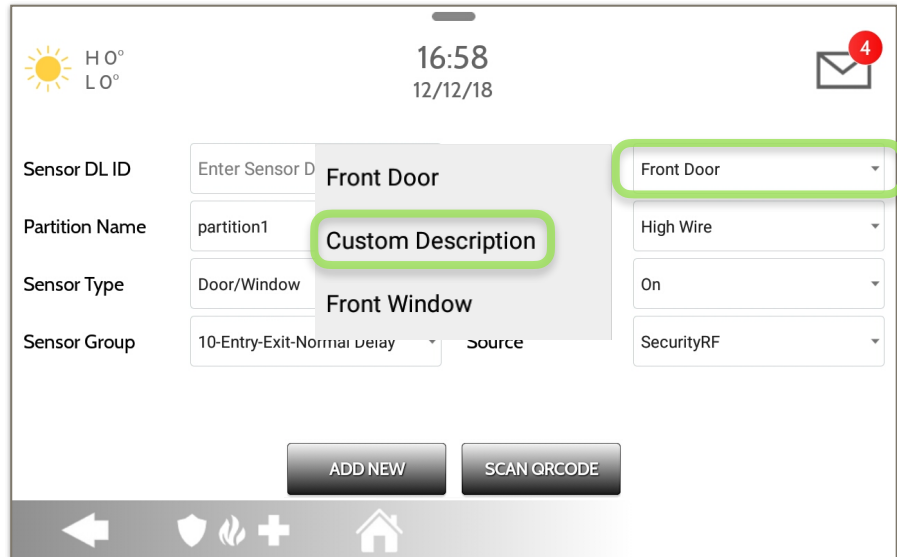

The screenshot displays the 'ADD NEW' sensor screen. At the top, there is a weather icon, temperature (H 0°, L 0°), time (16:58), and date (12/12/18). A notification icon with a red '4' is in the top right. The form fields are as follows:

- Sensor DL ID:** Enter Sensor D
- Partition Name:** partition1
- Sensor Type:** Door/Window
- Sensor Group:** 10-Entry-Exit-Normal delay
- Sensor Name:** A dropdown menu is open, showing 'Front Door' (highlighted with a green box), 'Custom Description' (highlighted with a green box), 'High Wire', 'On', and 'SecurityRF'.

At the bottom, there are two buttons: 'ADD NEW' and 'SCAN QR CODE'. Below these is a navigation bar with icons for back, shield, plus, and home.

CHIME TYPE


The screenshot shows a mobile application interface for configuring a security sensor. At the top, there is a weather icon, temperature (H 0°, L 0°), the time 16:58, and the date 12/12/18. A notification icon with the number 4 is in the top right corner. The main form has several fields:

- Sensor DL ID:** Enter Sensor DL ID
- Partition Name:** partition1
- Sensor Type:** Door/Window
- Sensor Group:** 10-Entry-Exit-Normal Delay
- Sensor Name:** Front Door
- Chime Type:** A dropdown menu is open, showing options: None, High Wire, On The Hunt, Door Bell, and Heaven. This dropdown is highlighted with a green box.
- Voice Prompts:** (empty field)
- Source:** (empty field)

At the bottom of the form are two buttons: "ADD NEW" and "SCAN QR CODE". The bottom navigation bar contains icons for back, shield, fire, plus, and home.

Because of the dynamic nature of the way the IQ Hub pairs and understands each individual sensor, you can program each sensor to have a unique chime or even turn chiming off for that individual sensor. To customize your chime for a particular sensor touch the Chime Type drop down and choose from the list.

VOICE PROMPTS

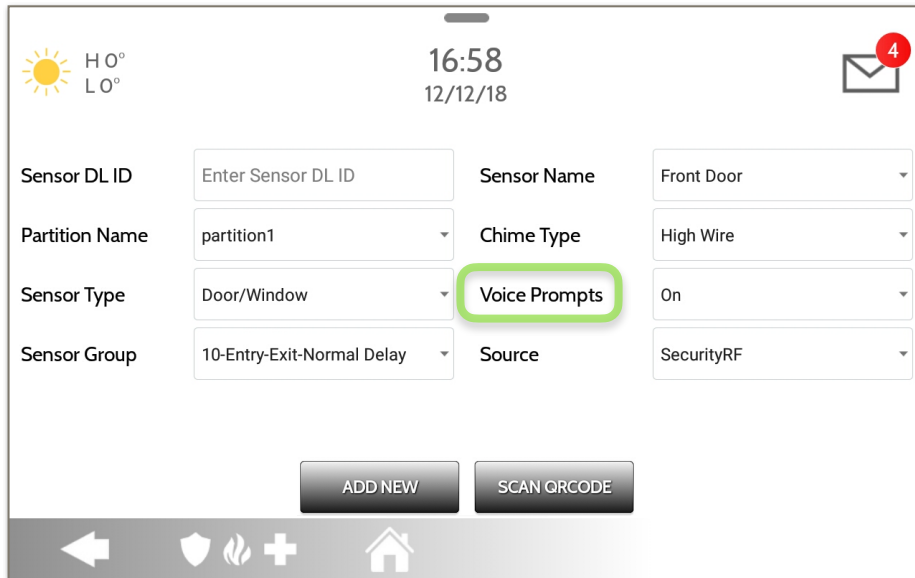

The screenshot shows a mobile application interface for configuring a security sensor. At the top, there is a weather icon, the time 16:58, and the date 12/12/18. A notification icon with a red circle containing the number 4 is in the top right. The main configuration area consists of several rows of labels and input fields:

- Sensor DL ID:** Enter Sensor DL ID
- Partition Name:** partition1
- Sensor Type:** Door/Window
- Sensor Group:** 10-Entry-Exit-Normal Delay
- Sensor Name:** Front Door
- Chime Type:** High Wire
- Voice Prompts:** On (This field is highlighted with a green border)
- Source:** SecurityRF

At the bottom, there are two buttons: "ADD NEW" and "SCAN QR CODE". A navigation bar at the very bottom contains icons for back, shield, fire, plus, and home.


Voice prompts announce the sensor name when the sensor is opened or tripped.*

For door/window sensors, voice prompts are defaulted to “On”. For most other sensors the default is “Off.” Touch the drop down menu to change.

Choose individually which sensors should have voice prompts ON or OFF

***NOTE:** “Activity Monitoring Sensors” will also audibly report when they have been closed.

SOURCE

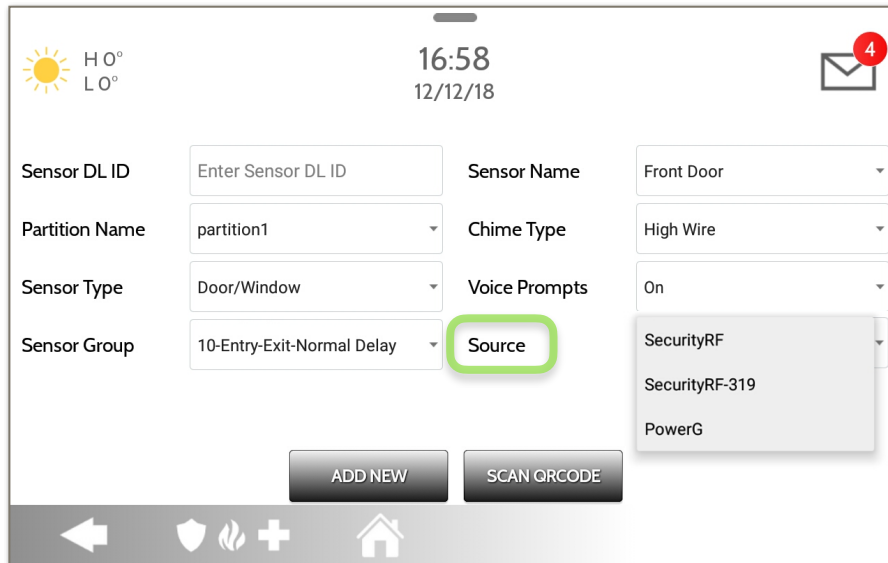

H 0°
 L 0°

16:58
12/12/18

Sensor DL ID: Enter Sensor DL ID
 Partition Name: partition1
 Sensor Type: Door/Window
 Sensor Group: 10-Entry-Exit-Normal Delay

Sensor Name: Front Door
 Chime Type: High Wire
 Voice Prompts: On

Source
 SecurityRF
 SecurityRF-319
 PowerG

ADD NEW SCAN QR CODE

Source indicates the sensor's incoming frequency when pairing to the IQ Hub and depends on which version of the panel you are using. Source will be displayed as one of the following:

- PowerG
- SecurityRF
- SecurityRF-319
- S-Line
- SecurityRF-345
- 345RF 2G
- SecurityRF-433

EDIT SENSOR



Edit Sensor

Edit sensors after they have already been learned in. All fields can be edited with the exception of the DL or Sensor ID.

| NO | PTID | ID | SIGNAL SOURCE | TYPE | NAME | GROUP | EDIT |
|----|------|--------|---------------|-------------|----------------------------|----------------------------|------|
| 1 | 1 | 12BEA1 | G | Motion | Upstairs Motion Detector | 17-Away-Instant Motion | |
| 2 | 1 | 12BEA2 | G | Motion | Downstairs Motion Detector | 17-Away-Instant Motion | |
| 3 | 1 | 12BEA3 | G | Door/Window | Front Door | 10-Entry-Exit-Normal Delay | |
| 4 | 1 | 12BEA4 | G | Door/Window | Laundry Door | 10-Entry-Exit-Normal Delay | |
| 5 | 1 | 12BEA5 | G | Door/Window | Back Door | 13-Instant Perimeter DAW | |

To make changes to a sensor, touch the “Pencil” icon next to the sensor that needs editing. Change desired fields and then touch “SAVE”.

FIND IT

Swipe down for access


- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- INSTALLATION
- DEVICES
- SECURITY SENSORS
- EDIT SENSOR

DELETE SENSOR




Delete Sensor

Delete each sensor individually or choose to delete more than one at a time. This is useful when needing to replace a sensor all together instead of simply editing programmed information.

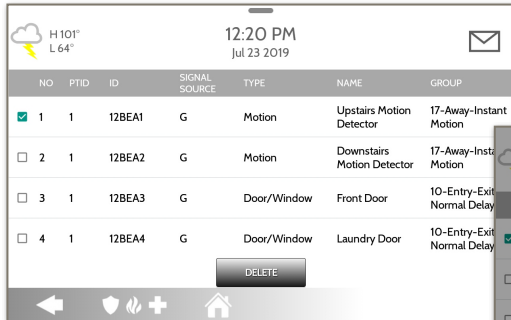

Select the sensor(s) from the list that are to be deleted and then touch “DELETE”

Verify that the action is correct and touch “OK” to confirm or “CANCEL” to quit the operation

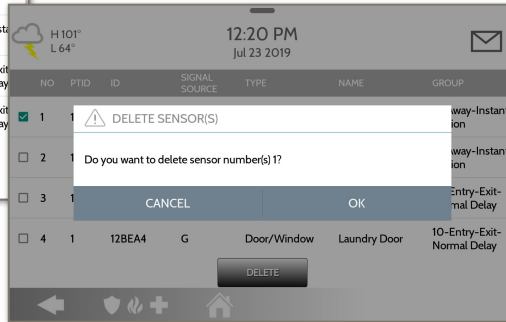

FIND IT

Swipe down for access

- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- INSTALLATION
- DEVICES
- SECURITY SENSORS
- DELETE SENSOR

SENSOR STATUS



Sensor Status

Monitor sensor status in real time for things like open, close, tamper, idle and low battery.

H 101°
L 64°

12:29 PM
Jul 23 2019

| NO | PTID | ID | SIGNAL SOURCE | NAME | TYPE | GROUP | STATUS |
|----|------|--------|---------------|----------------------------|-------------|----------------------------|--------|
| 1 | 1 | 12BEA1 | G | Upstairs Motion Detector | Motion | 17-Away-Instant Motion | Idle |
| 2 | 1 | 12BEA2 | G | Downstairs Motion Detector | Motion | 17-Away-Instant Motion | Idle |
| 3 | 1 | 12BEA3 | G | Front Door | Door/Window | 10-Entry-Exit-Normal Delay | Closed |
| 4 | 1 | 12BEA4 | G | Laundry Door | Door/Window | 10-Entry-Exit-Normal Delay | Closed |
| 5 | 1 | 12BEA5 | G | Back Door | Door/Window | 13-Instant Perimeter D/W | Open |

This page also allows you to quickly review programming for things like Zone number, Partition, Signal Source (319, 345, 433, PowerG), Sensor Name, Sensor Type and Sensor Group.

FIND IT

12:55
02/01/16

Swipe down
for access

- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- INSTALLATION
- DEVICES
- SECURITY SENSORS
- SENSOR STATUS

SENSOR GROUP



Sensor Group

Don't have this manual handy on an install? Sensor Group gives you digital access to view each possible sensor group and its behaviors directly on the panel.

| ID | TYPE | NAME | SUPERVISORY | RESTORAL | TIMER | SIREN TYPE |
|----|-------------------|------------------|-------------|----------|-----------|------------|
| 0 | Auxiliary Pendant | Fixed Intrusion | Y | N | Immediate | Siren3 |
| 1 | Auxiliary Pendant | Mobile Intrusion | N | N | Immediate | Siren3 |
| 2 | Auxiliary Pendant | Fixed Silent | Y | N | Immediate | Siren3 |
| 4 | Auxiliary Pendant | Fixed Auxiliary | Y | N | Immediate | Siren3 |
| 6 | Auxiliary Pendant | Mobile Auxiliary | N | N | Immediate | Siren3 |

The Sensor Group list is sorted by "Type" in alphabetical order from A - Z.

FIND IT

- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- INSTALLATION
- DEVICES
- SECURITY SENSORS
- SENSOR GROUP

WI-FI DEVICES

WI-FI DEVICES



Wi-Fi Devices

View and remove Wi-fi devices associated with the panel as well as configure the Qolsys Access point.



Wi-Fi

Scan and connect to a Wi-Fi network. This will ensure your panel can receive software updates and have a Dual Path connection.



Access Point Settings

Configure the IQ Hub's built in router. Enable/Disable the router, broadcast or hide the SSID and change the SSID's password etc...



Access Point Connected Devices


View connected device information such as IP, MAC address and for how long the device has been connected.



IQ Remote Devices

Pair an IQ Remote Secondary Touchscreen to the panel whether it is connected to the customer's network or the panel's built in Access Point.

FIND IT

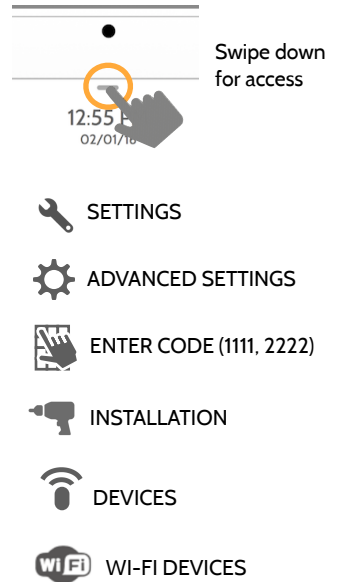

CONNECTING TO WI-FI



To connect to a Wi-Fi network, follow the steps below:

Swipe down from the top menu bar and select settings.



Touch Advanced Settings (Installer Code)



Then touch “Wi-Fi”



Enable Wi-Fi if not already active

Available networks appear in a list. Touch the desired network and use the keyboard to type the password (if required)

Activate WIFI



Qolsys-5G
Connected



Now Communications



Qolsys




Sunset Room




Vertical Ops 2.4

+ Add wi-fi network

FIND IT

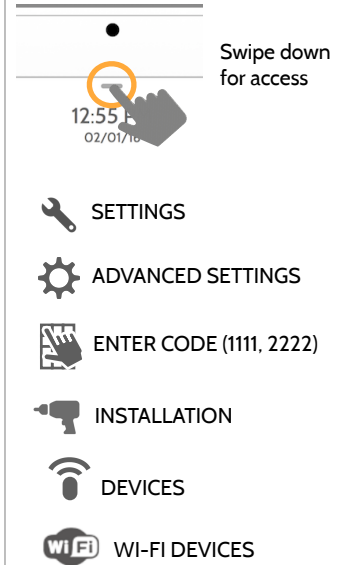

ACCESS POINT SETTINGS

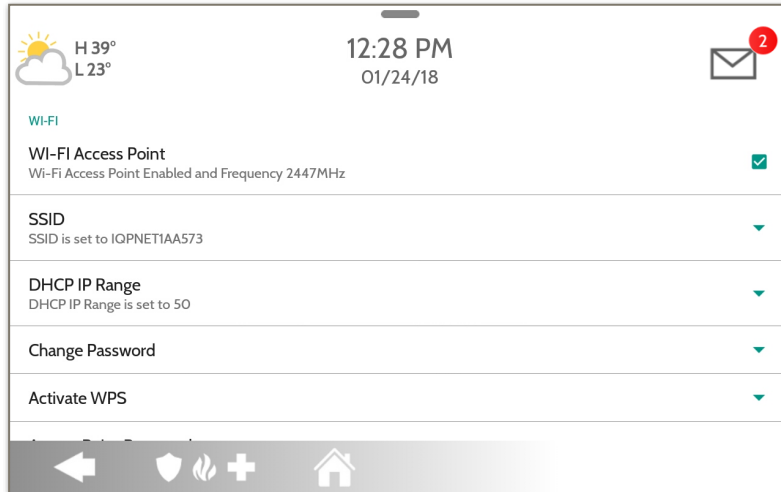

Wi-Fi Access Point:

Enable or Disable the Panel Access Point

SSID:

Change the SSID Name. This is the name that other devices will use to connect to.

DHCP IP Range:

Modify the DHCP IP Range for the access point. Default is 50.

Change Password:

Change the password of the SSID to one of your choosing.


Activate WPS:

Connect devices to the panel's built-in access point using WPS push button.

Access Point Password:

Shows current password in use for the Panel Access Point

ACCESS POINT CONNECTED DEVICES

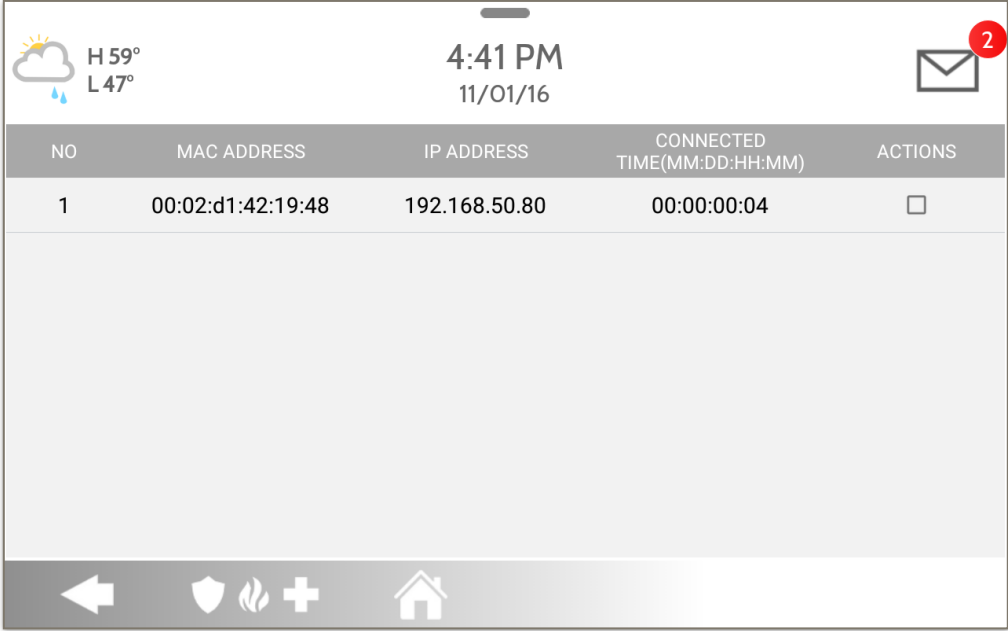

| NO | MAC ADDRESS | IP ADDRESS | CONNECTED TIME(MM:DD:HH:MM) | ACTIONS |
|----|-------------------|---------------|-----------------------------|--------------------------|
| 1 | 00:02:d1:42:19:48 | 192.168.50.80 | 00:00:00:04 | <input type="checkbox"/> |

View the IP address, Mac address and connected duration of each Wi-Fi client connected to the panel's built in router.

Select "Actions" to then remove a device that has been associated with the panel.


You must remove saved network information from the device otherwise it will re-connect to the panel.

IQ REMOTE DEVICES



IQ Remote Devices

Pair up to 3 IQ Remote Secondary Touchscreens to the panel via the customer's network or the panel's built in access point.

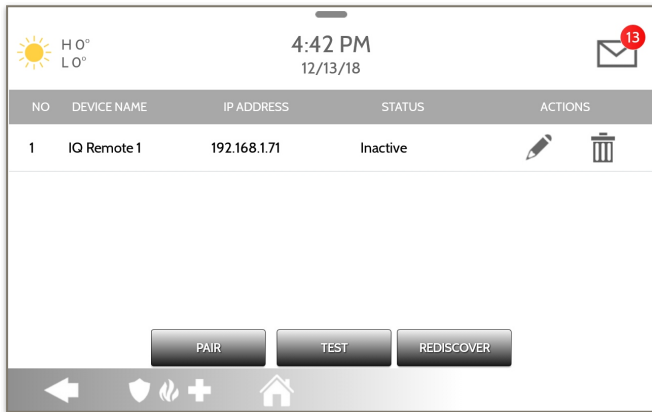

NOTE: The IQ Remote will automatically pair as Sensor Type “Keypad” and will appear on the zone list in the order in which it is paired. Sensor Groups 0, 1 & 2 are available options for this Sensor Type.

1. Connect the IQ Remote to the panel's access point or to the same Wi-Fi network the panel is connected to. **NOTE:** QW9102 & QW9103 IQ Remotes only support 2.4 GHz networks. QW9104 IQ Remotes support both 2.4 GHz and 5 GHz.
2. Prior to pairing the IQ Remote to the panel you can Test the connection by select TEST on the panel and the remote.
3. Select “Pair” on the Panel and then Pair on the IQ Remote to begin during this process the remote will also download and update to the current software version and reboot.
4. The remote device will pair to the panel and will show that it is active on the list. You can then edit (device name and sensor group), ping, delete or rediscover the device if necessary

Z-WAVE DEVICES

Z-WAVE DEVICES



Z-Wave Devices

Add, Edit, Clear and Remove Z-Wave Devices. You can also View/Edit associations as well as access Z-Wave Settings.



Add Device (Inclusion)

Add new devices to the Z-Wave network



Edit Device

Make changes to existing devices



Clear Device (Exclusion)

Removes a Z-Wave device from its previous network. Also deletes a device from the IQ Hub if currently paired.



Delete Failed Device

Remove a failed Z-Wave device from the IQ Hub's memory



Remove All Devices (Factory Default Reset)

If this controller is the primary controller for your network, resetting it will result in the nodes in your network being orphaned and it will be necessary after the reset to exclude and re-include all of the nodes in the network. If this controller is being used as a secondary controller in the network, use this procedure to reset this controller only in the event that the network primary controller is missing or otherwise inoperable.



View/Edit Associations

Manually change Z-Wave associations for specific devices.



Z-Wave Settings

Configure device limits and other Z-Wave settings.



SmartStart

Enter the device's DSK.



Provisioning List

Devices added via SmartStart will show their progress of being included into the network.


ADD DEVICE



1. Select “Add Device”



2. Touch “Include”

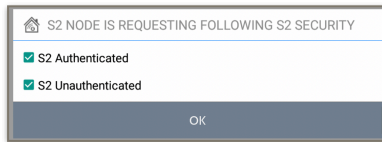


3. Press the “Pair” or “Learn” button on the device when the message appears. *(see individual device documentation for instructions on button location)*

4. Adjust the device name by touching and making the appropriate selections.

5. Select “Automation” to enable simple light rules.


- **Night:** Turns light on at 7pm and off at 6am
- **Evening:** Turns light on at 7pm and off at 11pm
- **Front Door:** Turns light on for 15mins when Front Door opens (must have a sensor with the default quick name “Front Door” added in the panel).

6. Click “Add” to save the information and complete the process. (Adjustments can be made later from “Edit Device” icon)

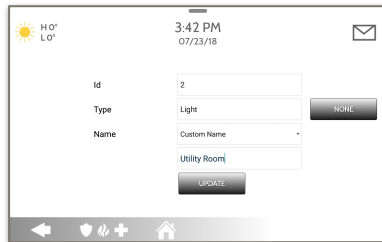

S2 is a new Z-Wave Security Protocol. When an S2 node is attempting to be included it will request S2 security keys. These are based on the level of S2 security that the end device requires. These keys can be Unauthenticated, Authenticated or Access. These keys can be manually granted by selecting the appropriate option.

FIND IT

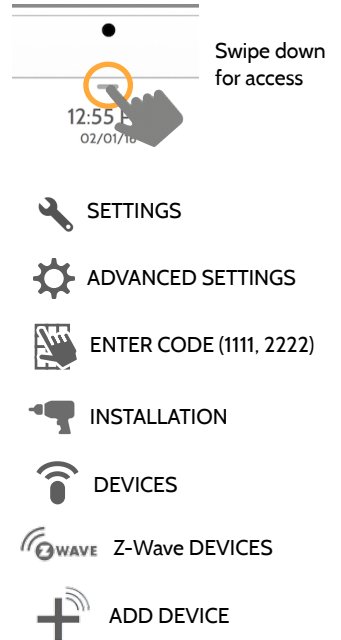


CLEAR DEVICE



Clears Z-Wave device from a network, whether it was enrolled with another controller previously or the IQ Hub. Also deletes a device from the IQ Hub if currently paired.



Touch
"Clear Device"

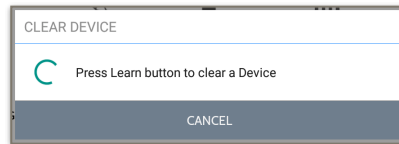

Panel will start sending a
"Clear" signal



Press
"Pair" or "Learn"
button on device*

Panel returns to
Z-Wave Device
menu when
complete

NOTE: Each Z-Wave device is different, and not all devices have a hard button to pair or learn. Refer to your device's installation manual for specifics on pairing or learning.


DELETE FAILED DEVICE



Deletes Z-Wave device from the panel. Before adding the device to another network see instructions on how to “Exclude” a Z-Wave device. Only allows a Node ID to be deleted if it has failed and is no longer communicating.



Touch
“Delete Failed
Device From
Panel”

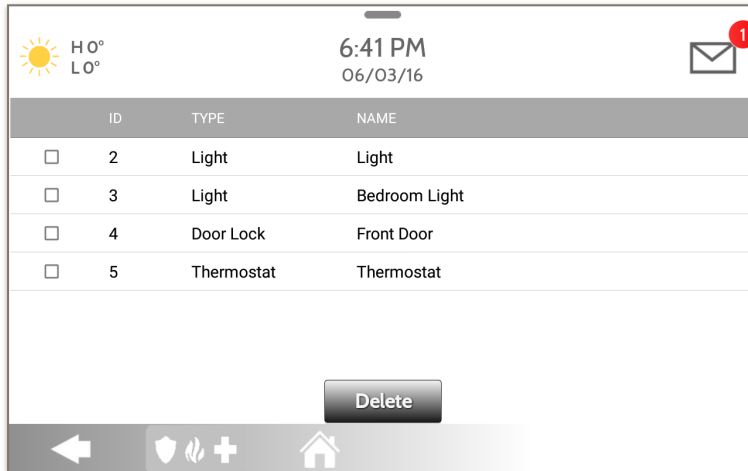

| ID | TYPE | NAME | |
|--------------------------|------|------------|---------------|
| <input type="checkbox"/> | 2 | Light | Light |
| <input type="checkbox"/> | 3 | Light | Bedroom Light |
| <input type="checkbox"/> | 4 | Door Lock | Front Door |
| <input type="checkbox"/> | 5 | Thermostat | Thermostat |

Check the boxes next to the device(s) you want to delete




Touch “Delete”

REMOVE ALL DEVICES



Deletes all Z-Wave devices from the panel and resets the panel's Z-Wave controller.

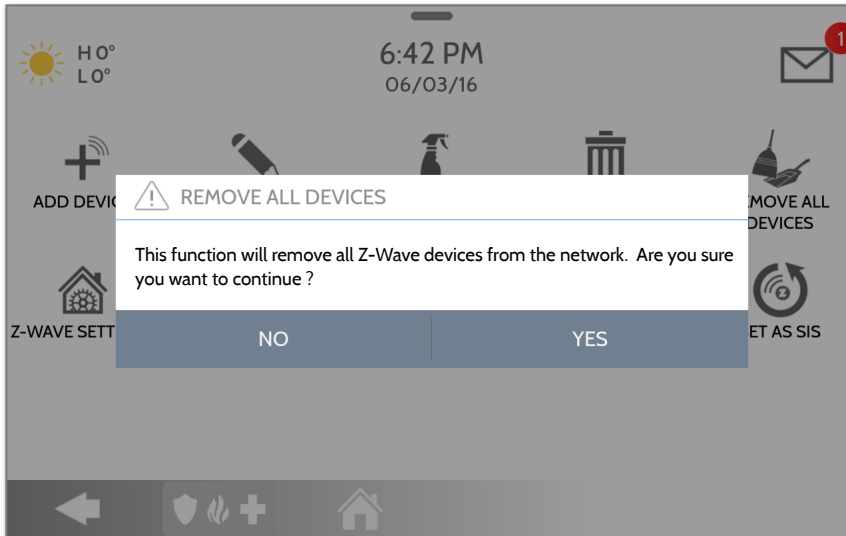


Touching "Remove All Devices" brings a confirmation pop-up asking you to confirm your decision to remove all devices.

If this controller is the primary controller for your network, resetting it will result in the nodes in your network being orphaned and it will be necessary after the reset to exclude and re-include all of the nodes in the network. This procedure will send a "Device Reset Locally" to all Z-Wave devices in the IQ Hub's Lifeline Group (Group 1).

VIEW/EDIT ASSOCIATIONS



Manually change Z-Wave associations for specific devices.

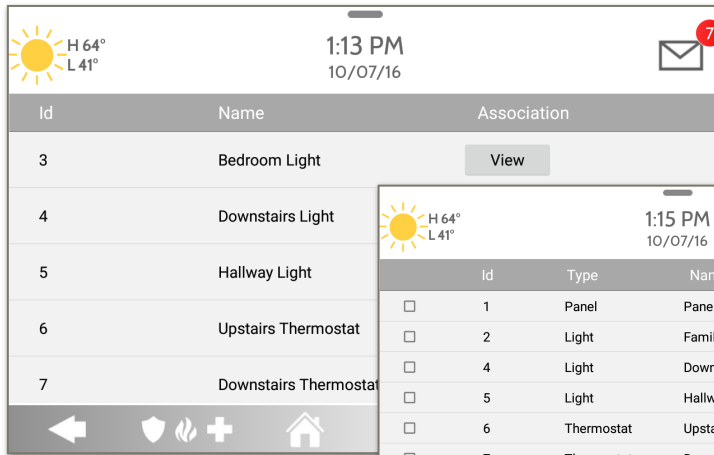


1. Select the Z-Wave device you would like to associate with another by touching “View”

2. Select “Edit”



3. “Check” the boxes next to each device that you would like to associate with. Then select “Save”

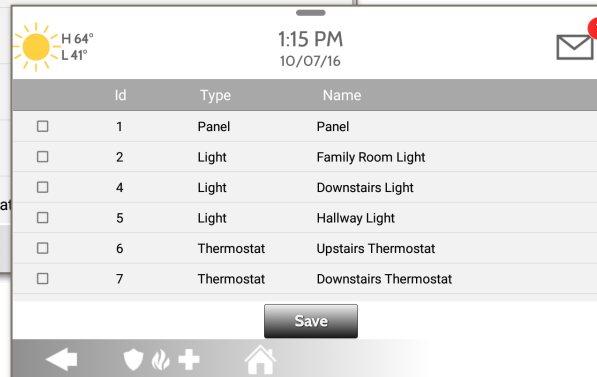

Note: The IQ Hub supports Lifeline in Group 1 to send out Device Reset Locally when it has been associated to another Z-Wave Plus device. This is triggered when “REMOVE ALL DEVICES” is used


Z-WAVE SETTINGS

Z-Wave Settings allow an installer to set a maximum number of Z-Wave devices allowed on the IQ Hub in all categories and to control other Z-Wave settings.

| Device | Default | Maximum Number Supported |
|----------------------|---------|---|
| Thermostats | 10 | Maximum number of supported Thermostats is 10 |
| Smart Sockets* | 15 | Maximum number of supported IQ Smart Sockets is 15 |
| Lights | 80 | Max number of supported Z-Wave light modules is 80 |
| Door Locks | 20 | Maximum number of supported Z-Wave Door Locks is 20 |
| Other Z-Wave Devices | 21 | Maximum number of misc Z-Wave devices is 21 |
| Garage Doors | 6 | Maximum number of Garage Doors is 6 |

NOTE: This feature has not been evaluated by UL/cUL. This is a supplementary functionality that will not interfere with the minimum mandatory operation of the life safety and burglary protection of the alarm system control unit. UL Note: Additional Z-Wave devices other than what has been indicated as maximum limits have not been evaluated by UL/cUL.

FIND IT

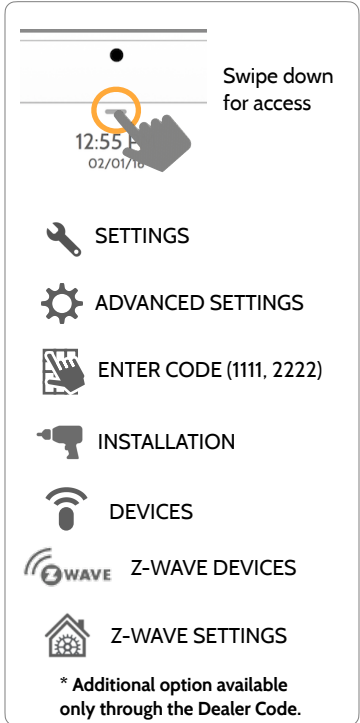

Z-WAVE SETTINGS

| Setting | Default | Description |
|-------------------------------------|----------|--|
| Allow Master Code Z-Wave Settings | Disabled | Allow Master User Code to access Z-Wave Settings |
| Allow Master Code Z-Wave Management | Disabled | Allow Master User Code to access Z-Wave Devices (Add, Edit, Clear, Delete Failed Device, Remove All Devices & View/Edit Associations) |
| Access to Automation | Enabled | When enabled it allows the ability to apply simple automated actions to lights and switches directly from the panel |
| Z-Wave | Enabled | Activate or deactivate the Z-Wave radio. Please use this procedure only when the controller (panel) is missing or inoperable |
| Advanced Z-Wave Settings | Disabled | <p>When Advanced Z-Wave Settings is enabled the following new icons will appear on the Z-Wave Devices page:</p> <ul style="list-style-type: none"> - Continuous Add Devices: Activates an “always listening” enroll mode. Include one Z-Wave device after another. When complete you can edit the device(s) with a custom name - Replace Failed Node: Allows a node that has failed to be replaced with a new device using the same node ID - Manage Devices From Secondary Controllers: Allows secondary controllers to manage devices on the network - Controller Shift: Shifts the primary controller from IQ Hub to another controller - Add/Remove Controller: This icon acts like an “Add/Remove” button when pairing the IQ Hub into another network |


SMARTSTART



1. Select “SmartStart”

INCLUDE

2. Touch “Include”

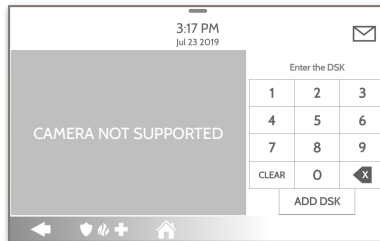


3. Manually enter the DSK code and select Add DSK.

4. Adjust the device name by touching and making the appropriate selections.


5. Select “Automation” to enable simple light rules.

- **Night:** Turns light on at 7pm and off at 6am
- **Evening:** Turns light on at 7pm and off at 11pm
- **Front Door:** Turns light on for 15mins when Front Door opens (must have a sensor with the default quick name “Front Door” added in the panel).

6. Click “Add” to save the information and complete the process. (Adjustments can be made later from “Edit Device” icon)

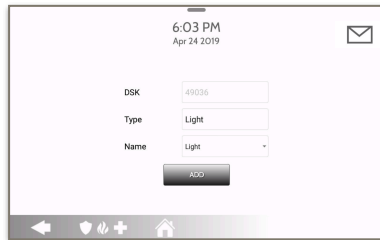

FIND IT



Swipe down for access



SETTINGS



ADVANCED SETTINGS



ENTER CODE (1111, 2222)



INSTALLATION



DEVICES



Z-WAVE DEVICES




SMARTSTART

PROVISIONING LIST



Provisioning List

Devices added via SmartStart will show up in the provision list. This list will show the network status of those devices. Once a device reaches the “Included” state on the panel, it can no longer be deleted using the trash can method and must follow standard clearing process.

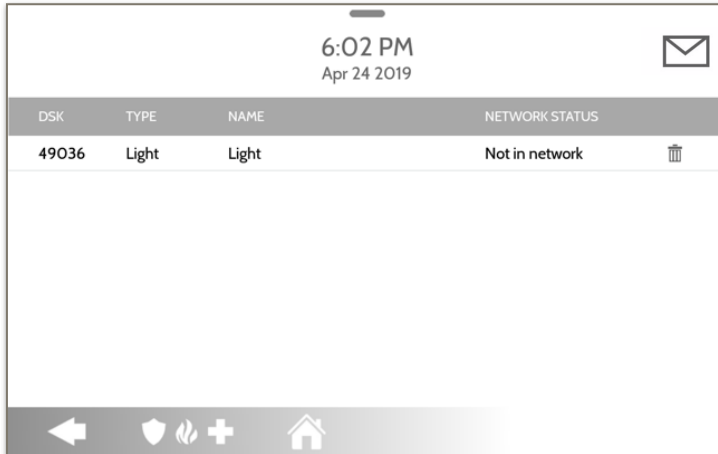

| DSK | TYPE | NAME | NETWORK STATUS |
|-------|-------|-------|----------------|
| 49036 | Light | Light | Not in network |

NETWORK STATUS:

Not in network: When a device has been paired but has not yet been plugged in it will show Not in Network. These devices can also be deleted using the trash can.

Started: Once the device has been paired and then plugged in, it will start the inclusion process with the panel and run in the background.

Included: When a device has completed the inclusion process it will then show as “included” in the provisioning list and at that point the panel’s UI will reflect the included devices.

BLUETOOTH DEVICES

BLUETOOTH DEVICES



Bluetooth Devices

Add, Edit, Delete and Configure a Bluetooth Device. Bluetooth disarm supported via a mobile device. Bluetooth Chime, announcement and 2 Way Voice supported on Anker 3102, 3108 or 3109 Bluetooth speaker.



Add Device

Pair up to 5 mobile Bluetooth devices.



Edit Device

Make changes to existing Bluetooth devices.



Delete Device

Delete a paired Bluetooth device



Remove All Devices

Removes all paired Bluetooth devices at once.



Settings


Toggle Bluetooth on/off, adjust Bluetooth disarm settings and change Bluetooth disarm timeout (1,5,10,20 & 30mins).



Add Speaker

Pair an Anker a3102, 3108 or 3109 Bluetooth speaker with the panel for remote voice announcements, chimes and two-way voice.

FIND IT



SETTINGS



ADVANCED SETTINGS



ENTER CODE (1111, 2222)



INSTALLATION





DEVICES



BLUETOOTH DEVICES


ADD DEVICE

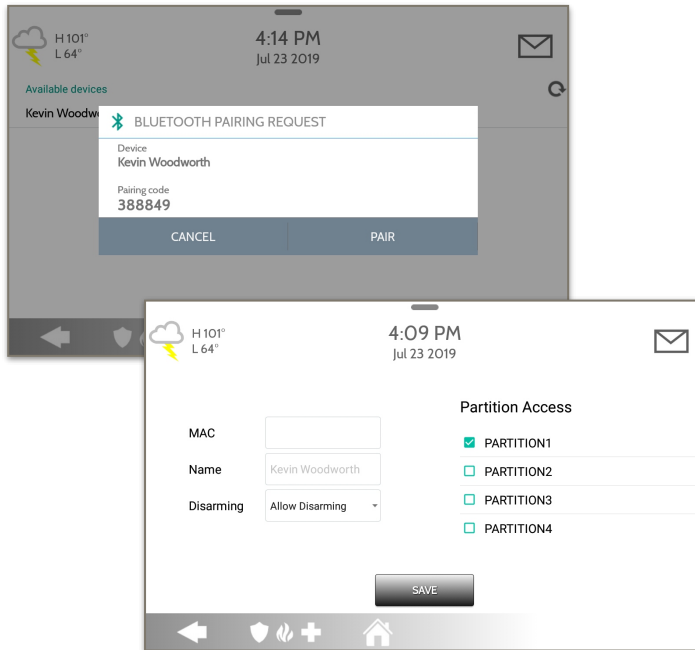



1. Select “Add Device” 
2. Open the Bluetooth page on your mobile device. The panel will search for all available and in range bluetooth devices.
3. Select the correct device from the list on the panel and ensure the pairing code matches that on your mobile device.
4. Touch “Pair” on the panel first, and then on your mobile device.
5. Choose whether to allow disarming or not, and select the Partition to be disarmed (if Partitions are enabled).
6. Your mobile device will now show under the “Paired Devices” list on the panel.

NOTE: Your phone may show the IQ Hub as “Not Connected”. This is normal

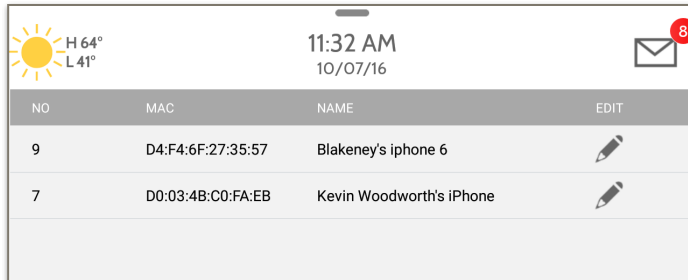EDIT DEVICE




| NO | MAC | NAME | EDIT |
|----|-------------------|--------------------------|---|
| 9 | D4:F4:6F:27:35:57 | Blakeney's iphone 6 |  |
| 7 | D0:03:4B:C0:FA:EB | Kevin Woodworth's iPhone |  |

1. Select the pencil next to the device you would like to edit.

2. Select whether or not you would like to allow a device to disarm the panel when in proximity.

3. Select which Partition you would like the device to disarm.

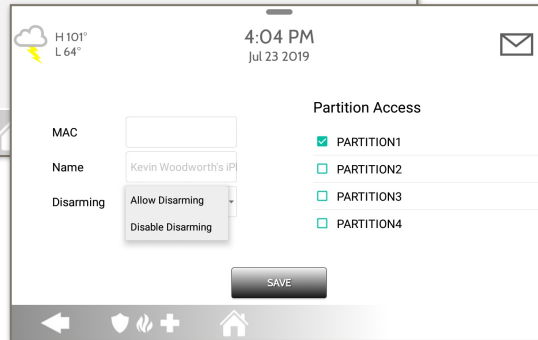

MAC:

Name: Kevin Woodworth's IP


Disarming:

Partition Access

- PARTITION1
- PARTITION2
- PARTITION3
- PARTITION4


Note: This option is only available when “Partitions” are enabled. A device can only be assigned to one Partition at a time.

DELETE DEVICE

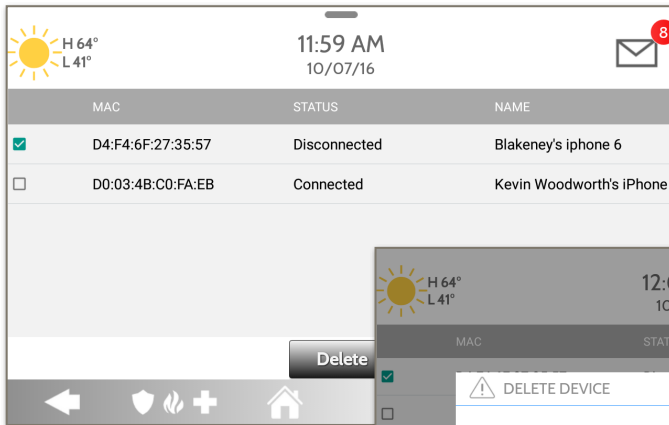


1. Select the check box next to the device you would like to delete.

2. Select "Delete" at the bottom of the page.

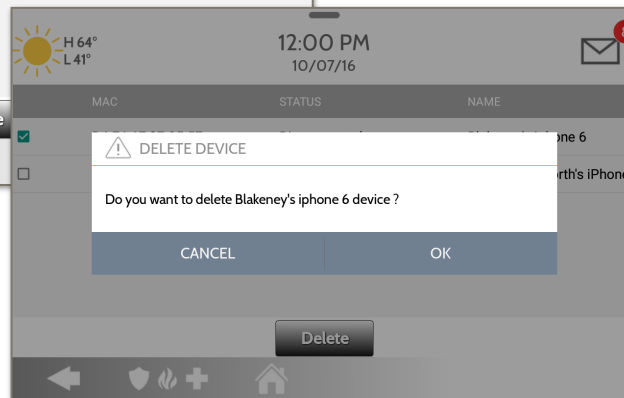

3. Select "OK" to confirm and delete the device.



REMOVE ALL DEVICES

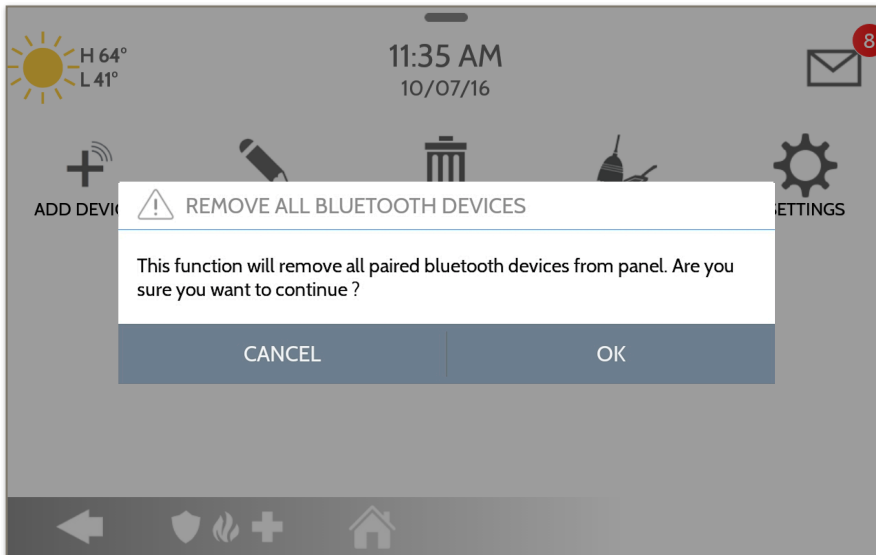

To delete and remove all enrolled Bluetooth devices at once, select “Remove All Devices”.

Next select “OK” to confirm you would like to delete.

SETTINGS

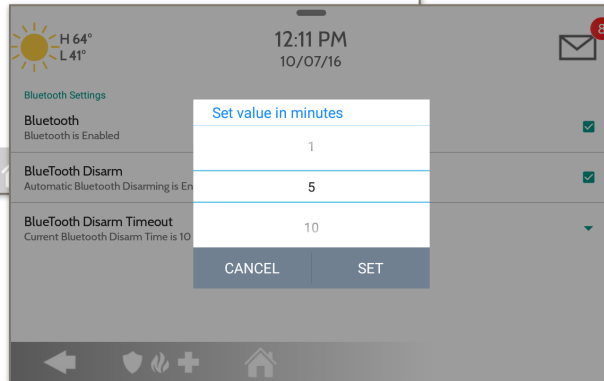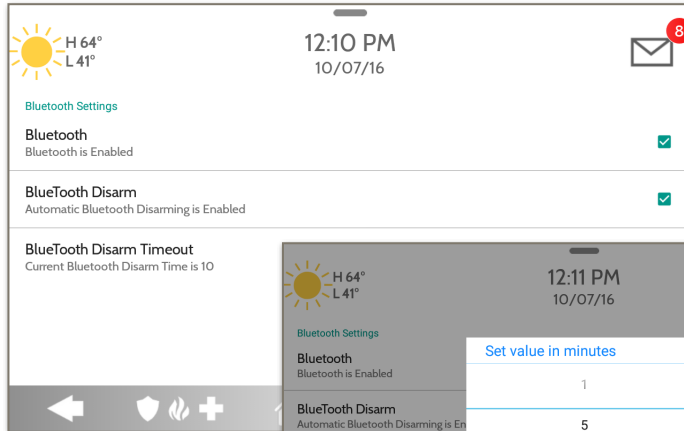

BLUETOOTH:

Select or un-select this box to enable or disable the bluetooth radio.

BLUETOOTH DISARM:


Select or un-select this box to enable or disable the ability to disarm the panel via Bluetooth. To change this on an individual level you must edit the specific device.

BLUETOOTH DISARM TIMEOUT:

Change the time in which the panel must wait after it's been armed to away before it allows a bluetooth device to disarm it. **Default 10 min**

Select from 1, 5, 10, 20 or 30 minute disarm timeout

ADD SPEAKER

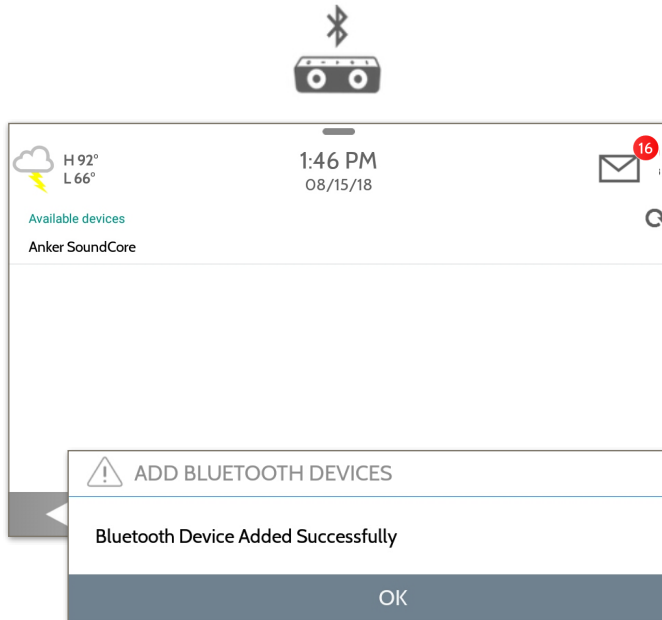

1. Select “Add Speaker”
2. Initiate Bluetooth pairing from the speaker.
3. Touch the correct device from the list on the panel to begin the pairing process.
4. Once paired, a pop up showing “Bluetooth Device Added Successfully” will appear. Touch “OK” to confirm.
5. Your speaker will now show under the “Paired Devices” list on the panel.

NOTE: Only “Anker” brand (models 3102, 3108 or 3109) speakers are supported.

SYSTEM TESTS

SYSTEM TESTS



System Tests

There are many different tests you can perform to ensure the system is working properly.



Wi-Fi Test

Test the panel's connection to the wireless (Wi-Fi) network



Sensor Test

Shows actual dBm signal strength of each sensor and graphs sensor events against the ambient noise floor of the environment



Cellular Test

Test the panel's connection to the cellular network and Alarm.com



Z-Wave Tests


Test communication between devices and the panel. Rediscover network, counters, neighbor info, diagnostics & advanced diagnostics



PowerG Test

Ping and receive signal strength from a PowerG sensor.

FIND IT



SETTINGS



ADVANCED SETTINGS



ENTER CODE (1111, 2222)




SYSTEM TESTS

SYSTEM TESTS



Dual Path Test

Verifies the Wi-Fi path is connecting to Alarm.com



Daughter Cards Test


Tests the integrity of the installed daughter cards



Panel Test

Runs through a complete test of the panel's running processes

FIND IT

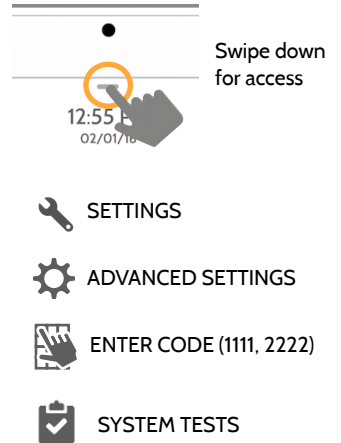


WI-FI TEST




Wi-Fi Test

The Wi-Fi test checks the IQ Hub's connection to your network (router). Before running this test, be sure to connect the panel to the network. See "customization" section for directions on connecting to Wi-Fi.

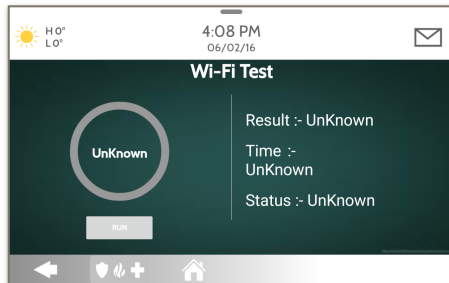


A successful test will result in a "pass" and indicates the date and time of the test along with connection speed.

To perform a Wi-Fi Test, touch the "Run" button.

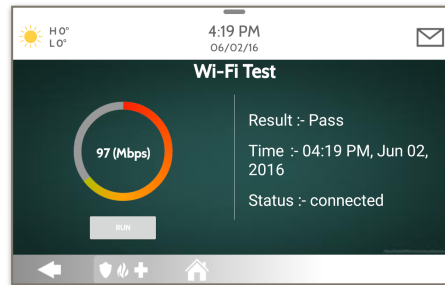

NOTE: If test fails, please check your Wi-Fi settings.

FIND IT

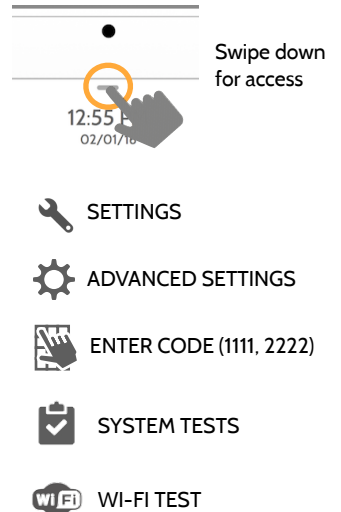

SENSOR TEST



Sensor Test

Shows actual dBm signal strength of each sensor and graphs sensor events against the ambient noise floor of the environment. Also displays the traditional packet count method.


| ZONE | NAME | AVERAGE DBM | LAST EVENT RESULTS (DBM) (PACKETS) | | |
|------|--------------|--------------|------------------------------------|---------------|--|
| 1 | Back Window | Strong (-43) | Strong (-47) | Perfect (16) | |
| 2 | Front Window | Strong (-31) | Strong (-33) | Perfect (8) | |
| 3 | Back Door | Good (-55) | Good (-55) | Excellent (7) | |

Refer to page 99 for the sensor packet results table.

The Advanced Sensor Test shows a summary page of each sensor paired to the panel along with the average dBm level, the last event's dBm level and how many packets were received from the sensor.

Select the graph icon to the right of each sensor to view an individual sensor's graphed signal strength in real time.

FIND IT



- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- SYSTEM TESTS
- SENSOR TEST

NOTE: For UL/cUL, perform a placement test first for all wireless initiating devices. The acceptable result shall be "Excellent".

SENSOR TEST



Noise Floor


From the Sensor Test page select the “Settings” cog to view the “Real Time Noise Floor”. The noise floor represents the dBm threshold at which the panel can no longer sense signals from sensors.

| ZONE | NAME | AVERAGE DBM | LATEST RESULTS (DBM) (PACKETS) | Settings |
|------|------------|--------------|--------------------------------|--|
| 1 | Versa | Strong (-58) | Strong (-61) | Clear All Sensor Data Real Time Noise Floor |
| 2 | Flow | Strong (-62) | Strong (-67) | |
| 4 | Front Door | Strong (-51) | Strong (-59) | |

Lower dBm levels mean there is less noise or interference on the sensor’s specific operating band or frequency.



FIND IT



- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- SYSTEM TESTS
- SENSOR TEST

NOTE: Manufacturer recommended signal to noise ratio is min 7dB


SENSOR TEST

- Colored points on the graph represent each state change or supervisory signal transmitted from a sensor to the panel. Points are colored based on frequency.
- The **YELLOW** line represents a dBm level where signal strength is “Poor” and potential RF failures could occur. This line dynamically adjusts to 12 dBm above the ambient RF noise floor in the environment.
- The **RED** line represents a dBm level where signal strength is “Critical” and RF failures are likely. This line dynamically adjusts to 6 dBm above the ambient RF noise floor in the environment.

TROUBLESHOOTING:

If a sensor falls below the yellow line, try changing its orientation (vertical/horizontal), move the sensor to a different part of the door/window or adjust the panel’s RF pigtail antenna.

Then re-test to see if the result improved.

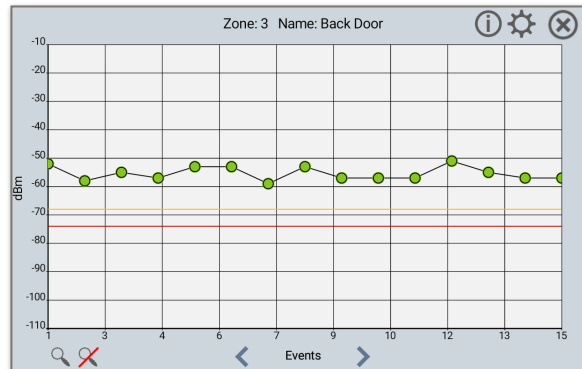

FIND IT

Swipe down for access

12:55
02/01/16

- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- SYSTEM TESTS
- SENSOR TEST


NOTE: Manufacturer recommended signal to noise ratio is min 7dB

CELLULAR TEST




Cellular Test

Test the panel's built-in cellular radio connection. You must first activate the radio through Alarm.com prior to running this test. Cell signal strength is only available after the test has been ran successfully.

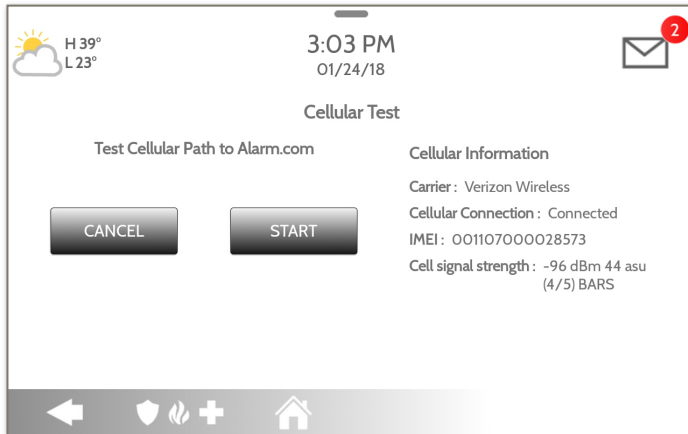

To begin the test press "Start" and watch for the results on the screen.

FIND IT

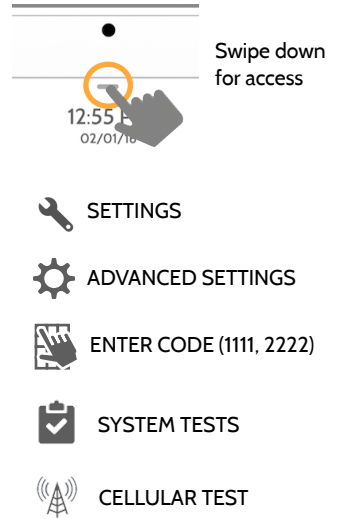

Z-WAVE TESTS



Z-Wave Test


Test the connection between the panel and enrolled Z-Wave devices to ensure they are communicating properly.

To perform a Z-Wave Test, touch the “Run” button. A successful test will result in a “Pass” and a time stamp.

| ID | TYPE | STATUS | TEST TIME | RESULT |
|----|-----------|-------------|-----------|--------|
| 2 | Light | Normal | | Run |
| 3 | Light | Normal | | Run |
| 4 | Door Lock | Unreachable | | Run |

NOTE: If a test fails, relocate device, change batteries and/or rediscover network.

FIND IT

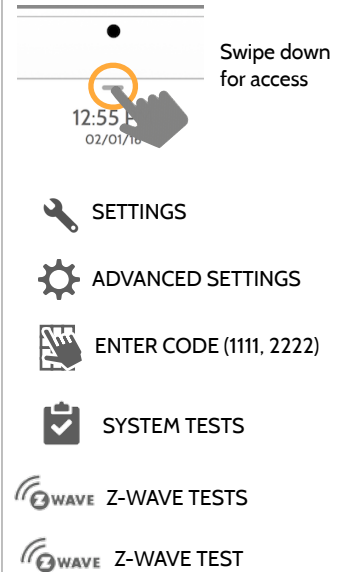


Z-WAVE TESTS



Rediscover Network


After installing or moving a Z-Wave device one should always “Rediscover the Network”. This re-maps the network and ensures all devices have the most efficient communication path leading back to the panel.

Select a single device or all and then select “Rediscover”. A result including a time stamp will appear under “Status”.

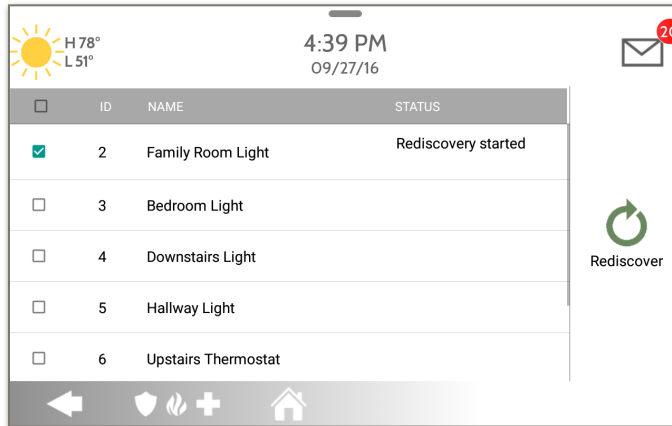

NOTE: If a test fails, relocate device, change batteries and/or rediscover network.

FIND IT



- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- SYSTEM TESTS
- Z-WAVE Z-WAVE TESTS
- REDISCOVER NETWORK

Z-WAVE TESTS



Neighbor Info

Use “Neighbor Info” to view which devices can “see” each other. The more neighbors a device can see means more possible routes back to the controller.

| ID | NAME | NEIGHBOR INFO |
|----|---------------|---------------|
| 2 | Light | View |
| 3 | Bedroom Light | View |
| 4 | Front Door | |
| 5 | Thermostat | |

Neighbor Nodes for Light (5)
4 : front_door

CLOSE

Touch “View” next to any device and a pop-up will appear listing its “Neighbor Nodes”

FIND IT

Swipe down for access

12:55
02/01/16

- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- SYSTEM TESTS
- Z-WAVE TESTS**
- NEIGHBOR INFO

Z-WAVE TESTS

FIND IT



Counters


View a numerical representation of the Z-Wave network. View failed and acknowledged commands as a whole or from an individual device. A well designed network should have at least a 98% acknowledgment vs failed rate.

The screenshot shows two overlapping mobile app screens. The background screen displays a summary of Z-Wave command statistics:

- Acked commands no auto route : 0
- Acked commands auto route : 5434
- Failed commands no ack : 1
- Failed commands network failed : 0
- Failed commands network not idle : 0
- Failed commands network no route : 0

A 'RESET ALL' button is visible at the bottom of this screen. The foreground screen shows a table of device statistics:

| ID | NAME | PASSED | FAILED | RESET COUNTERS |
|----|-----------|--------|--------|----------------|
| 3 | Light | 2921 | 0 | Reset |
| 4 | IO Outlet | 2521 | 1 | Reset |



- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- SYSTEM TESTS
- Z-WAVE Z-WAVE TESTS
- COUNTERS

Z-WAVE TESTS


| COUNTER | DESCRIPTION |
|--------------------------------|--|
| Acked commands no auto route | Command was successful and acknowledged by the sensor; it did not use the normal automatic Z-Wave network route to execute the command for this device (command was re-routed on the Z-Wave network in order to succeed) |
| Acked commands auto route | Command was successful and acknowledged by the sensor; it used the normal automatic Z-Wave network route to execute the command for this device. |
| Failed commands network failed | Not possible to transmit data because Z-Wave network is busy (jammed). Command failed to execute. |
| Network failed | Not possible to transmit data because Z-Wave network is busy (jammed). Command failed to execute |
| Network not idle | Auto-routed command failed because Z-Wave network is not yet stable. Command failed to execute. |
| Network no route | Auto-routed command failed because there is no successful Z-Wave network route to the device. Command failed to execute |
| Reset All | Resets all counters back to 0 as to better diagnose the network |
| Details | Shows individual device details such as passed and failed commands. Here you can also reset an individual device's counter |

Z-WAVE TESTS




Z-Wave Diagnostics

View a graphical representation of the installed Z-Wave network. View the network's or an individual device's last known working route. Use the Key chart to decipher which devices are repeating nodes, have a strong or weaker signal or perhaps need to be moved to another location.

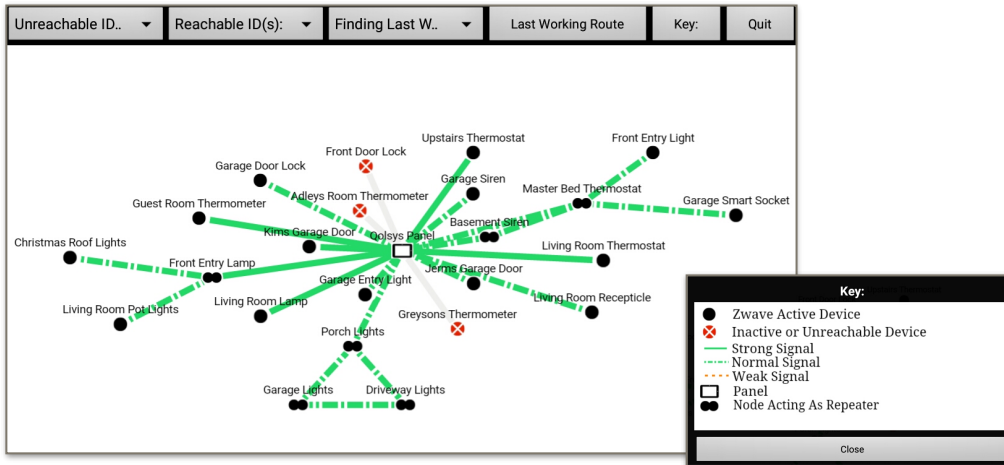

FIND IT




- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- SYSTEM TESTS
- Z-WAVE Z-WAVE TESTS
- Z-WAVE DIAGNOSTICS

Z-WAVE TESTS



Advanced Z-Wave Diagnostics

Advanced Z-Wave diagnostics gives access to Network Health Test, Repeater Test & Last Working Route.

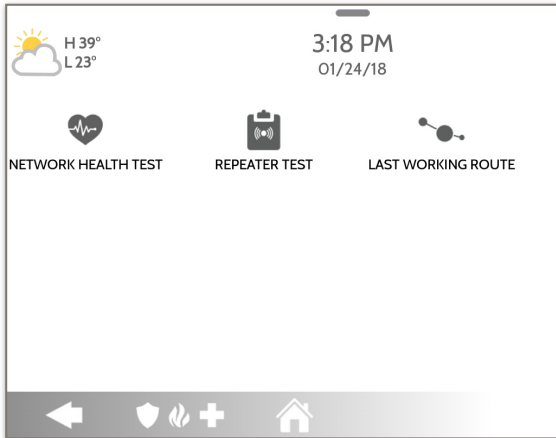

Network Health Test

Shows the minimum, maximum & average node response times on the network



Repeater Test


Tests the connection to dedicated Z-Wave repeaters on the network



Last Working Route

Shows the last working route for a specific node on the network. Also allows you to set a static “sticky” route

FIND IT

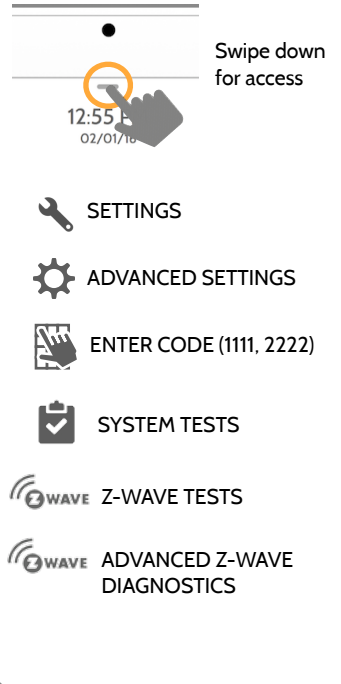

POWER G TEST



PowerG Test

Ping a PowerG sensor and receive back its signal strength. You can view the average signal strength over 24hrs as well as review the PowerG PIR CAM image.

| NO | ID | NAME | STRENGTH | | |
|----|----------|----------------|----------|---------|------|
| 9 | 241-0553 | Basement Flood | Strong | Run | More |
| 11 | 140-2234 | PowerG Motion | Strong | Testing | |

Sensor Signal Info [RUN]


Sensor: PowerG Motion (11)
 Current Strength: **Strong**
 24 Hrs Strength: Not Available
 Last Updated: 01:44 PM, Aug 06, 2018
 Repeater: Not Applicable

[TEST LED] [TEST PICTURE]

STRENGTH can be: Strong, Good, Poor or No Signal

Note: for UL/cUL signal strength shall be "Strong"

FIND IT




- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- SYSTEM TESTS
- POWERG TEST

*PowerG daughter card must be installed in the panel to access this test.

DUAL PATH TEST



When enabled, dual path connectivity allows the IQ Hub to use both cellular and Wi-Fi radios for signals and communication simultaneously.

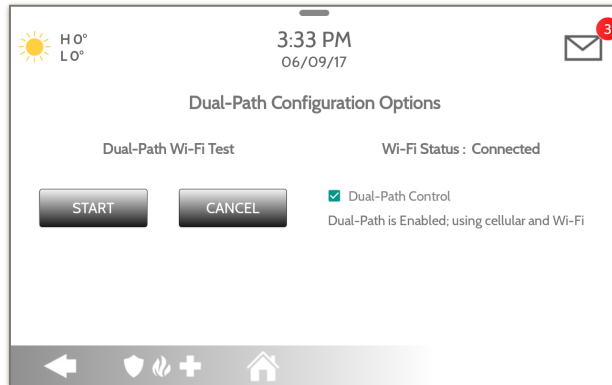


By default Dual-Path Control is enabled. To disable, “un-check” the box.

You can also run a Dual-Path Wi-Fi test to ensure that the Dual Path is connecting properly. Unlike the standard Wi-Fi test (which checks connection to the router) the panel will check the broadband connection to Alarm.com.

NOTE: The IQ Hub must be connected to a wi-fi network to enable Dual Path

NOTE: IQ Hub is compatible with the following UL/ULC listed monitoring station receivers: SG-System I/II/III/IV/5. Wi-Fi is for supplemental use only for UL/cUL

FIND IT

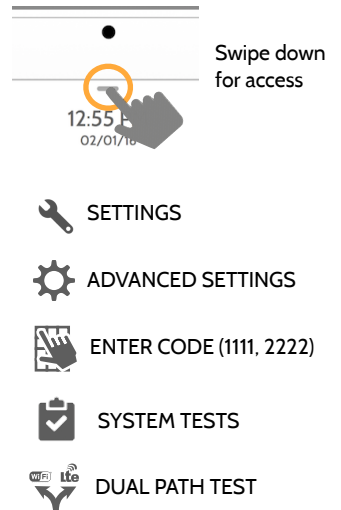


DAUGHTER CARDS TEST




Daughter Cards Test

Tests the integrity of installed daughter cards . Slots not populated will be “greyed” out and inaccessible to test.

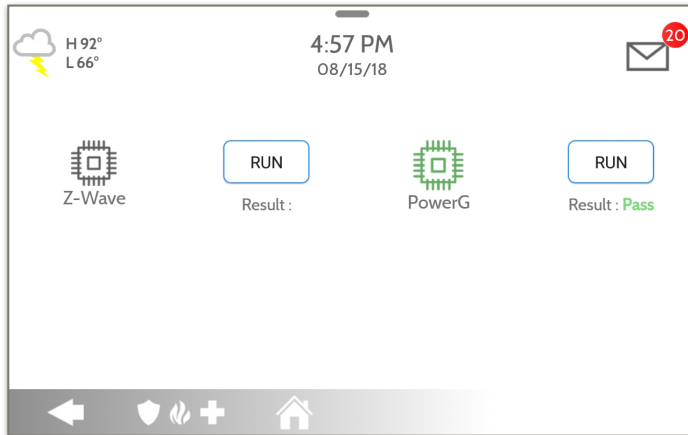

Select “Run” on an individual available card to start the test. In some cases the test may take several minutes after which the panel will show a result of a “Pass” or “Fail”.

FIND IT

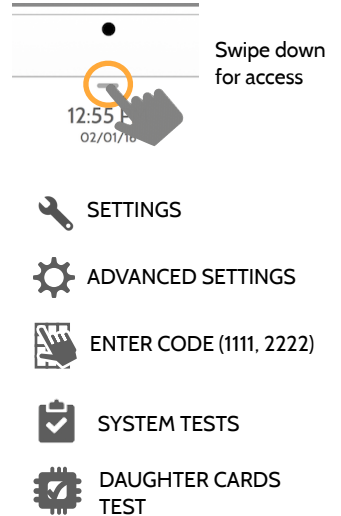


PANEL TEST



Panel Test

Runs through and tests all panel processes either all at once or one at a time.

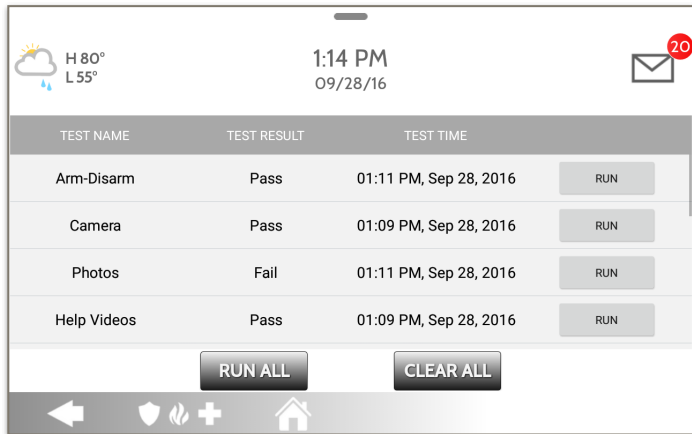


Select “Run” to perform an individual test or “Run All” to perform a test of all processes.

Running all tests at once will sound the siren.

Note: The Siren can be tested alone under the Panel Test menu, scroll down and select RUN

FIND IT

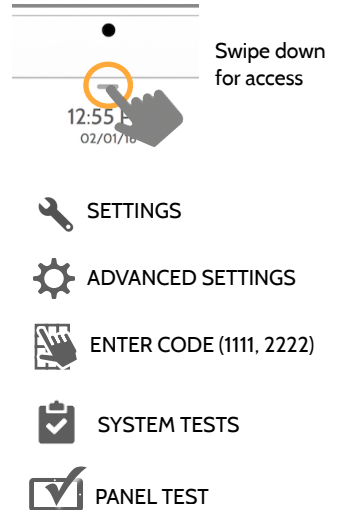

CUSTOMIZATION


USER MANAGEMENT



The IQ Hub can hold up to 242 user codes. Only Dealer, Installer and Master user codes can create or edit user codes. Once a code is created, all information can be edited, except for the “User Type”.

| User Type | Access Level | Partition Access |
|-----------|--|---|
| Dealer | All settings as well as Master Reset and access to change Dealer Contact information | All Partitions |
| Installer | All Settings | All Partitions |
| Master | All user-related features and Settings, including connecting to Wi-Fi, User Management, Sound App and Sensor customization | All Partitions |
| User | Arming/Disarming | A user may only access their assigned partition |
| Guest | Arming/Disarming | A user may only access their assigned partition |
| Duress | Disarming (but sends duress signal to security provider). | Each partition gets a unique Duress Code |

FIND IT

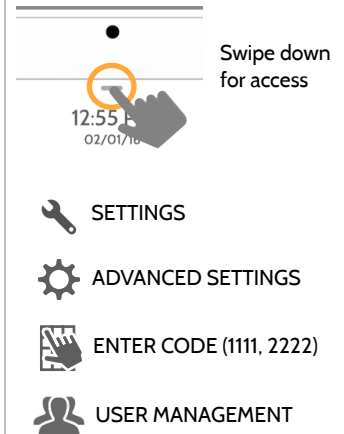

NOTE: When “6 Digit User Code” is ENABLED a “00” will be appended to all existing 4 digit codes

DEALER BRANDING*



Dealer Branding

Here you can customize the Dealer Contact info.



Contact Info


Edit Dealer Name, Email,
Phone #, Zip Code, Website
and Tag lines



On-Screen Branding

Load a Custom Logo, Dealer
Billboard images or add/
replace Help Videos via the
Panel Access Point

FIND IT

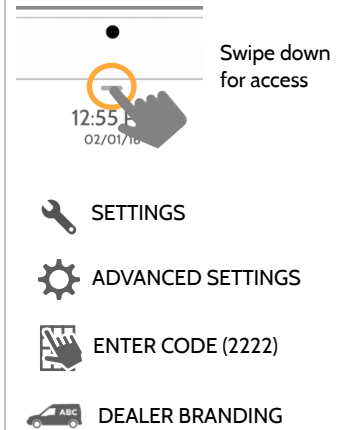

*This page available only through the
Dealer Code


DEALER BRANDING*

FIND IT



Contact Info

Customize your contact info and determine what you'd like to be displayed in "Contact Us", located on the right side of the "Home Screen" header. Dealer Contact fields allow up to 50 characters, Tag Line 2 allows up to 50.

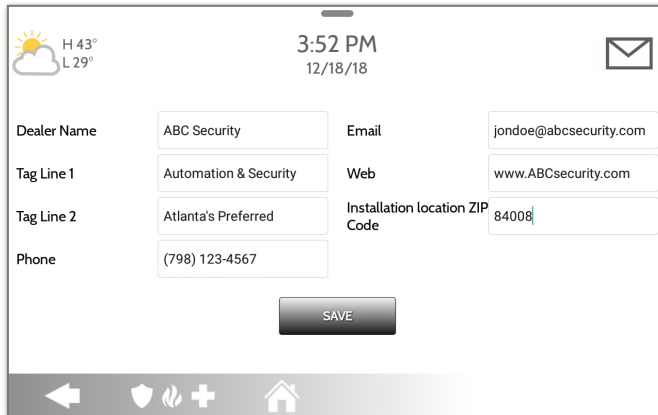


The screenshot shows a mobile app interface for editing contact information. At the top, there is a weather widget (H 43°, L 29°), a clock (3:52 PM, 12/18/18), and an envelope icon. Below this are several input fields:






- Dealer Name: ABC Security
- Tag Line 1: Automation & Security
- Tag Line 2: Atlanta's Preferred
- Phone: (798) 123-4567
- Email: jondoe@abcsecurity.com
- Web: www.ABCsecurity.com
- Installation location ZIP Code: 84008

A "SAVE" button is located at the bottom of the form. At the very bottom of the screen is a navigation bar with icons for back, shield, plus, and home.

Example:

ABC Security
Automation & Security
Atlanta's Preferred
798-123-4567
jondoe@abcsecurity.com
ABCSecurity.com
84008



-  SETTINGS
-  ADVANCED SETTINGS
-  ENTER CODE (2222)
-  DEALER BRANDING
-  CONTACT INFO


*This page available only through the Dealer Code

DEALER BRANDING*



On-Screen Branding

Load a Custom Logo, Dealer Billboard images or add/replace Help Videos via the Panel Access Point. Dealer Billboard (photo frame) images cannot be deleted by an end user.

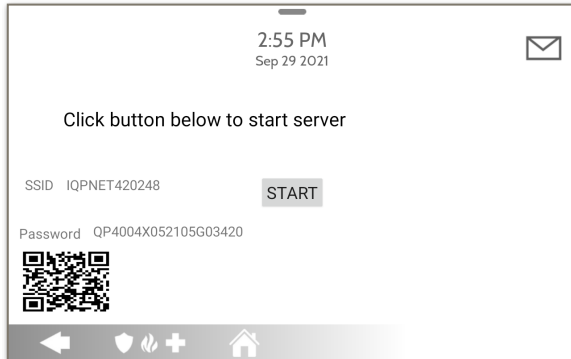


1- Scan the QR Code with your phone camera or manually connect to the Panel AP with the SSID and Password shown on the screen.

2- Press "Start" to begin the local server session, then from your device scan the second QR code or navigate to the "https" site shown on the Panel screen.

3- Follow the prompts on your device screen to select the correct files and transfer them to the Panel.

FIND IT

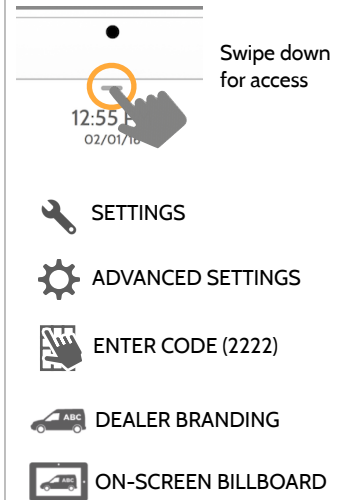

*This page available only through the Dealer Code

CONNECTING TO WI-FI



To connect to a Wi-Fi network, follow the steps below:

Swipe down from the top menu bar and select settings.



Touch Advanced Settings (Installer Code)



Then touch “Wi-Fi”



Enable Wi-Fi if not already active

Available networks appear in a list. Touch the desired network and use the keyboard to type the password (if required)

Activate WIFI



Qolsys-5G
Connected



Now Communications



Qolsys



Sunset Room




Vertical Ops 2.4



Add wi-fi network

FIND IT

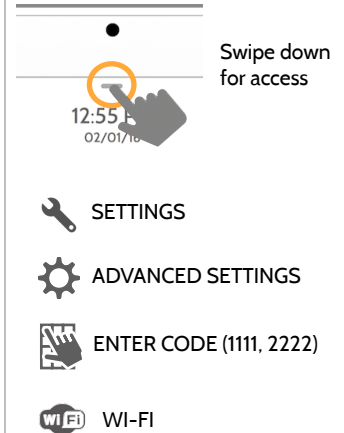


WEATHER



H 36° L 20°

TODAY'S FORECAST

Today's forecast is displayed on the weather icon with a graphical representation of precipitation and High and Low temps.

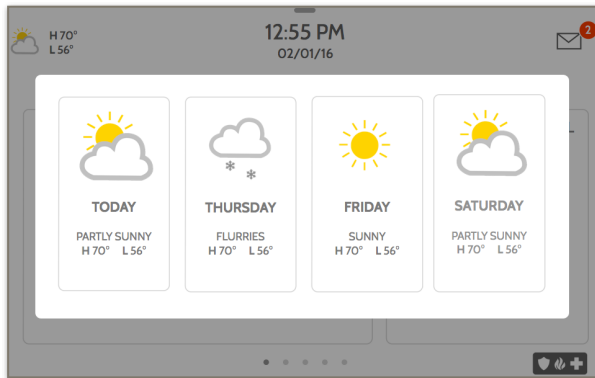


4-DAY FORECAST

Touch the weather icon to get a 4-day forecast. This information is updated once daily via Alarm.com services. (Will not display or update weather connected to wifi only)

LOCATION

Weather reporting is based on location as indicated by the zip code entered into Alarm.com when the account is created.

FIND IT




Touch the weather icon in the upper left corner of the header to reveal a 4 day forecast

PHOTO FRAME



PHOTO FRAME

The IQ Hub can be set to display digital photos when not in use. This feature, called “Photo Frame”, can be changed or turned off through “Photo Frame Settings”. (Swipe down from the menu bar).

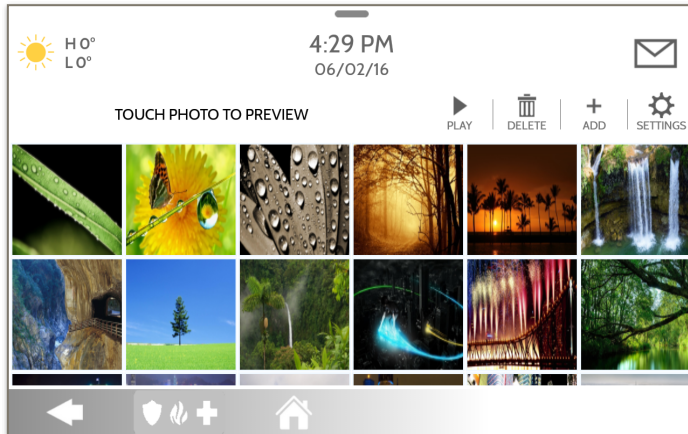

Display type
Choose a display type for your photo frame. Opt to turn it off completely, scroll through pre loaded images or view a “weather clock”

FIND IT




PHOTO FRAME APP BUTTONS



PLAY

PLAY: Starts Photo Frame immediately. Good for testing photo frame feature appearance and transitions



DELETE

REMOVE PHOTOS: Allows you to remove photos one by one or all at once



ADD

ADD PHOTOS: Download one of several “Wi-Fi” photo sets using your panel’s WiFi connection. Android phones only can also transfer photos directly over bluetooth.



SETTINGS

SETTINGS: Change the Photo Frame’s “Display Type” from Off to On or enable a “Weather Clock” screen saver. Change transitions, adjust display time, set automatic on/off times and more

FIND IT





PHOTO FRAME SETTINGS

FIND IT

| Item | Default | Description |
|---------------------------|-------------|--|
| Duration | 1 minute | How long each image will show before transitioning to the next image in the library (1, 2, or 5 minutes) |
| Effect | Dissolve | Transition effect used between each image (fade to black, dissolve) |
| Shuffle | Enabled | Display pictures in random or sequential order |
| Display Type | Photo Frame | Choose what to display on the screen when the panel is not in use. (Off, Photo Frame and Weather Clock) |
| Photo Frame Start Time | 10 minutes | Choose the amount of time to wait after the last touch before starting the selected display type. (1, 5, 10, 15, 20, 25, or 30 minutes) |
| Nighttime Mode Start Time | 11:00 PM | Determines the time when the display, voices or chimes shutdown completely. (Use this feature to turn off the LCD, voices and/or chimes at night) |
| Nighttime Mode End Time | 6:00 AM | Determines the time when the display, voices or chimes "wake up" after sleeping. (Use this feature to turn the LCD, voices and/or chimes back on in the morning) |
| Nighttime Mode Settings | Display | Choose what the Nighttime Mode Start/End times have the ability to control (Display, Voices and/or Chimes) |

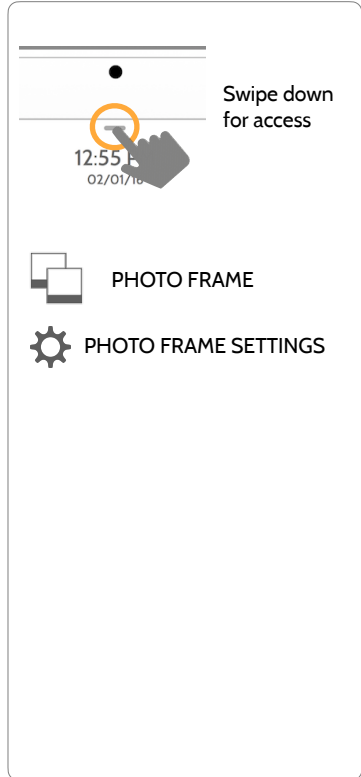

MAINTENANCE

UPGRADE SOFTWARE




Upgrade Software

Upgrade the panel's software version using Wifi.

| Setting | Description |
|---|---|
| Upgrade Using Network | Search the network for updates and install new software NOTE: For UL/cUL, remote software uploading is not allowed |
| Upgrade Using Access Point | Connect to the Panels' built-in Access Point to install new software |
| Patch Tag | A code corresponding to a specific software update on the server |
| Automatic Background Check and Download | Allows the panel to check for new software in the background and download it to local storage so that it can be applied at a later date. Default Enabled |
| Automatic Check Interval | Determines interval the IQ Hub will look for software update. Available options are Every Night, Once a Week, Once a Month. Default Once a Week |

FIND IT

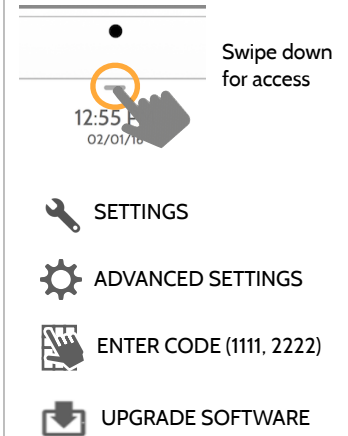

NOTE: Proper maintenance requires prompt administration of any software updates


UPGRADE SOFTWARE USING WI-FI

Keeping your panel up to date is essential in ensuring it receives the newest features and is free from bugs.

To perform a software update using Wi-Fi follow the steps below:

- 1- Ensure your panel is connected to Wi-Fi and has an internet connection.
- 2- From the drop down menu select "Settings" then "Advanced Settings". (Installer/Dealer Code)
- 3- Touch "Upgrade Software"
- 4- Touch "Upgrade Using Network" The IQ Hub will check for the latest software update. If your panel is up to date you will see a message confirming that you have the most recent software version.
- 5- If a software update IS available the panel will automatically begin downloading it.
- 6- Once the download is complete a pop up message will appear informing you that in order to install the software you must restart the panel. Touch "OK." Your panel will install the update and automatically restart.

FIND IT

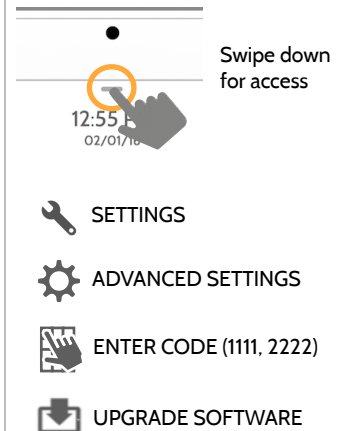


NOTE: For UL/cUL the remote software feature shall not be used and the panel shall not be setup to remotely upgrade.

UPGRADE SOFTWARE USING ACCESS POINT


Most updates are downloaded over Wi-Fi, but in the event that Wi-Fi is not present at the installation site, a Panel can be updated with files transferred from a local device (phone, tablet, computer, etc) via the built-in Panel Access Point.

To perform a software update using the Panel Access Point follow the steps below:

- 1- Download the needed software update files from the Dealer Portal to your device (phone, tablet, computer).
- 2- Go to Settings/Advanced Settings/Upgrade Software then touch “Upgrade Using Access Point”.
- 3- Scan the QR Code with your phone camera or manually connect to the Panel AP with the SSID and Password shown on the screen.
- 4- Press “Start” to begin the local server session, then from your device scan the second QR code or navigate to the “https” site shown on the Panel screen.
- 5- Follow the prompts on your device screen to select the correct files and transfer them to the Panel.

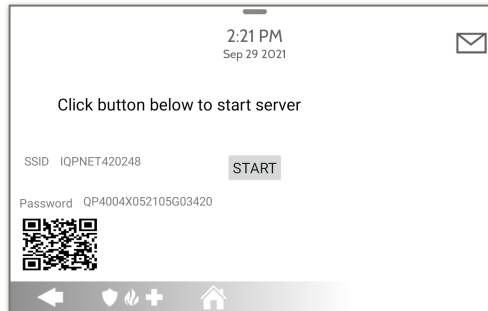

FIND IT

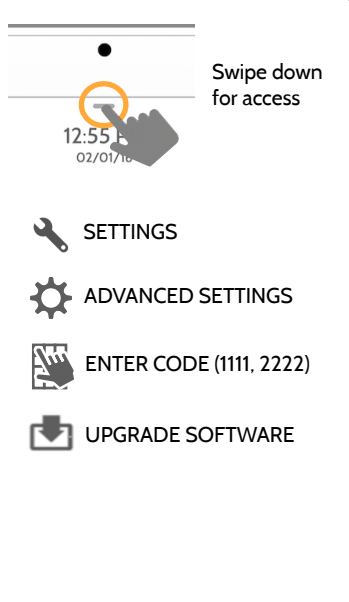

Swipe down for access

- SETTINGS
- ADVANCED SETTINGS
- ENTER CODE (1111, 2222)
- UPGRADE SOFTWARE

NOTE: For UL/cUL the remote software feature shall not be used and the panel shall not be setup to remotely upgrade.

AUTOMATIC BACKGROUND CHECK AND DOWNLOAD

Turning on Automatic Background Check & Download enables the panel to check for a new software version based on the Automatic Check Interval (default is Once a Week).

From the drop down menu select "Settings"

"Advanced Settings". (Installer/Dealer Code)

Touch "Upgrade Software"


Make sure the "Automatic Background Check and Download" button is checked.

Change update interval by selecting "Automatic Check Interval"




QUESTIONS? Contact us at techsupport@qolsys.com

FIND IT

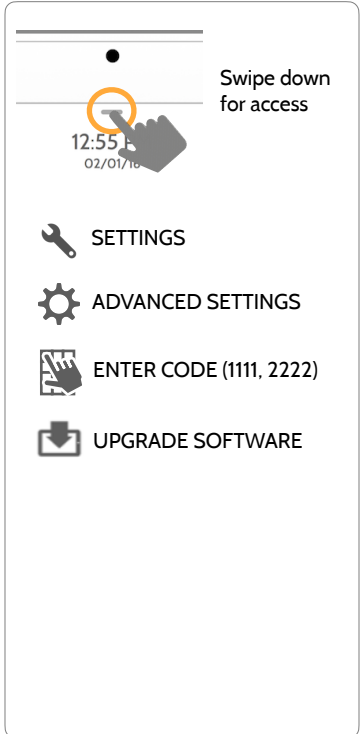

BATTERY REPLACEMENT

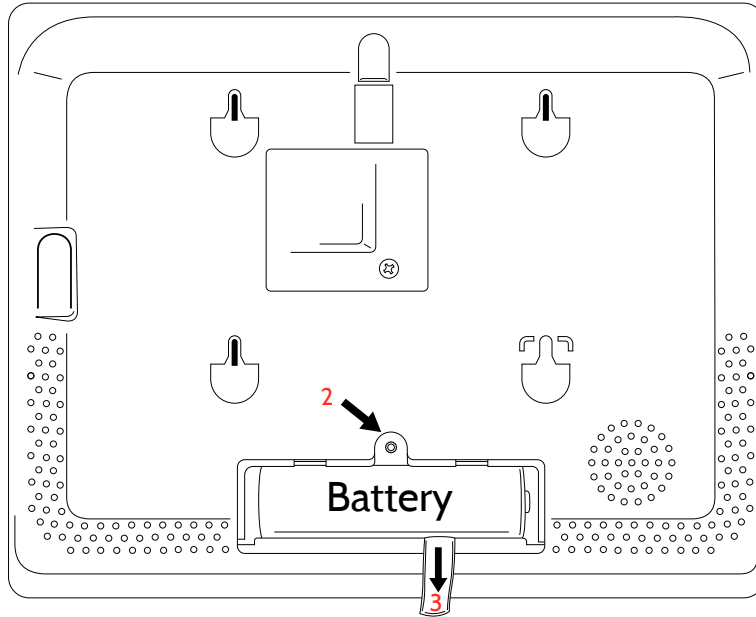


1. **Power down panel:** Go to Advanced Settings and enter the Installer/Dealer/Master code, then select “Power Down”
2. **Remove Battery Door:** Remove the panel from the backplate or table stand and then use a small screwdriver to remove the plastic door covering the battery.
3. **Remove Battery:** Pull the fabric tab that is located under the battery to remove it from the panel.
4. **Install New Battery:** Install the new battery paying careful attention to polarity and being sure to place the fabric pull tab under the battery to make future removal easier.

Re-install Battery Door and screw, then re-mount to backplate or table stand.


CAUTION: Do **NOT** use a screwdriver or anything sharp that could puncture the battery.

TROUBLESHOOTING

ABOUT

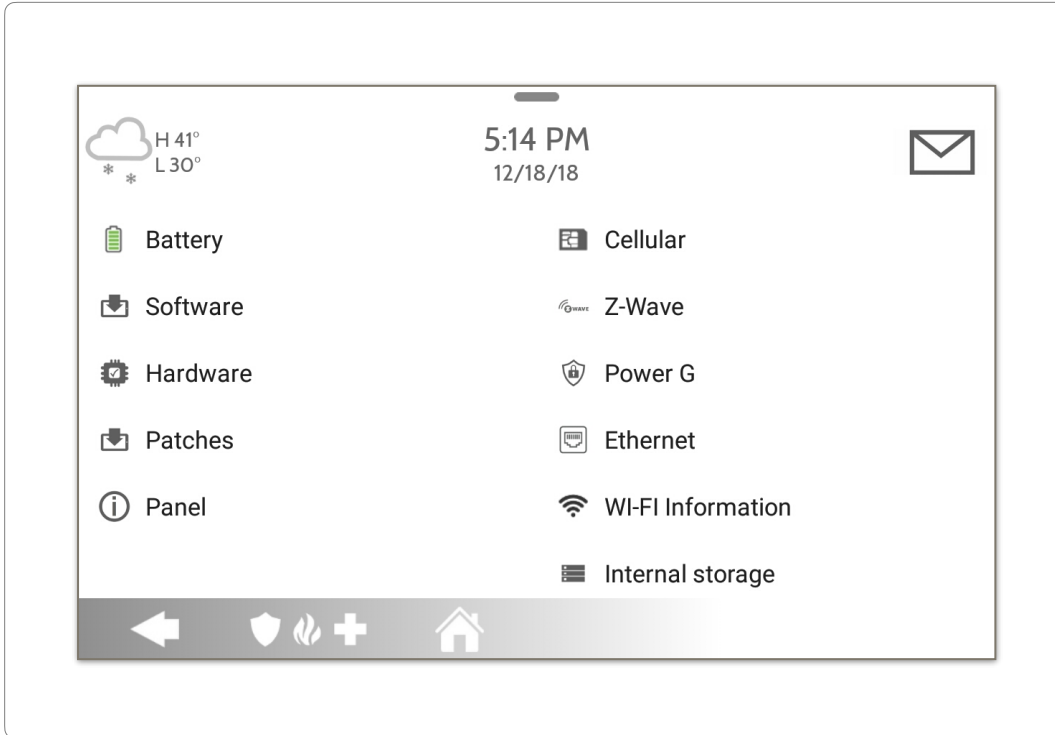

FIND IT

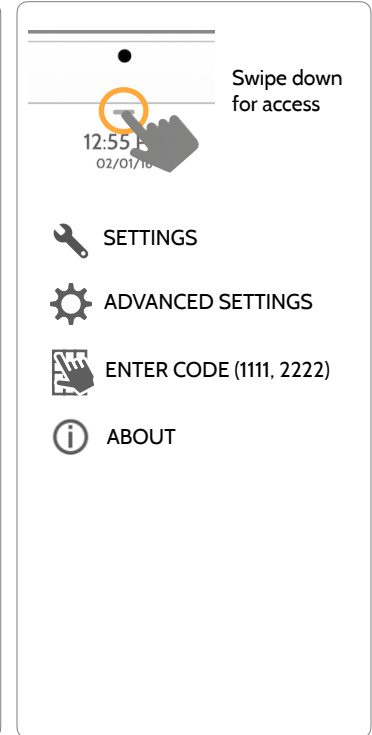

ABOUT

| Item | Description | |
|----------|--|--|
| Battery | Battery Status: Disconnected, Charging, Full | Battery Level: Displayed in % |
| Software | Software Version: Current Software Version Build Number: | Linux Version: Android Version: |
| Hardware | Hardware Version: Manufacturer: Qolsys Inc. San Jose, CA PCA Serial #: Part #: System Configuration: | System Serial #: RF PIC Version: EEPROM Format Version: |
| Patches | Patch Description: Details of all previous patches applied | Last Upgrade Date: |
| Panel | MAC Address: | Panel Up Time: |
| Cellular | Carrier: Current Carrier Cellular Connection: no signal, registered etc.. Cellular Signal Strength: x/6 bars, (xx/xx) internal IMEI: Alarm.com radio number | IMSI: Carrier Sim Information ICCID: Carrier Sim Information Baseband Version: Configuration Version: |

ABOUT

| Item | Description | |
|-------------------|--|--|
| Z-Wave | Home ID: Z-Wave Firmware Version: Z-Wave API Version: | Manufacturing ID: Product Type: Product ID: |
| PowerG | Modem Firmware Version Modem Build Number Radio Firmware Version | Radio Software ID PowerG RF Band |
| Wi-Fi Information | Connection: Connected/Disconnected IP Address: Panel's IP Address when connected SSID: Network panel is connected to | Speed: Connection speed shown in Mbps Internet: Can the panel communicate outside the home. Available/Unavailable |
| Internal Storage | Total Space: Total space shown in GB Available Space: Space available for media Photos: Breakdown of space used for photos | Videos: Breakdown of space used for videos Logs: Space used for storing panel logs |

POWER DOWN

DO NOT remove all power without following the steps below. In the event of needing to move the panel from one location to another it is safe to unplug the power supply while leaving the battery plugged in.


1. From the drop down menu select “Settings”.
2. Select “Advanced Settings” then enter your installer code
3. Select “Power Down”
4. Wait for panel LED to turn off
5. Disconnect the power

IMPORTANT: Failure to perform these steps in the proper sequence may result in data corruption and/or panel failure.



QUESTIONS? Contact us at techsupport@qolsys.com

FIND IT

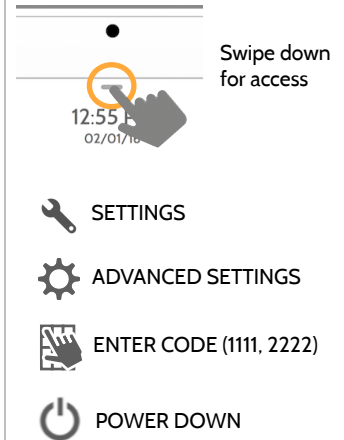

PANEL REBOOT

If the panel is experiencing difficulties you can often resolve it by resetting the operating system.


1. From the drop down menu select “Settings”.
2. Select “Advanced Settings” then enter your installer code
3. Select “Panel Reboot”
4. Wait for the panel to restart

IMPORTANT: Failure to follow these steps properly may result in data corruption and/or panel failure.




QUESTIONS? Contact us at techsupport@qolsys.com

FIND IT

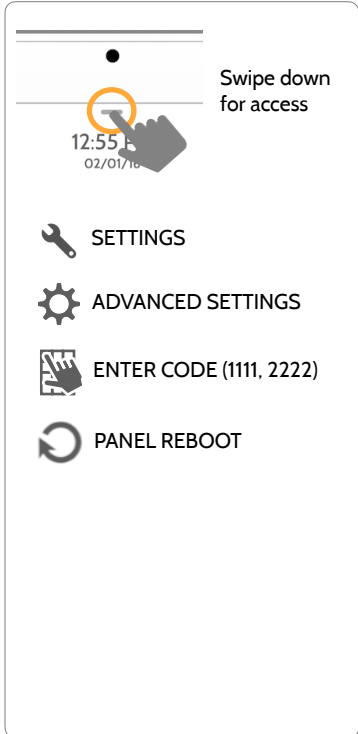

HARD REBOOT

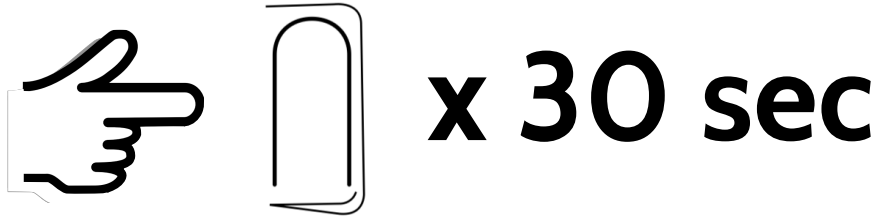

IMPORTANT: Performing a hard reset may result in data corruption and/or panel failure. Only use this when absolutely necessary.



QUESTIONS? Contact us at techsupport@qolsys.com

PANEL TEST TROUBLESHOOTING

If you run a panel test and it fails, use the following steps to fix the issue.

| Test | Description | If fails: |
|---------------|--|--|
| Arm-Disarm | Tests the arm/disarm operation | Reboot panel, run test again then if necessary perform a master reset and repeat test |
| Photos | Checks that photos are loaded in the photo frame app | 1) Go to Settings -> Photo Frame -> Add Photos 2) Add photos from Wifi photo sets |
| Help Videos | Checks help videos are installed in the panel. | |
| Battery | Checks panel battery health | 1) Make sure the battery is connected 2) If test continues to fail, replace the battery |
| LED Green/Red | Check panel LED operation | 1) Reboot the panel and run the test again 2) Master reset and repeat test |

PANEL TEST TROUBLESHOOTING

| Test | Description | If fails: |
|---------------------|---|--|
| Panel Tamper | Check panel Tamper state | <ol style="list-style-type: none"> 1) Check to ensure backplate is secure and installed properly. 2) Repeat test. |
| AC Status | Check panel AC power status | <ol style="list-style-type: none"> 1) Inspect the wire leads are secure and properly connected. 2) Repeat test. |
| Internet Connection | Check panel's Internet connectivity | <ol style="list-style-type: none"> 1) Go to Wifi Setting page, Enable Wifi and connect to a Wifi Network 2) Make sure Internet is available on the home router. You can check internet information in the "About" section. 3) Contact your network service provider on continued internet connectivity failure. |
| Wi-Fi | Tests whether panel is connected to Wifi network | <ol style="list-style-type: none"> 1) Go to Wifi Setting page and enable wifi. 2) Connect to a Wifi Network |
| Upgrade Service | Checks that the panel can receive updates from the Qolsys servers | <ol style="list-style-type: none"> 1) Verify internet and Wi-Fi connections. |
| Z-Wave | Check panel's Z-Wave module operation | <ol style="list-style-type: none"> 1) Reboot the panel and repeat test. 2) Master reset and repeat test |
| Sirens | Check that the panel's siren is functioning properly (Burglar, Auxiliary, Fire & CO). | <ol style="list-style-type: none"> 1) Verify the siren is plugged in |

LEGAL

UL/cUL RESIDENTIAL FIRE & BURGLARY INSTALLATIONS

This product has been tested and found in compliance with the following standards: UL1023 Household Burglar-Alarm System Units, UL985 Household Fire Warning System Units, ULC-S545 Residential Fire Warning Systems Control Units and ULC-S304 Security Level I Control Units, Accessories and Receiving Equipment for Intrusion Alarm Systems. For ULC Installations refer to the Standard for the Installation of Residential Fire Warning Systems, CAN/ULC-S540:

- Use only the compatible power supply referenced in this Installation Manual. 24 h standby power must be provided for fire applications and 4h for burglary only applications (AC trouble must be transmitted to SRC within 60 minutes).
- Priority of signals on the Panel is set as Fire, CO, Burg, Panic, Aux and then Flood.
- Use at least one compatible listed Smoke Detector for Fire Installations.
- The entry delay shall not exceed 45 sec (UL) and 180 sec (ULC Security Level 1).
- The exit delay shall not exceed 120 seconds (UL).
- The control panel supports the Temporal 3 pattern for fire alarm notification
- Test transmission cycle shall be set for 7 days transmission for Residential Fire applications, or 30 days for Residential Burglary only applications.

Note: For ULC Residential Fire and Burglary (ULC-S304 Level I) installations set for daily test transmission, Wireless Supervision window shall be set to 4 hours for UL/ULC Residential Fire Installations. Wireless Supervision window shall be set to 24 hours for Residential Burglary Installations only. RF Jam detection shall be enabled.

For UL 985 6th Ed. Compliant installations using also the Wi-Fi connection, ensure Power for network equipment such as hubs, switches, routers, servers, modems, etc., is backed up or powered by an uninterruptible power supply (UPS), standby battery or the control unit, capable of facilitating 24 h standby.

UL/ULC COMMERCIAL BURGLARY INSTALLATIONS

This product has been tested and found in compliance with the following standards: UL2610 Central Station Burglar-Alarm Units and ULC-S304 Control Units, Accessories and Receiving Equipment for Intrusion Alarm Systems, Security Levels I-II.

The subscriber control unit shall provide for the connection of protective wiring, conductors, and attachments in accordance with the Standard for Installation and Classification of Burglar and Holdup Alarm Systems, UL 681 in USA and in accordance with ULC-S301, CSA C22.1, Canadian Electrical Code, Part I, Safety Standard for Electrical Installations and ULC-S302 Standard for the Installation, Inspection and Testing of Intrusion Alarm Systems, in Canada.

Note: The product is not intended for installation outdoors or outside the protected premises.

This product is UL/ULC listed under the following categories: AMQE/AMCX7 Central Stations Alarm Units, UTOU/UTOU7 Control Units and Accessories, Household System Type NBSX/NBSX7 Household Burglar Alarm System Units. For further information on this product's listings please also refer to the official listing guides published at the UL website (www.ul.com) under Online Directory Section.

Programming:

The notes in the Installation Manual describing the system configurations for UL/uLC listed installations shall be implemented. RJ Jam detection shall be enabled. Panel Siren is for supplementary use.

Use only PowerG sensors listed in "Supported PowerG Sensors" on page 176 of this installer manual for UL/ULC Commercial Burglary installations. Hardwire input zones cannot be used in UL/ULC Commercial Burg installations. Partitions have not been evaluated for UL/ULC Commercial Burg installations. Require valid user code to arm this system must be enabled.

UL/ULC COMMERCIAL BURGLARY INSTALLATIONS continued...

UL2610 Central Station with Standard or Encrypted Line Security Service and ULC-S304 Security Level I-II/A3 Active communication channel:

- The installation must use the integral cellular communicator, which sends events over Cellular Data Network to the compatible Sur-Gard System I/II/III/IV/5 receiver.
- The communication path supervision window is set to 180s with 90s heartbeat and the compromise detection takes place within 3 minutes. The panel is using encrypted line security AES256. NIST certificate A1552.
- Wireless Supervision window shall be enabled and set to 4hours
- Open/Closing acknowledgment shall be enabled
- For ULC-S304 compliant installations using also the Wi-Fi connection, ensure Power for network equipment such as hubs, switches, routers, servers, modems, etc., is backed up or powered by an uninterruptible power supply (UPS), standby battery or the control unit, capable of facilitating 24 h standby.
- The entry delay shall not exceed 60s (UL) and 60s (ULC Security Level II).
- The exit delay shall not exceed 60s (UL) and 45s (ULC Security Level II).

Note: For UL certified Commercial Burglary Central Station applications the IQ Hub provides an acknowledgment signal to the user interface to confirm that normal closing signal has been received once the system has been armed. The device causes an audible and visual indication, when it receives the acknowledgment signal transmitted from the monitoring station compatible receiver: "Panel- Arming Response from Central Station is Acknowledged"

UL/ULC COMMERCIAL BURGLARY INSTALLATIONS continued...

Protection of the Control Unit:

The local control unit and the local power supply must be protected in one of the following ways:

- The control unit and audible alarm device must be in a protected area which is armed 24 hours a day.
- Each partition must arm the area protecting the control unit and the audible alarm device power supply. This may require duplicate protection armed by each partition. Access to this protected area, without causing an alarm, will require that all partitions be disarmed.
- In all cases described above, the protected area for the control unit must be programmed as not-bypassable

For installations employing packet switched (network) communications such as Cellular/Wi-Fi the following recommendations shall be followed:

- Select the Internet Service Providers that have redundant servers/systems and Back-up power.
- Routers shall have Firewalls enabled and methods to identify and protect against “Denial of Service” attacks (i.e. via “spoofing”).

For UL Commercial Burglary applications the loss of communication with the monitoring station shall be treated as an alarm condition by monitoring station personnel when the burglar alarm system is in the armed state, and as a trouble condition while the system is disarmed. Packet switched data network (PSDN) interface equipment, manufactured by other than the burglar alarm equipment manufacturer, that is not provided with the burglar alarm system and/or not required for the processing of the signals shall be evaluated to the applicable requirements of the Standard for Information Technology Equipment - Safety - Part 1: General Requirements, UL 60950-1, or the Standard for Audio/Video, Information and Communication Technology Equipment - Part 1: Safety Requirements, UL 62368-1, as communication equipment. Any network interface device which adds value or manipulates the original data packet such as changing transmissions formats, adding encryption, and the like, shall comply with the applicable requirements noted in this standard.

UL/ULC COMMERCIAL BURGLARY INSTALLATIONS continued...

User Information:

- The installer should advise the user and note in the User's Manual
- Service organization name and telephone number
- The programmed exit and entry time
- Instructions to test system weekly
- Note that the installer code cannot arm or disarm the system
- The installer should caution the user not to give system information (e.g., codes, bypass methods, etc.) to casual users (e.g., service people) and to only give out codes set to expire within 24 hours
- Identification of the conditions that might be expected to result in false alarms or impaired operation of the product(s): arming the system and not respecting the exit delay, entering the protected premises and not respecting the entry delay for disarming the system can cause false alarms.

FCC & ISED CANADA COMPLIANCE STATEMENT

This Class [B] digital apparatus meets all requirements of the Canadian Interference–Causing Equipment Regulations.

Cet appareil numérique de la classe [B] respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

IMPORTANT! Changes or modifications not expressly approved by Qolsys Inc. could void the user's authority to operate the equipment.

CAUTION! This equipment complies with radiation exposure limits set forth for uncontrolled environment. The antenna(s) used for this transmitters must be installed to provide a separation distance of at least 20 cm from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC & ISED CANADA COMPLIANCE STATEMENT continued...

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC & ISED CANADA COMPLIANCE STATEMENT continued...

Supplier's Declaration of Conformity #202102002
47 CFR § 2.1077 Compliance Information

Unique Identifier: Qolsys, Model QS-SRF319

Responsible Party – U.S. Contact Information

Qolsys Inc.
1900 The Alameda, 4th Floor
San Jose, CA
95126

Phone: (408) 857-8415/Website: www.qolsys.com

FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Supplier's Declaration of Conformity #202102003
47 CFR § 2.1077 Compliance Information

Unique Identifier: Qolsys, Model QS-SRF433

Responsible Party – U.S. Contact Information

Qolsys Inc.
1900 The Alameda, 4th Floor
San Jose, CA
95126

Phone: (408) 857-8415/Website: www.qolsys.com

FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Supplier's Declaration of Conformity #202102001
47 CFR § 2.1077 Compliance Information

Unique Identifier: Qolsys, Model QS-SRF345

Responsible Party – U.S. Contact Information

Qolsys Inc.
1900 The Alameda, 4th Floor
San Jose, CA
95126

Phone: (408) 857-8415/Website: www.qolsys.com

FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

SPECIFICATIONS

SPECIFICATIONS



| Items | Parameters | IQ Hub |
|--------------|------------------|---|
| Platform | Android OS | Android 7.1 |
| LCD Display | Size | 7" LCD |
| | Resolution | 1024 x 600 |
| | RGB | 24bit |
| Touchscreen | Type | Capacitive glass multi-touch |
| User Codes | Up to 242 | Role based (Dealer, Installer, Master, User, Guest, Duress) |
| Wireless | Security R/F | PowerG 912- 915MHz. Up to 128 RF Zones |
| | Z-Wave Plus | Supports up to 152 devices (80 lights, 15 Smart Sockets, 20 Locks, 10 Thermostats, 21 Misc, 6 Garage Doors) |
| | Cellular | LTE (Bands 2,4,5,12,13) |
| | WiFi | Wi-Fi 802.11 a/b/g/n/ac dual band 2.4/5ghz |
| | Bluetooth | Bluetooth Low Energy (BLE) |
| Flash Memory | Internal Storage | 16GB |

SPECIFICATIONS



| Items | Parameters | IQ Hub |
|---------------|--------------------------------|---|
| LED Indicator | Status LED | Green (Disarmed), Red (Armed) |
| Speaker | 2W Mono | |
| Microphone | Microphone | x 1 microphone |
| Siren | | SPL minimum 85dB for UL985 |
| Tamper | Tamper Switch | Wall and Enclosure Tamper |
| Battery | Type | Lithium Polymer 2600mAh. Guangzhou Great Power Energy & Technology CO LTD. Model ICR 18650 |
| Buttons | Standby | Right side button used for sleep/wake, hard reboot, and clean screen cancel |
| Mechanical | Dimension | 6.1”H x 7.7”W x 1”D (155mm x 195mm x 27mm) |
| Power Supply | AC/DC External Plug-in Adapter | Output: 12v 1000mA CC, Input 100-240VAC 50/60Hz. Adapter evaluated at 120vAC for UL/cUL. Sheznzhen Sure-Power Electrical CO LTD. Model SW-120100 |
| Mount | Back Plate | Wall mount or table top (stand included) |
| Certification | UL/cUL/ULC | UL/cUL Residential Fire and Burglary and UL/ULC Commercial Burglary Alarm Control Unit. Compliant with standards: UL985, UL1023, UL2610, ULC-S545, ULC-S304 |
| | FCC | 2AAJXQS-IQHUB |
| | IC | 11205A-QSIQHUB |
| | NOM | |
| Temperature | Operational | 0 to 49C, up to 93% relative humidity, indoor, dry ordinary locations use only |
| | Storage | -20 to 50C |

SUPPORTED POWER-G SENSORS



| Detector Type | Model |
|---|---|
| Door/Window | PG9945 ^{c/CB} , PG9307 ^{UL RB} , PG9309, PG9312 ^{UL CB} |
| Door/Window - Shock Sensor | PG9935 ^{UL CB} |
| Dual Tech (PIR+Microwave) Motion Detector | PG9984 ^{(P)UL CB} |
| Glassbreak Detector | PG9922 ^{UL CB} |
| Heat Detector | PG9936 ^{HUL RF} |
| Keyfobs | PG9929, PG9939, PG9949, PG9938 ^{UL CB} |
| Outdoor Motion Detector | PG9902, PG9974 ^(P) , PG9944, PG9994 ^{(P)UL CB} |
| PIR Motion Detector | PG9904 ^(P) , PG9914, PG9924, PG9934 ^(P) , PG9862, PG9872 ^{UL CB} |
| Sirens | PG9901, PG9911 ^{UL RF/RB} |
| Smoke Detector | PG9916, PG9926, PG9936 ^{UL RF} |
| Wireless CO Detector | PG9913, PG9933 ^{UL RF} |
| Wireless Repeater | PG9920 ^{UL CB} |
| Vanishing Door/Window Contact | PG9303 ^{UL CB} , PG9975 ^{UL RB} |
| PowerG Wired to Wireless Converter | PG9WLSHW8 ^{UL RFB CB} |

NOTE: Only the PowerG sensors marked with ^{UL CB} in the table above shall be used in UL/ULC Residential and Commercial Burg (UL2610/ULC-S304 Security Level I-II) listed installations. Devices marked with ^{UL RB} in the table above shall be used only in UL/ULC Residential Burg (UL1023/ULC-S304 Security Level I) listed installations. Devices marked with ^{UL RF} in the table above can be used in UL/ULC Residential Fire (UL985/ULC-S545) listed installations.

SUPPORTED 319 MHz SENSORS



| Detector Type | Model |
|--------------------|---|
| IQ Door/Window - S | QS1133-840 ^{UL RB} |
| IQ Motion - S | QS1231-840/QS1230-840 ^{UL RB} |
| IQ Glass - S | QS1431-840 ^{UL RB} |
| IQ Hardwire 16-F | QS7133-840 ^{UL RF/RB (NO ULC)} |
| IQ Smoke | QS5110-840 ^{UL RF} |
| IQ CO | QS5210-840 ^{UL RF} |

NOTE: Use only UL/ULC listed devices for UL/ULC certified installations.

SUPPORTED 345 MHz SENSORS



| Detector Type | Model |
|----------------------|--|
| Door/Window Contact | 5816WMWH ^{UL RB (NO ULC)} |
| Door/Window Contact | 5815 ^{UL RB} |
| Motion Detector | 5800PIR-COM ^{UL RB} |
| Motion Detector | 5898 ^{UL RB} |
| Motion Detector | 5800PIR ^{UL RB} |
| Glass Break Detector | 5853 ^{UL RB} |
| Smoke Detector | 5806W3 ^{UL RF (NO ULC)} |
| Smoke Detector | 5808W3 ^{UL RF} |
| Smoke/CO Detector | 5800COMBO ^{UL RF} |
| CO Detector | 5800CO ^{UL RF} |
| CO Detector | GG-CO8345 (2GIG-CO8-345) ^{UL RF (NO ULC)} |

NOTE: Use only UL/ULC listed devices for UL/ULC certified installations.

SUPPORTED 433 MHz SENSORS



| Detector Type | Model |
|--------------------------|------------------------------|
| Door/Window Sensor | WS4945NA ^{UL RB} |
| Motion Detector | WS4904P ^{UL RB} |
| Motion Detector | WLS914-433 ^{UL RB} |
| Glass Break Sensor | WLS912L-433 ^{UL RB} |
| Shock Sensor | EV-DW4927SS ^{UL RB} |
| Smoke Detector | WS4936 ^{UL RF} |
| Carbon Monoxide Detector | WS4933 ^{UL RF} |
| 2 Button Key Fob | WS4949 ^{UL RB} |
| 4 Button Key Fob | WS4939 ^{UL RB} |
| Pendant Button | WS4938 ^{UL RB} |
| Wireless Repeater | WS4920 ^{UL RF/RB} |

NOTE: Use only UL/ULC listed devices for UL/ULC certified installations.

Johnson Controls



PowerG

QS9301-0208-840 (Verizon)
QS9302-0208-840 (AT&T)

319 MHz

QS9301-1200-840 (Verizon)
QS9302-1200-840 (AT&T)
QS9307-1200-124 (Telus)

345 MHz

QS9301-5200-840 (Verizon)
QS9302-5200-840 (AT&T)
QS9307-5200-124 (Telus)

433 MHz

QS9301-4200-840 (Verizon)
QS9302-4200-840 (AT&T)
QS9307-4200-124 (Telus)

Qolsys Inc. proprietary.
Reproduction without permission is not permitted.

Document#: IQH-IM-10-20
Revision Date: 10/27/21
Software version: 3.0.1