



58160D

Outdoor Wireless Contact/Transmitter

The Honeywell Home robust 58160D is a weatherproof, water-resistant outdoor wireless transmitter that provides excellent detection and performance in extreme temperatures. It operates in temperatures from -40° F to 150° F (-40° C to +66° C), (100% RH). The 58160D also contains two unique zones. The first loop is a normally closed circuit contact that can have external devices wired directly to it. The second loop is a built-in magnetic reed switch that can be used to protect gates, sheds, detached garages or any other outdoor area with an exit/entry point. It is also an ideal way to protect outdoor equipment when using outdoor rated magnetic pull apart contacts. With its dark gray housing, the 58160D blends well with most outdoor surroundings and can be custom-painted* to match its mounting surface.

*Recommended Paints: Krylon® "Fusion for Plastic", Rust-Oleum® "Plastic" and Dupli-Color® "Vinyl & Fabric Coating"

All trademarks are properties of their respective owners.




FEATURES AND BENEFITS


- Weather-proof and water-resistant housing makes it ideal for harsh outdoor climates -40°F to 150°F (-40°C to +66°C), (100% RH)
- Maximum magnet gap 1.75" on wood, vinyl and non-metallic surfaces and 1.25" on steel to facilitate easier installation
- Two long life AA lithium batteries, easily replaceable
- Built-in reed switch contact loop
- Built-in wired closed contact loop (for use with external devices)
- Tamper protection-removal of front cover and transmitter from mounting plate
- Screw mountable
- Stainless steel or nylon cable tie mountable (ties not included)
- Magnet and magnet spacer included
- Paintable plastic housing to match any surface

MOUNTING


COMPONENT IDENTIFICATION

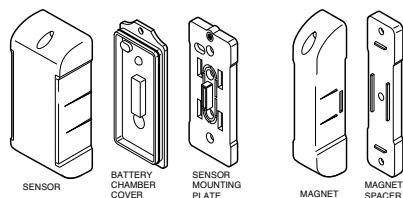

FLAT SURFACES

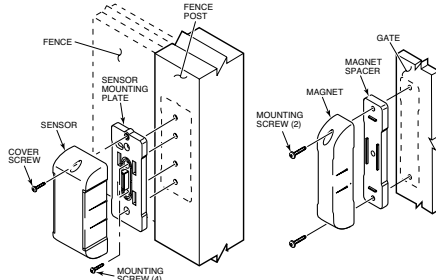

CURVED SURFACES

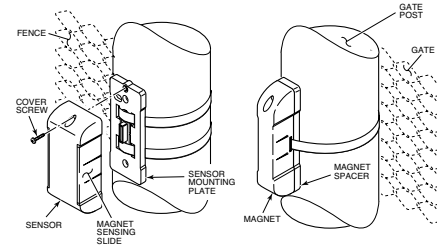

58160D Technical Specifications


Dimensions:

Sensor: 2.01" W x 4.25" H x 1.4" D
(51mm x 108mm x 35.6mm high off mounting surface)

Magnet: .89" W x 4.02" H x .92" D
(22.5mm x 102mm x 23.27mm)

UL Listings: UL634, UL1023,
ULC C1023, ULC-ORD-C634-86

Moisture Resistance: NEMA 4X rated

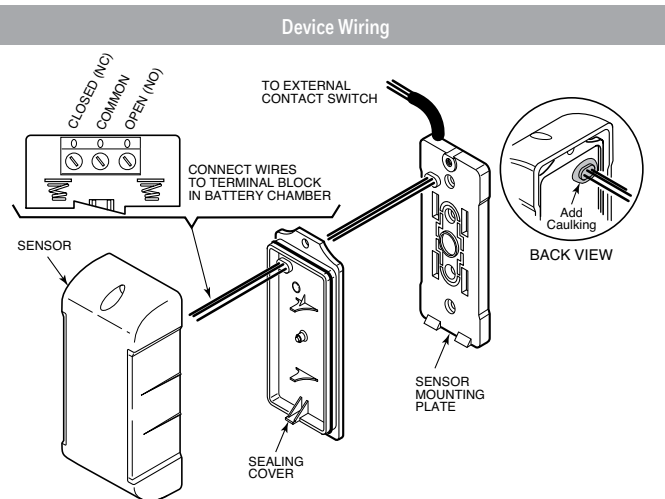

Battery Installation and Replacement IMPORTANT:


Change both batteries at the same time. Do not mix weak batteries with new batteries.

Use two (2) lithium 1.5VDC AA cells. Use Eveready's Energizer® Ultimate LITHIUM AA batteries, Honeywell Home part number **462**.

OBSERVE BATTERY POLARITY.

Battery Replacement:

1. Remove cover screw and swing Sensor to remove from Sensor Mounting Plate.
2. Use screwdriver in any pivot point and pry Battery Chamber Cover off. Replace batteries.
3. Orient Battery Chamber Cover so the screw hole lines up with the screw hole in the sensor cover, and press to close.
4. Engage Sensor tabs into mating holes in Sensor Mounting Plate and swing closed. Secure with cover screw.

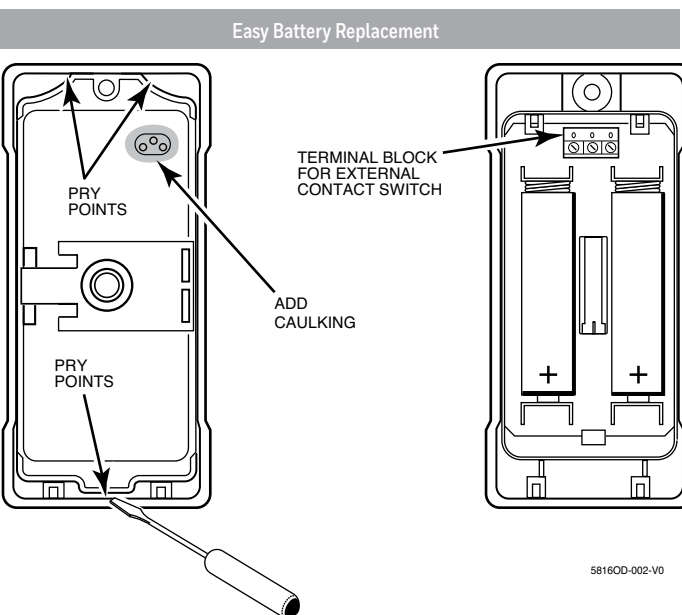

ORDERING

58160D

Outdoor Wireless Residential/Commercial Contact/
Transmitter

For more information

security.honeywellhome.com/hsc



Resideo Technologies, Inc.

2 Corporate Center Drive, Suite 100
P.O. Box 9040
Melville, NY 11747
1-800-645-7492
resideo.com

L/58160DD/D | 06/19
© 2019 Resideo Technologies, Inc.
This product is manufactured
by Resideo and its affiliates. The
Honeywell Home trademark is
used under license from Honeywell
International Inc. All rights reserved.

Honeywell Home