

## RE605 Temp Range, CryptiX™-Compatible

### Features

- Freeze and Overheat warnings.
  - Can be used as any or all of the functions.
- Cover tamper for each Zone.
- Strong, reliable RF signal.
- 8-10 year battery life on CR123A battery.
- Low Battery indication.
- 3.3x1.4x1.1 inches.

### Key Instructions

- Battery “+” faces towards spring.


### Enrolling

- Place panel in enrollment mode.
- Tamper the device
- By default the Freeze will enroll first - to change to just the overheat, or add the overheat go to [resolutionproducts.com/helixsetup](http://resolutionproducts.com/helixsetup)

### Specifications

Freeze Alarm Temp:	45F +/- 2F
Freeze Restore:	when temp increases 4F from alarm
Overheat Alarm Temp:	100F +/- 2F
Overheat Restore:	when temp decreases 4F from alarm
Magnet Trip Distance:	1 inch nominal
Mounting hardware:	# 4 or #6 screws
Replacement Battery:	CR123A 1550 mAH
Temperature Range:	0F to 120F
Housing dimensions:	3.3x1.4x1.1 inches
Supervisory:	Every hour

Specifications subject to change without notice.



## RE605 Temp Range, CryptiX™-Compatible

### Features

- Freeze and Overheat warnings.
  - Can be used as any or all of the functions.
- Cover tamper for each activated Zone.
- Strong, reliable RF signal.
- 8-10 year battery life on CR123A battery.
- Low Battery indication.
- 3.3x1.4x1.1 inches.

### Key Instructions

- Battery “+” faces towards spring.

### Enrolling


- Place panel in enrollment mode.
- Tamper the device
- By default the Freeze will enroll first - to change to just the overheat, or add the overheat go to [resolutionproducts.com/helixsetup](http://resolutionproducts.com/helixsetup)

### Specifications

Freeze Alarm Temp:	45F +/- 2F
Freeze Restore:	when temp increases 4F from alarm
Overheat Alarm Temp:	100F +/- 2F
Overheat Restore:	when temp decreases 4F from alarm
Magnet Trip Distance:	1 inch nominal
Mounting hardware:	# 4 or #6 screws
Replacement Battery:	CR123A 1550 mAH
Temperature Range:	0F to 120F
Housing dimensions:	3.3x1.4x1.1 inches
Supervisory:	Every hour

Specifications subject to change without notice.

## Internal Picture

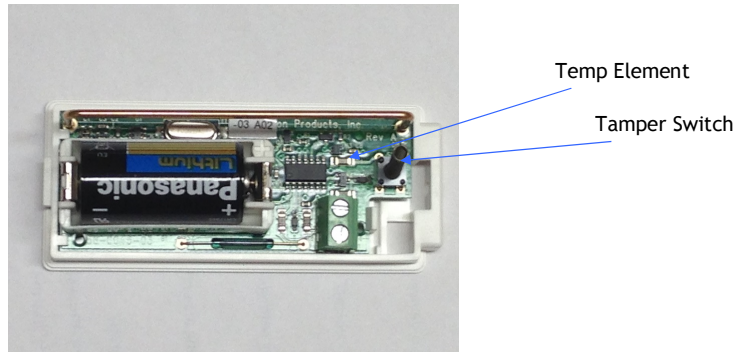

## Notices

### Warranty

Resolution Products, Inc. will replace products that are defective in their first five (5) years.

### FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

This device may not cause harmful interference.

This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.

FCC ID: U5X-RE301

### IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and

(2) This device must accept any interference, including interference that may cause undesired operation of the device.


Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC: 8310A-RE301

## Internal Picture

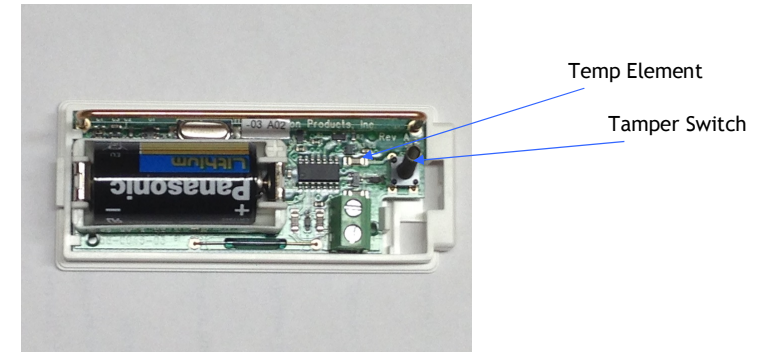

## Notices

### Warranty

Resolution Products, Inc. will replace products that are defective in their first five (5) years.

### FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

This device may not cause harmful interference.

This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.

FCC ID: U5X-RE301

### IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC: 8310A-RE301